



REF: 2011-13-INF-1092 v1

Created by: CERT8

Target: Expediente

Revised by: CALIDAD

Date: 17.12.2012

Approved by: TECNICO

CERTIFICATION REPORT

File: 2011-13 POLYMNIE LDS BAP applet

Applicant: B340709534 OBERTHUR TECHNOLOGIES

References:

[EXT-1367] Certification request of LDS EAC Java Applet in BAP configuration with AA v2.2

[EXT-1917] Evaluation Technical Report of LDS EAC Java Applet in BAP configuration with AA v2.2, version M4.

The product documentation referenced in the above documents.

Certification report of the product LDS EAC Java Applet in BAP configuration with AA v2.2, as requested in [EXT-1367] dated 10-06-2011, and evaluated by the laboratory Applus LGAI Technological Center S.A., as detailed in the Evaluation Technical Report [EXT-1917] received on 26/10/2012.



TABLE OF CONTENTS

| | |
|---|-----------|
| EXECUTIVE SUMMARY | 3 |
| TOE SUMMARY | 3 |
| SECURITY ASSURANCE REQUIREMENTS | 5 |
| SECURITY FUNCTIONAL REQUIREMENTS | 5 |
| IDENTIFICATION | 6 |
| SECURITY POLICIES | 7 |
| ASSUMPTIONS AND OPERATIONAL ENVIRONMENT..... | 8 |
| CLARIFICATIONS ON NON-COVERED THREATS | 9 |
| OPERATIONAL ENVIRONMENT FUNCTIONALITY | 12 |
| ARCHITECTURE..... | 14 |
| DOCUMENTS | 15 |
| PRODUCT TESTING..... | 15 |
| PENETRATION TESTING..... | 16 |
| EVALUATED CONFIGURATION | 17 |
| EVALUATION RESULTS..... | 17 |
| COMMENTS & RECOMMENDATIONS FROM THE EVALUATION TEAM..... | 18 |
| CERTIFIER RECOMMENDATIONS | 18 |
| GLOSSARY | 18 |
| BIBLIOGRAPHY..... | 19 |
| SECURITY TARGET..... | 20 |



EXECUTIVE SUMMARY

This document constitutes the Certification Report for the certification file of the product LDS EAC Java Applet in BAP configuration with AA v2.2.

The TOE is composed of both an Integrated Circuit (IC), JavaCard platform and a loaded applet providing secure data management following [ISO18013-1], [ISO18013-2] and [ISO18013-3] BAP IDL specifications and Active Authentication. The Target of Evaluation is therefore a composite TOE.

Developer/manufacturer: Oberthur Technologies.

Sponsor: Oberthur Technologies.

Certification Body: Centro Criptológico Nacional (CCN) del Centro Nacional de Inteligencia (CNI).

ITSEF: Applus LGAI Technological Center S.A..

Protection Profile: No conformance to any Protection Profile is claimed

Evaluation Level: Common Criteria version 3.1 revision 3, EAL4 + ALC_DVS.2.

Evaluation end date: 09/10/2012.

All the assurance components required by the evaluation level EAL4 (augmented with ALC_DVS.2) have been assigned a "PASS" verdict. Consequently, the laboratory Applus LGAI Technological Center S.A. assigns the "PASS" VERDICT to the whole evaluation due all the evaluator actions are satisfied for the EAL4 + ALC_DVS.2, as defined by the Common Criteria version 3.1 revision 3 and the Common Methodology for Information Technology Security Evaluation version 3.1 revision 3.

Considering the obtained evidences during the instruction of the certification request of the product LDS EAC Java Applet in BAP configuration with AA v2.2, a positive resolution is proposed.

TOE SUMMARY

The Target of Evaluation (TOE) is a smartcard composed of the following components:

- An ID One Cosmo v7.0.1-n JavaCard platform including Global Platform support and a cryptographic library,
- LDS EAC Java Applet in BAP configuration with AA v2.2

The Logical Data Structure (LDS) application is a generic filesystem that can be configured to match especially ICAO specifications for ePassports BAC and EAC



and ISO specifications for IDL BAP and EAP. The configuration in the scope of this certification report is the IDL BAP specification of this application.

The main features provided by the LDS EAC Java Applet in BAP configuration with AA v2.2 and present in the evaluation scope are summarized in the following table:

| Feature | Embedded in the product | In the Certificate scope |
|--|-------------------------|--------------------------|
| BAC | Yes | No |
| EAC | Yes | No |
| Active Authentication (DES, AES, RSA CRT and ECC) | Yes | Yes |
| Cryptosystem migration (Algorithm change during certificate verification transaction) | Yes | No |
| BAP | Yes | Yes |
| EAP | Yes | No |

The TOE in the scope of this Certification Report provides Basic Access Protection according to [ISO18013-1][ISO18013-2][ISO18013-3] and Active Authentication mechanisms.

The Basic Access Protection (BAP) is especially used in the context of IDL as an alternative to BAC. Indeed it is actually a generalization of BAC allowing usage of extra algorithms and key length. It exists in 4 modes:

- BAP1 - 3DES with key length of 128 bits (equivalent to BAC),
- BAP2 - AES with key length of 128 bits,
- BAP3 - AES with key length of 192 bits,
- BAP4 - AES with key length of 256 bits.

Following Secure messaging is performed using the algorithm used in the selected BAP mode.

Note that the term MRZ is specific to ICAO standard; [ISO18013-3] uses the term "Keydoc" which refers to an equivalent unique identifier printed on the physical TOE as a random number or barcode.

The Active Authentication of the TOE is an optional feature that may be implemented. It ensures that the TOE has not been substituted, by means of a challenge-response protocol between the inspection system and the TOE. For this purpose the chip contains its own Active Authentication DES/AES key or RSA/ECC Key pair. A hash representation of Data Group 15 Secret/Public key is stored in the Document Security Object and therefore authenticated by the issuer's digital signature. If any, the corresponding Private Key is stored in the TOE's secure



memory. Note that the access to DG15 is disabled if a secret key is stored. The TOE supports the loading and generation of the Active Authentication DES/AES key or RSA/ECC Key pair.

Some features of the product are put out of the evaluation scope and are therefore not part of the TOE. Here is the complete list of those functionalities:

- Standard and biometric PIN management (therefore PIN associated commands are out of scope).

SECURITY ASSURANCE REQUIREMENTS

The product was evaluated with all the evidence required to fulfil the evaluation level EAL4 and the evidences required by the additional components ALC_DVS.2, according to Common Criteria version 3.1 revision 3.

| Assurance Class | Assurance components |
|---------------------------------|--|
| ADV: Development | ADV_ARC.1 Security architecture description |
| | ADV_FSP.4 Complete functional specification |
| | ADV_IMP.1 Implementation representation of the TSF |
| | ADV_TDS.3 Basic modular design |
| AGD: Guidance documents | AGD_OPE.1 Operational user guidance |
| | AGD_PRE.1 Preparative procedures |
| ALC: Life-cycle support | ALC_CMC.4 Production support, acceptance procedures and automation |
| | ALC_CMS.4 Problem tracking CM coverage |
| | ALC_DEL.1 Delivery procedures |
| | ALC_DVS.2 Sufficiency of security measures |
| | ALC_LCD.1 Developer defined life-cycle model |
| | ALC_TAT.1 Well-defined development tools |
| ASE: Security Target evaluation | ASE_CCL.1 Conformance claims |
| | ASE_ECD.1 Extended components definition |
| | ASE_INT.1 ST introduction |
| | ASE_OBJ.2 Security objectives |
| | ASE_REQ.2 Derived security requirements |
| | ASE_SPD.1 Security problem definition |
| | ASE_TSS.1 TOE summary specification |
| ATE: Tests | ATE_COV.2 Analysis of coverage |
| | ATE_DPT.1 Testing: basic design |
| | ATE_FUN.1 Functional testing |
| | ATE_IND.2 Independent testing - sample |
| AVA: Vulnerability assessment | AVA_VAN.3 Focused vulnerability analysis |

SECURITY FUNCTIONAL REQUIREMENTS

The product security functionality satisfies the following functional requirements, according to the Common Criteria version 3.1 revision 3:



MINISTERIO DE LA PRESIDENCIA
CENTRO NACIONAL DE INTELIGENCIA
CENTRO CRIPTOLÓGICO NACIONAL
ORGANISMO DE CERTIFICACIÓN



| Class | Components |
|---|--|
| FAU: Security Audit | FAU_SAS.1 Audit storage |
| FCS: Cryptographic Support | FCS_CKM.1/Cryptographic key generation |
| | FCS_CKM.4 Cryptographic key destruction |
| | FCS_COP.1/SHA Cryptographic operation |
| | FCS_COP.1/ENC Cryptographic operation |
| | FCS_COP.1/MAC Cryptographic operation |
| | FCS_COP.1/AUTH Cryptographic operation |
| | FCS_RND.1 Quality metric for random numbers |
| FIA: Identification and Authentication | FIA_AFL.1 Authentication failure handling |
| | FIA_UID.1 Timing of identification |
| | FIA_UAU.1 Timing of authentication |
| | FIA_UAU.4 Single-use authentication mechanisms |
| | FIA_UAU.5 Multiple authentication mechanisms |
| | FIA_UAU.6 Re-authenticating |
| FDP: User Data Protection | FDP_ACC.1 Subset access control |
| | FDP_ACF.1 Basic Security attribute based access control |
| | FDP_UCT.1 Basic data exchange confidentiality |
| | FDP_UIT.1 Data exchange integrity |
| FMT: Security Management | FMT_SMF.1 Specification of Management Functions |
| | FMT_SMR.1 Security roles |
| | FMT_LIM.1 Limited capabilities |
| | FMT_LIM.2 Limited availability |
| | FMT_MTD.1/INI_ENA Management of TSF data |
| | FMT_MTD.1/INI_DIS Management of TSF data |
| | FMT_MTD.1/KEY_WRITE Management of TSF data |
| FPT: Protection of the Security Functions | FPT_EMSEC.1 TOE Emanation |
| | FPT_FLS.1 Failure with preservation of secure state |
| | FPT_TST.1 TSF testing |
| | FPT_PHP.3 Resistance to physical attack |
| Active Authentication | |
| FCS: Cryptographic Support | FCS_COP.1/SIG_MRTD Cryptographic Operation |
| | FCS_CKM.1/ASYM Cryptographic key generation |
| FDP: User Data Protection | FDP_DAU.1/AA Basic Data Authentication |
| | FDP_ITC.1/AA Import of user data without security attributes |
| FMT: Security Management | FMT_MOF.1/AA Management of security functions behaviour |
| Basic Access Protocol (BAP) | |
| FCS: Cryptographic Support | FCS_COP.1/BAP Cryptographic Operation |
| | FCS_CKM.1/BAP Cryptographic key generation |
| | FCS_COP.1/BAP-SM Cryptographic Operation |

IDENTIFICATION

Product: LDS EAC Java Applet in BAP configuration with AA v2.2

Security Target: Polymnie Security Target BAP issue:7.

Protection Profile: No conformance to any Protection Profile is claimed.

Evaluation Level: Common Criteria version 3.1 revision 3 EAL4 + ALC_DVS.2.



SECURITY POLICIES

The use of the product LDS EAC Java Applet in BAP configuration with AA v2.2 shall implement a set of security policies assuring the fulfilment of different standards and security demands.

The detail of these policies is documented in the Security Target. In short, it establishes the need of implementing organisational policies related to the following aspects.

Policy 01: P.Manufact

The Initialization Data are written by the IC Manufacturer to identify the IC uniquely. The MRD Manufacturer writes the Pre-personalization Data which contains at least the Personalization Agent Key.

Policy 02: P.Personalization

The issuing Organisation guarantees the correctness of the biographical data, the printed portrait and the digitized portrait, the biometric reference data and other data of the logical MRD with respect to the MRD holder. The personalization of the MRD for the holder is performed by an agent authorized by the issuing Organisation only.

Policy 03: P.Personal_Data

The biographical data and their summary printed in the Keydoc and stored on the MRD's chip, the printed portrait and the digitized portrait, the biometric reference data of finger(s), the biometric reference data of iris image(s) and data according to LDS stored on the MRD's chip are personal data of the MRD holder. These data groups are intended to be used only with agreement of the MRD holder by inspection systems to which the MRD is presented. The MRD's chip shall provide the possibility for the Basic Access Protection to allow read access to these data only for terminals successfully authenticated based on knowledge of the Document Basic Access Keys as defined in [ICAO_P1].

Those data are stored in DGs as specified by in EF.COM.

Policy 04: P.Sensitive_Data_Protection

All the sensitive data are at least protected in integrity. The keys are protected in both integrity and confidentiality.

Policy 05: P.Key_Function

All the cryptographic routines are designed in such a way that they are protected against probing and do not cause any information leakage that may be used by an attacker.



ASSUMPTIONS AND OPERATIONAL ENVIRONMENT

The following assumptions are constraints to the conditions used to assure the security properties and functionalities compiled by the security target. These assumptions have been applied during the evaluation in order to determine if the identified vulnerabilities can be exploited.

In order to assure the secure use of the TOE, it is necessary to start from these assumptions for its operational environment. If this is not possible and any of them could not be assumed, it would not be possible to assure the secure operation of the TOE.

Assumption 01: A.MRD_Manufact

It is assumed that appropriate functionality testing of the MRD is used. It is assumed that security procedures are used during all manufacturing and test operations to maintain confidentiality and integrity of the MRD and of its manufacturing and test data (to prevent any possible copy, modification, retention, theft or unauthorized use).

Assumption 02: A.MRD_Delivery

Procedures shall guarantee the control of the TOE delivery and storage process and conformance to its objectives:

- Procedures shall ensure protection of TOE material/information under delivery and storage.
- Procedures shall ensure that corrective actions are taken in case of improper operation in the delivery process and storage.
- Procedures shall ensure that people dealing with the procedure for delivery have got the required skill.

Assumption 03: A.Pers_Agent

The Personalization Agent ensures the correctness of (i) the logical MRD with respect to the MRD holder, (ii) the Document Basic Access Keys, (iii) the Chip Authentication Public Key if stored on the MRD's chip, and (iv) the Document Signer Public Key Certificate (if stored on the MRD's chip). The Personalization Agent signs the Document Security Object. The Personalization Agent bears the Personalization Agent Authentication to authenticate himself to the TOE by symmetric cryptographic mechanisms.

Assumption 04: A.Insp_Sys

The Inspection System is used by the officer of the receiving Organisation (i) examining an MRD presented by the holder and verifying its authenticity and (ii) verifying the holder as MRD holder. The Basic Inspection System for global interoperability (i) includes the Organisation Signing Public Key and the Document Signer Public Key of each issuing Organisation, and (ii) implements the terminal part of the Basic Access Protection [ISO18013-3]. The Basic Inspection System reads the logical MRD under Basic Access Protection and performs the Passive Authentication to verify the logical MRD.



Assumption 05: A.BAP-Keys

The Document Basic Access Protection Keys being generated and imported by the issuing Organisation have to provide sufficient cryptographic strength. As a consequence of the "ICAO Doc 9303" [ICAO_P1] and "ISO 18013-3" [ISO18013-3], the Document Basic Access Protection Keys are derived from a defined subset of the individual printed Keydoc data. It has to be ensured that these data provide sufficient entropy to withstand any attack based on the decision that the inspection system has to derive Document Access Keys from the printed Keydoc data with enhanced basic attack potential.

CLARIFICATIONS ON NON-COVERED THREATS

The following threats do not suppose a risk for the product LDS EAC Java Applet in BAP configuration with AA v2.2, although the agents implementing attacks have a enhanced-basic attack potential according to the assurance level of EAL4 + ALC_DVS.2 and always fulfilling the usage assumptions and the proper security policies satisfaction.

For any other threat not included in this list, the evaluation results of the product security properties and the associated certificate, do not guarantee any resistance.

The threats covered by the security properties of the TOE are categorized below.

Threat 01: T.Chip_ID

Adverse action: An attacker trying to trace the movement of the MRD by identifying remotely the MRD's chip by establishing or listening to communications through the contactless communication interface.

Threat agent: having enhanced basic attack potential, not knowing the optically readable Keydoc data printed on the MRD data page in advance

Asset: Anonymity of user

Threat 02: T.Skimming

Adverse action: An attacker imitates an inspection system trying to establish a communication to read the logical MRD or parts of it via the contactless communication channel of the TOE.

Threat agent: having enhanced basic attack potential, not knowing the optically readable Keydoc data printed on the MRD data page in advance.

Asset: confidentiality of logical MRD data.

Threat 03: T.Eavesdropping

Adverse action: An attacker is listening to an existing communication between the MRD's chip and an inspection system to gain the logical MRD or parts of it. The inspection system uses the Keydoc data printed on the MRD data page but the attacker does not know these data in advance.



Threat agent: having enhanced basic attack potential, not knowing the optically readable Keydoc data printed on the MRD data page in advance.

Asset: confidentiality of logical MRD data.

Threat 04: T.Forgery

Adverse action: An attacker alters fraudulently the complete stored logical MRD or any part of it including its security related data in order to deceive on an inspection system by means of the changed MRD holder's identity or biometric reference data. This threat comprises several attack scenarios of MRD forgery. The attacker may alter the biographical data on the biographical data page of the passport book, in the printed Keydoc and in the digital Keydoc to claim another identity of the holder. The attacker may alter the printed portrait and the digitized portrait to overcome the visual inspection of the inspection officer and the automated biometric authentication mechanism by face recognition. The attacker may alter the biometric reference data to defeat automated biometric authentication mechanism of the inspection system. The attacker may combine data groups of different logical MRDs to create a new forged MRD, e.g. the attacker writes the digitized portrait and optional biometric reference finger data read from the logical MRD of a holder into another MRD's chip leaving their digital Keydoc unchanged to claim the identity of the holder this MRD. The attacker may also copy the complete unchanged logical MRD to another contactless chip.

Threat agent: having enhanced basic attack potential, being in possession of one or more legitimate MRDs.

Asset: authenticity of logical MRD data.

Threat 05: T.Abuse-Func

Adverse action: An attacker may use functions of the TOE which shall not be used in the phase "Operational Use" in order (i) to manipulate User Data, (ii) to manipulate (explore, bypass, deactivate or change) security features or functions of the TOE or (iii) to disclose or to manipulate TSF Data.

This threat addresses the misuse of the functions for the initialization and the personalization in the operational Organisation after delivery to MRD holder.

Threat agent: having enhanced basic attack potential, being in possession of a legitimate MRD.

Asset: confidentiality and authenticity of logical MRD and TSF data, correctness of TSF.

Threat 06: T.Information_Leakage



Adverse action: An attacker may exploit information which is leaked from the TOE during its usage in order to disclose confidential TSF data. The information leakage may be inherent in the normal operation or caused by the attacker. Leakage may occur through emanations, variations in power consumption, I/O characteristics, clock frequency, or by changes in processing time requirements. This leakage may be interpreted as a covert channel transmission but is more closely related to measurement of operating parameters, which may be derived either from measurements of the contactless interface (emanation) or direct measurements (by contact to the chip still available even for a contactless chip) and can then be related to the specific operation being performed. Examples are the Differential Electromagnetic Analysis (DEMA) and the Differential Power Analysis (DPA). Moreover the attacker may try actively to enforce information leakage by fault injection (e.g. Differential Fault Analysis).

Threat agent: having enhanced basic attack potential, being in possession of a legitimate MRD.

Asset: confidentiality of logical MRD and TSF data.

Threat 07: T.Phys-Tamper

Adverse action: An attacker may perform physical probing of the MRD's chip in order (i) to disclose TSF Data or (ii) to disclose/reconstruct the MRD's chip Embedded Software. An attacker may physically modify the MRD's chip in order to (i) modify security features or functions of the MRD's chip, (ii) modify security functions of the MRD's chip Embedded Software, (iii) modify User Data or (iv) to modify TSF data.

The physical tampering may be focused directly on the disclosure or manipulation of TOE User Data (e.g. the biometric reference data for the inspection system) or TSF Data (e.g. authentication key of the MRD's chip) or indirectly by preparation of the TOE to following attack methods by modification of security features (e.g. to enable information leakage through power analysis). Physical tampering requires direct interaction with the MRD's chip internals. Techniques commonly employed in IC failure analysis and IC reverse engineering efforts may be used. Before that, the hardware security mechanisms and layout characteristics need to be identified. Determination of software design including treatment of User Data and TSF Data may also be a pre-requisite. The modification may result in the deactivation of a security function. Changes of circuitry or data can be permanent or temporary.

Threat agent: having enhanced basic attack potential, being in possession of a legitimate MRD.

Asset: confidentiality and authenticity of logical MRD and TSF data, correctness of TSF.



Threat 08: T.Malfunction

Adverse action: An attacker may cause a malfunction of TSF or of the MRD's chip Embedded Software by applying environmental stress in order to (i) deactivate or modify security features or functions of the TOE or (ii) circumvent, deactivate or modify security functions of the MRD's chip Embedded Software.

This may be achieved e.g. by operating the MRD's chip outside the normal operating conditions, exploiting errors in the MRD's chip Embedded Software or misusing administration function. To exploit these vulnerabilities an attacker needs information about the functional operation.

Threat agent: having enhanced basic attack potential, being in possession of a legitimate MRD.

Asset: confidentiality and authenticity of logical MRD and TSF data, correctness of TSF.

Threat 09: T.Counterfeit

Adverse action: An attacker with enhanced basic attack potential produces an unauthorized copy or reproduction of a genuine MRD's chip to be used as part of a counterfeit MRD. This violates the authenticity of the MRD's chip used for authentication of a traveller by possession of a MRD. The attacker may generate a new data set or extract completely or partially the data from a genuine MRD's chip and copy them on another appropriate chip to imitate this genuine MRD's chip.

Threat agent: having enhanced basic attack potential, being in possession of one or more legitimate MRDs.

Asset: authenticity of logical MRTD data.

OPERATIONAL ENVIRONMENT FUNCTIONALITY

The product requires the cooperation from its operational environment to fulfil some of the objectives of the defined security problem.

The security objectives declared for the TOE operational environment are categorized below.

Environment objective 01: OE.MRD_Manufact

Appropriate functionality testing of the TOE shall be used in step 4 to 6.

During all manufacturing and test operations, security procedures shall be used through phases 4, 5 and 6 to maintain confidentiality and integrity of the TOE and its manufacturing and test data.

Environment objective 02: OE.MRD_Delivery



Procedures shall ensure protection of TOE material/information under delivery including the following objectives:

- non-disclosure of any security relevant information, o identification of the element under delivery,
- meet confidentiality rules (confidentiality level, transmittal form, reception acknowledgment),
- physical protection to prevent external damage,
- secure storage and handling procedures (including rejected TOE"s),
- traceability of TOE during delivery including the following parameters:
 - o origin and shipment details,
 - o reception, reception acknowledgement,
 - o location material/information.

Procedures shall ensure that corrective actions are taken in case of improper operation in the delivery process (including if applicable any non-conformance to the confidentiality convention) and highlight all non-conformance to this process.

Procedures shall ensure that people (shipping department, carrier, reception department) dealing with the procedure for delivery have got the required skill, training and knowledge to meet the procedure requirements and be able to act fully in accordance with the above expectations.

Environment objective 03: OE.Personalization

The issuing Organisation must ensure that the Personalization Agents acting on behalf of the issuing Organisation (i) establish the correct identity of the holder and create biographical data for the MRD, (ii) enroll the biometric reference data of the MRD holder i.e. the portrait, the encoded finger image(s) and/or the encoded iris image(s) and (iii) personalize the MRD for the holder together with the defined physical and logical security measures to protect the confidentiality and integrity of these data.

Environment objective 04: OE.Pass_Auth_Sign

The issuing Organisation must (i) generate a cryptographic secure Organisation Signing CA Key Pair, (ii) ensure the secrecy of the Organisation Signing CA Private Key and sign Document Signer Certificates in a secure operational environment, and (iii) distribute the Certificate of the Organisation Signing CA Public Key to receiving Organisations and Organizations maintaining its authenticity and integrity. The issuing Organisation must (i) generate a cryptographic secure Document Signer Key Pair and ensure the secrecy of the Document Signer Private Keys, (ii) sign Document Security Objects of genuine MRD in a secure operational environment only and (iii) distribute the Certificate of the Document Signer Public Key to receiving Organisations and Organizations. The digital signature in the Document Security Object relates all data in the data in EF.DG1 to EF.DG24 if stored in the LDS according to [ICAO_P1],[ISO18013-2]].

Environment objective 05: OE.BAP-Keys

The Document Basic Access Protection Keys being generated and imported by the issuing Organisation have to provide sufficient cryptographic strength. As a consequence of the "ICAO Doc 9303" [ICAO_P1] and "ISO 18013-3" [ISO18013-3] , the Document Basic Access Protection Keys are derived from a defined subset of the individual printed Keydoc data. It has to be ensured that these data provide sufficient entropy to withstand any attack based on the decision that the inspection system has to derive Document Basic Access Keys from the printed Keydoc data with enhanced basic attack potential.



Receiving State or Organization

The receiving State or Organization will implement the following security objectives of the TOE environment.

Environment objective 06: OE.Exam_MRD

The inspection system of the receiving Organisation must examine the MRD presented by the holder to verify its authenticity by means of the physical security measures and to detect any manipulation of the physical MRD. The Basic Inspection System for global interoperability (i) includes the Organisation Signing Public Key and the Document Signer Public Key of each issuing Organisation, and (ii) implements the terminal part of the Basic Access Protection [ISO18013-3] .

Environment objective 07: OE.Passive_Auth_Verif

The officer of the receiving Organisation uses the inspection system to verify the holder as MRD holder. The inspection systems must have successfully verified the signature of Document Security Objects and the integrity data elements of the logical MRD before they are used. The receiving Organisations and Organizations must manage the Organisation Signing Public Key and the Document Signer Public Key maintaining their authenticity and availability in all inspection systems.

Environment objective 08: OE.Prot_Logical_MRD


The inspection system of the receiving Organisation ensures the confidentiality and integrity of the data read from the logical MRD. The receiving Organisation examining the logical MRD being under Basic Access Protection will use inspection systems which implement the terminal part of the Basic Access Protection and use the secure messaging with fresh generated keys for the protection of the transmitted data (i.e. Basic Inspection Systems).

The details of the product operational environment (assumptions, threats and organisational security policies) and the TOE security requirements are detailed in the associated security target.

ARCHITECTURE

The Target of Evaluation (TOE) is a smartcard composed of the following components:

- An ID One Cosmo v7.0.1-n JavaCard platform including Global Platform support and a cryptographic library,
- An LDS applet providing the BAP features loaded on the platform.

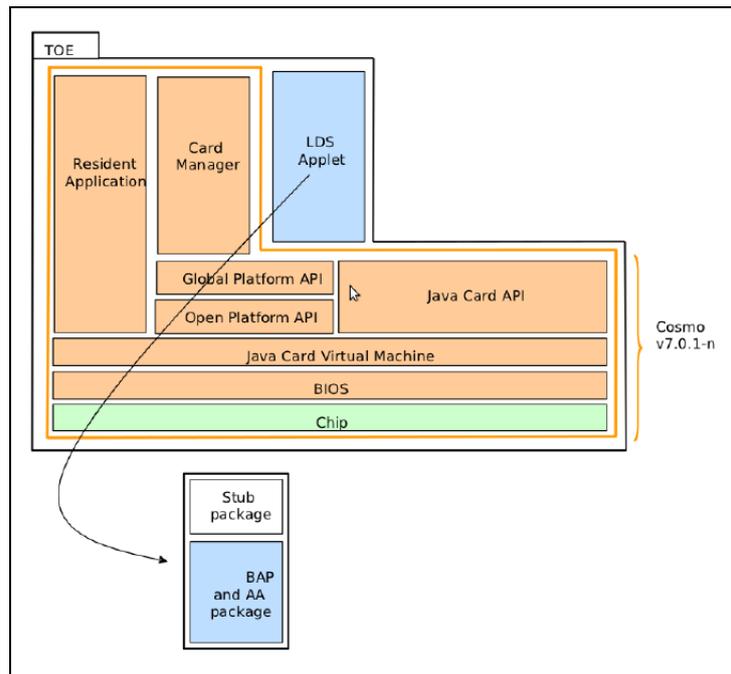

DOCUMENTS

The product includes the following documents that shall be distributed and made available together to the users of the evaluated version.

- Polymnie AGD_OPE ed.2
 - o Code: FQR 220 0437 Edition: 2 Date: 14/12/2011
 - o The current document aims at ensuring Common Criteria requirements for the POLYMNIE project by fully describing the AGD_OPE.
- Polymnie AGD_PRE ed.3
 - o Code: FQR 220 0406 Edition: 3 Date: 27/01/2012
 - o The current document aims at ensuring Common Criteria requirements for the POLYMNIE project by fully describing the AGD_PRE.
- LDS EAC V2.2 Java Applet SOFTWARE REQUIREMENTS SPECIFICATIONS SRS v edAB.
 - o **Code:** 067007 00 Edition: 7-AB Date: 26/01/2011
 - o This document defines the functional characteristics of the Oberthur Technologies LDS EAC applet. It contains the full description of the supported file structure elements, as well as the APDU commands available during the personalization phase and the use phase.

PRODUCT TESTING

The evaluation has been performed according to the composite evaluation methodology defined in the guides [COMP_JIL] and [COMP_CCRA] in order to



assess that the combination of the TOE with the underlying platform did not lead to any exploitable vulnerability. The Java Card Platform and the microcontroller have already been certified.

This evaluation has then taken into account the evaluation results and security recommendations for the following platforms which are part of the evaluated composite TOE:

- ANSSI-CC-2011/64
- ANSSI-CC-2010/40
- BSI-DSZ-CC-0645-2010
- BSI-DSZ-CC-0555-2009

The developer has executed test for all the declared security functions. All the tests have been performed by the developer in its premises, with a satisfactory result. During the evaluation process it has been verified each unit test checking that the security functionality that covers is been identified and also that the kind of test is appropriate to the function that is intended to test.

All the tests have been developed using the testing scenario appropriate to the established architecture in the security target. It has also been checked that the obtained results during the tests fit or correspond to the previously estimated results.

To verify the results of the developer tests, the evaluation team has applied a sampling strategy and concluded that the given information is complete and coherent to reproduce tests and identify the functionality tested. Moreover, additional tests where proposed independently of the developer. These tests covered ePassport BAP functionalities and tested the underlying RNG.

It has been checked that the obtained results conform to the expected results and in the cases where a deviation in respect to the expected results was present, the evaluator has confirmed that this variation neither represents any security problem nor a decrease in the functional capacity of the product.

PENETRATION TESTING

Based on the list of potential vulnerabilities applicable to the TOE in its operational environment, the evaluation team has devised attack scenarios for penetration tests according to JIL supporting documents such as [JILAAPS]. Within these activities all aspects of the security architecture which were not covered by functional testing have been considered.

The implementation of the requirements of the provided platform's ETR for Composition and guidance, as well as of the security mechanisms of the applet in general has been verified by the evaluation team. An appropriate test set was devised to cover these potential vulnerabilities.



The overall test result is that no deviations were found between the expected and the actual test results. No attack scenario with the attack potential **Enhanced-Basic** has been successful in the TOE's operational environment as defined in the security target when all measures required by the developer are applied.

EVALUATED CONFIGURATION

The TOE is defined by its name and version number LDS EAC Java Applet in BAP configuration with AA v2.2.

The composite TOE includes:

- the integrated circuit, IC NXP Secure Smart Card Controllers P5CD081V1A or P5CD145V0A
- the Java Card Platform ID One Cosmo v7.0.1-n masked in one of the above ICs including Global Platform support and a cryptographic library,
- the LDS EAC Java Applet in BAP configuration with AA v2.2
- the associated guidance documentation.

The commercial version and internal version of the applet may be retrieved by following the procedure below (see AGD_OPE ed.2):

1. Select the applet
2. Perform BAC or BAP if BAC/BAP is supported
3. Send GET DATA command with the tag "DF66" to retrieve the commercial version of the applet (see GET DATA in AGD_OPE). The applet shall return: "DF66 0A 067007 02020100 000000"
4. Send GET DATA command with the tag "DF67" to retrieve the internal version of the applet (see GET DATA).
 - a. The applet shall return: "DF67 0E 30 0C 04040A00060D 04040F0F0F0E" if stub EAC package is loaded (BAP configuration).
5. Send GET DATA command with the tag "DF63" to retrieve the EAC configuration of the applet (see GET DATA).
 - a. The applet is configured in BAC if the BAC/BAP configuration byte indicates 001xxxxxb for BAP-1, 010xxxxxb for BAP-2, 011xxxxxb for BAP-3, and 100xxxxxb for BAP-4.

EVALUATION RESULTS

The product LDS EAC Java Applet in BAP configuration with AA v2.2 has been evaluated against the Security Target Polymnie Security Target BAP issue: 7.

All the assurance components required by the evaluation level EAL4 + ALC_DVS.2 have been assigned a "PASS" verdict. Consequently, the laboratory Applus LGAI Technological Center S.A. assigns the "**PASS**" **VERDICT** to the whole evaluation



due all the evaluator actions are satisfied for the evaluation level EAL4 + ALC_DVS.2, as defined by the Common Criteria version 3.1 revision 3 and the Common Methodology for Information Technology Security Evaluation version 3.1 revision 3.

COMMENTS & RECOMMENDATIONS FROM THE EVALUATION TEAM

Next, recommendations regarding the secure usage of the TOE are provided. These have been collected along the evaluation process and are detailed to be considered when using the product.

- The developer follows all the underlying platform security recommendations and contributes with additional countermeasures to enforce the security of the whole product. Therefore the LDS EAC Java Applet in BAP configuration with AA, Version 2.2 fulfils the requirements of CC version 3.1 with an evaluation assurance level EAL4 + ALC_DVS.2.

CERTIFIER RECOMMENDATIONS

Considering the obtained evidences during the instruction of the certification request of the product LDS EAC Java Applet in BAP configuration with AA v2.2, a positive resolution is proposed.

Additionally, the Certification Body wants to remark to the TOE's consuming organizations the following:

- Oberthur's Project Leader at Manilla's facilities plays a key role in the security procedures followed to generate the TOE. Project Leader at this facility assures by following the security procedures that the generated TOE reflects its implementation representation managed in the Configuration Management System.

GLOSSARY

| | |
|-----|------------------------------|
| AA | Active Authentication |
| BAC | Basic Access Control |
| CC | Common Criteria |
| CCN | Centro Criptológico Nacional |



| | |
|------|---|
| CNI | Centro Nacional de Inteligencia |
| DG | Data Group |
| EAL | Evaluation Assurance Level |
| ETR | Evaluation Technical Report |
| ICAO | International Civil Aviation Organization |
| IDL | ISO compliant Driving Licence |
| LDS | Logical Data structure |
| MRTD | Machine readable Travel Document |
| MRZ | Machine readable Zone |
| OC | Organismo de Certificación |
| ST | Security Target |
| TOE | Target Of Evaluation |

BIBLIOGRAPHY

The following standards and documents have been used for the evaluation of the product:

[CC_P1] Common Criteria for Information Technology Security Evaluation Part 1: Introduction and general model, Version 3.1, R3 Final, July 2009.

[CC_P2] Common Criteria for Information Technology Security Evaluation Part 2: Security functional components, Version 3.1, R3 Final, July 2009.

[CC_P3] Common Criteria for Information Technology Security Evaluation Part 3: Security assurance components, Version 3.1, R3 Final, July 2009.

[CEM] Common Methodology for Information Technology Security Evaluation: Version 3.1, R3 Final, July 2009.

[JILCOMP] Composite product evaluation for Smart Cards and similar devices version 1.2. Jan. 2012.

[CCCOMP] Composite product evaluation for Smartcards and similar devices Version 1.0. Sept. 2007.

[JILAAPS] Application of Attack Potential to Smartcards, Version 2.7. March 2009.

[PP-EAC] Common Criteria Protection Profile Machine Readable Travel Document with ICAO Application, Extended Access Control, version 1.10. BSI-CC-PP-0056. Version 1.10. March 2009.

[PP-BAC] Common Criteria Protection Profile Machine Readable Travel Document with "ICAO Application", Basic Access Control, BSI-PP-0055, Version 1.10, March 2009



[ICAO_P1] ICAO Doc 9303, Machine Readable Travel Documents, part 1 – Machine Readable Passports, Sixth Edition, 2006, International Civil Aviation Organization

[ISO18013-1] Information Technology - Personal Identification – ISO Compliant Driving Licence – Part 1: Physical characteristics and basic data set, ISO/IEC FDIS 18013-1:2005(E)

[ISO18013-2] Information Technology - Personal Identification — ISO Compliant Driving Licence — Part 2: Machine-readable technologies, ISO/IEC FDIS 18013-2:2007(E)

[ISO18013-3] Personal Identification — ISO Compliant Driving Licence — Part 3: Access control, authentication and integrity validation, ISO/IEC FDIS 18013-3:2008(E)

SECURITY TARGET

Along with the certification report, the complete security target for the evaluation is stored and protected in the Certification Body premises. This document is identified as:

- **Polymnie Security Target BAP issue:7 – Document id: FQR:110 5694**

The public version of this document constitutes the ST Lite. The ST Lite has also been evaluated for the needs of publication according to [CCDB-2006-04-004], and it is published along with this certification report in the Certification Body and CCRA websites. The ST Lite identifier is:

- **Polymnie Security Target BAP Ed. 2 – Document id: FQR 110 6343 Ed.2**