



Multi-interface Smart Card IC

Security Target
RC-SA08/1 and RC-SA08/2

Public Version

Version 1.51
No. A08-STP-E01-51

- FeliCa is a contactless IC card technology developed by Sony Corporation.
- FeliCa is a trademark of Sony Corporation.
- All names of companies and products contained herein are trademarks or registered trademarks of the respective companies.
- No part of this document may be copied, or reproduced in any form, without the prior consent of Sony Corporation.
- Information in this document is subject to change without notice.
- Sony Corporation assumes no liability for damages arising from, or in connection with, the use of this document.

Introduction

This document is the Security Target for CC evaluation of IC chip product "RC-SA08/1 and RC-SA08/2".

Contents

1	Introducing the Security Target	5
1.1	ST and TOE identification	5
1.2	Conformance claims.....	5
1.2.1	CC conformance claim	5
1.2.2	Package claim	6
1.2.3	PP claim	6
1.2.4	PP claim rationale.....	6
1.3	TOE overview	6
2	TOE description.....	8
2.1	Physical scope	8
2.2	Delivery.....	9
2.3	Logical scope.....	10
2.4	Lifecycle.....	10
2.5	Evaluated configurations	11
2.6	Evaluated derivative products.....	11
3	Security problem definition	13
3.1	Assets	13
3.2	Threats.....	13
3.3	Assumptions.....	14
3.4	Organisational security policies	14
4	Security objectives.....	16
4.1	TOE security objectives	16
4.2	TOE operational environment security objectives.....	17
4.3	Security objectives rationale	18
5	Extended components definitions	22
6	IT security requirements	23
6.1	TOE security functional requirements.....	23
6.1.1	SFRs defined in the Security Target.....	23
6.1.2	SFRs from the Protection Profile	25
6.2	TOE security assurance requirements.....	27
6.2.1	Refinements of the TOE Assurance Requirements	28
6.3	Security functional requirements rationale	29
6.4	Security assurance requirements rationale	32
7	Compatibility with the platform ST	34
7.1	Security environment	34
7.2	Security objectives.....	36
7.3	Security functional requirements.....	38
7.4	Security assurance requirement	40
8	TOE Summary Specification	41
8.1	TOE summary specification rationale	41
8.2	TOE architectural design summary.....	43
9	Glossary and references	45
9.1	Terms and definitions	45
9.2	Acronyms.....	46
9.3	Bibliography	46

1 Introducing the Security Target

This document is the Security Target for CC evaluation of IC chip product RC-SA08/1 and RC-SA08/2.

This Security Target is provided in accordance with "Common Criteria for Information Technology Security Evaluation" [CC].

For definitions of the terms, abbreviations, and literary references used in this document, see Chapter 9, "Glossary and references".

1.1 ST and TOE identification

This section provides the information necessary to identify and control this Security Target and its TOE, FeliCa Multi-interface Smart Card IC RC-SA08/1 and RC-SA08/2.

Table 1: ST identification

ST attribute	Value
Name	Security Target RC-SA08/1 and RC-SA08/2
Version	1.51
Reference	A08-STP-E01-51
Issue Date	June 2017

Table 2: TOE identification

TOE attribute	Value
Name	RC-SA08/1 and RC-SA08/2
Version	1.00
Product type	Multi-interface Smart Card IC

1.2 Conformance claims

This section describes the conformance claims.

1.2.1 CC conformance claim

The evaluation is based on the following:

- "Common Criteria for Information Technology Security Evaluation", Version 3.1 (composed of Parts1-3, [CC Part 1], [CC Part 2], and [CC Part 3])
- "Common Methodology for Information Technology Security Evaluation: Evaluation Methodology", Version 3.1 [CC CEM]

Security Target RC-SA08/1 and RC-SA08/2

This Security Target claims the following conformances:

- [CC Part 2] extended
- [CC Part 3] conformant

1.2.2 Package claim

The chosen level of assurance is:

- Evaluation Assurance Level 5 (EAL5) augmented with ALC_DVS.2, AVA_VAN.5 and ASE_TSS.2

1.2.3 PP claim

This Security Target and the TOE claim strict conformance to the following Protection Profile (PP):

- “Security IC Platform Protection Profile with Augmentation Packages”, Version 1.0 [BSI-PP-0084]

1.2.4 PP claim rationale

The TOE type defined in section 2.3 of this Security Target is an integrated circuit including software package, together with guidance manual. This is consistent with the TOE type defined in section 1.2.2 of [BSI-PP-0084]. This Security Target claims strict conformance to the Protection Profile.

1.3 TOE overview

The TOE is an integrated circuit with an embedded smartcard operating system. The operating system is the Sony FeliCa Operating System (referred to in this document as FeliCa OS) and the integrated circuit is the STMicroelectronics SAS (STM) chip ST31G480 [ST-HW].

The TOE manages several data sets, each having a different purpose, on a single TOE. The TOE has a file system consisting of Areas and FeliCa Services, which organise files in a tree structure (as shown in Figure 1). Multiple Service Providers can use an Area or a FeliCa Service. Access keys enable access to data, via the Areas and FeliCa Services. This prevents unauthorised access to the User Services of other Service Providers. By organising these keys in a specific manner, multiple Area and FeliCa Services can be authenticated simultaneously.

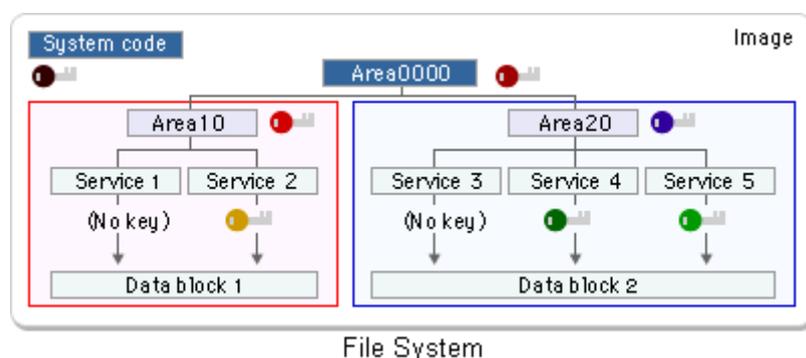


Figure 1: The FeliCa file system

The security measures of the TOE aim at protecting the access to the User Services (including associated user data), and to maintain the confidentiality and integrity of the user data. The User Services are

Security Target RC-SA08/1 and RC-SA08/2

defined by Service Providers. For example, a public transport Service Provider can incorporate the TOE into a ticketing system, to offer a ticket-payment User Service. A single TOE can be used by multiple Service Providers. A Service Provider can provide multiple User Services.

To set up the User Services and the access to those services, the Administrator (also known as a Personaliser) configures the TOE. This configuration work enables the TOE to offer various User Services, such as cash-purse and transport-payment solutions. After the TOE is personalised, the Users are allowed only to access the FeliCa Services defined by the Administrator.

The TOE has a contact interface and a contactless interface. All operations on the TOE are performed through either a contact card reader (CT_Term) or a contactless card reader (CL_Term). The TOE communicates with the CL_Term according to ISO/IEC 18092 (Passive Communication Mode 212/424kbps) [ISO 18092] or ISO/IEC 14443 (Type A/Type B), or communicates with the CT_Term according to ISO/IEC 7816 (T=0/T=1), by using the APDU formatted commands that wrap the FeliCa command.

The card reader and the TOE authenticate each other, and only then shall the TOE allow the card reader access, according to the access policy defined by the Administrator. After authentication the communication between the TOE and the card reader is encrypted.

The TOE has several self-protection mechanisms sufficient to satisfy all requirements for self-protection, non-bypassability, and domain separation as described by the CC supporting documents for the smartcard security evaluations [AAPS].

2 TOE description

This chapter describes the following aspects of the TOE:

- physical scope
- delivery
- logical scope
- lifecycle
- evaluated configurations
- evaluated derivative products

2.1 Physical scope

The TOE is an integrated circuit with an IC Dedicated Software and the Security IC Embedded Software. The Security IC Embedded Software is the FeliCa OS and the integrated circuit is the STM chip ST31G480.

The TOE is a part of the RC-SA08 Series product. In addition to the TOE, the RC-SA08 Series product contains the Java Card Software, which consists of the Java Card System and Java Applets.

The following figure illustrates the physical scope of the TOE, which is indicated in yellow, and the product, which is indicated in blue:

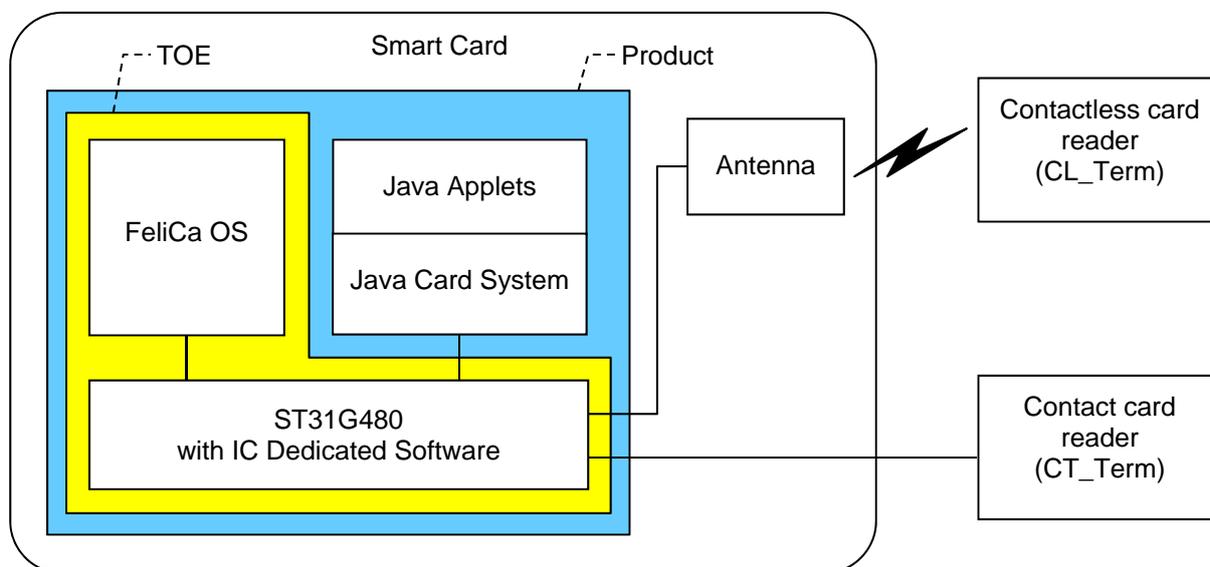


Figure 2: TOE physical scope

The components of the TOE are explained as follows:

- "FeliCa OS" constitutes the part of the TOE that is responsible for managing and providing access to the Areas and FeliCa Services.

Security Target RC-SA08/1 and RC-SA08/2

- "ST31G480 with IC Dedicated Software" is the hardware platform of the TOE, which provides a contact interface and a contactless interface. The CPU of the hardware platform "STM ST31G480" has a 32-bit architecture. The hardware platform includes ROM, RAM, Flash memory, the IC Dedicated Software and the cryptographic co-processor which supports AES and DES¹ operation. The hardware platform also includes security detectors, sensors and circuitry to protect the TOE.

The contact interface and the contactless interface enable the exchange of FeliCa commands, which are processed by the FeliCa OS, and APDU commands, which are processed by the Java Card System. The antenna, which is out of scope of the TOE, provides the RF interface on the smart card.

The Java Card System and Java Applets are out of scope of the TOE. The FeliCa OS is protected from the non-TOE Software by using the Library Protection Unit function (LPU) of the hardware.

All components of the TOE including guidance manuals are listed in the following section.

2.2 Delivery

The TOE delivery items are listed in the following table:

Table 3: TOE delivery items

Delivery item type	Identifier	Version	Medium
Hardware	STM ST31G480 Smartcard IC – Hardware	42 48	Smartcard integrated circuit
Software	STM ST31G480 Smartcard IC – IC Dedicated Software	02 01 00 04	Embedded in hardware
	FeliCa OS v5.0	3E 03	Embedded in hardware
Manuals	FeliCa Card User's Manual	1.02	Document
	RC-SA08 Inspection and IDm Writing Procedure	0.9	Document
	Product Acceptance Procedure	1.0	Document
	Cross Access Functional Specifications	1.0	Document
	Security Reference Manual – Group Key Generation (AES 128bit)	1.21	Document
	Security Reference Manual – Mutual Authentication & Secure Communication (AES 128bit)	1.21	Document
	Security Reference Manual – Package Generation (AES 128bit)	1.21	Document
	Security Reference Manual – Changing Key Package Generation (AES 128bit)	1.21	Document
	FeliCa Card AES Encryption Mechanism Transition Guide	1.0	Document

¹ RC-SA08 does not implement any Security Functional Requirement using DES operation. Therefore, the functionality implemented by DES is not part of the evaluation.

2.3 Logical scope

The TOE offers the following features:

- it can receive FeliCa commands from the contactless interface (Type F)
- it can receive APDU commands from the contact interface or the contactless interface (Type A/B)
- it can forward APDU commands to the Java Card System
- it enables the set-up and maintenance of FeliCa Services by Service Providers
- it enables the use of FeliCa Services (e.g., decrement, cash-back)

The TOE offers the following security features:

- authentication of users (AES and DES²)
- controlled access to data stored internally in the TOE
- privacy protection against Card holder behaviour tracking
- secure communication with the smartcard Reader/Writer (AES and DES²)
- protection of integrity of data stored internally in the TOE
- anti-tearing and rollback
- protection against excess environment conditions
- protection against information leakage
- protection against probing and alteration
- isolation from untrusted software which is embedded in the hardware.

The security features are provided partly by the underlying hardware and partly by the FeliCa Operating System.

2.4 Lifecycle

The lifecycle of the TOE is explained using the smartcard lifecycle as defined in "Security IC Platform Protection Profile with Augmentation Packages" [BSI-PP-0084], which includes the phases listed in the following table:

Table 4: Phases of the TOE lifecycle

Phase	Description
Phase 1	IC embedded software development
Phase 2	IC development
Phase 3	IC manufacturing
Phase 4	IC packaging
Phase 5	Composite product integration

² RC-SA08 does not implement any Security Functional Requirement using DES operation. Therefore, the functionality implemented by DES is not part of the evaluation.

Security Target RC-SA08/1 and RC-SA08/2

Phase	Description
Phase 6	Personalisation
Phase 7	Operational usage

The TOE is delivered at the end of **Phase 4**.

An explanation of each phase of the TOE lifecycle follows:

Phase 1: The RC-SA08 Series product contains the Security IC Embedded Software and the Java Card Software, which are developed in Phase 1 by Sony.

At the end of this phase, Sony delivers the Security IC Embedded Software, the Java Card Software and its pre-personalisation data to STM.

Phase 2 and Phase 3: The IC is developed and manufactured in Phase 2 and Phase 3 by STM. In these phases the Security IC Embedded Software, the Java Card Software and its pre-personalisation data are injected.

Phase 4: STM delivers the RC-SA08 Series product to Sony.

At the end of this phase, RC-SA08 Series product, which includes the TOE and the Java Card Software, can be delivered from Sony to the Smartcard Manufacturer.

Sony views the Smartcard Manufacturer and the Administrator jointly as the Administrator role.

Phase 5: The Smartcard Manufacturer integrates the TOE into its smartcard product and then delivers that product to the Administrator.

Phase 6: The Administrator performs the personalisation.

Phase 7: The product is delivered to the Card holder for operational use.

2.5 Evaluated configurations

The TOE provides the configuration that allows the system administrator to choose an option of privacy protection mechanism, which provides random ID. The administrator may use either unique ID or random ID during the anti-collision sequence between the TOE and a card reader (either CL_Term or CT_Term). Unique ID may be used for tracking of Card holder, but random ID can prevent Card holder from being tracked.

The TOE is evaluated in both with or without privacy protection mechanism.

2.6 Evaluated derivative products

The TOE comprises the group of derivatives, which can be clearly identified by different product type names.

The product type names which are subject of the evaluation are listed in the following table:

Table 5: Product name comprising the group of derivatives

Product name	IC Code	Specifications
RC-SA08/1	3E 03	68pF input capacity
RC-SA08/2	3E 03	20pF input capacity

Security Target RC-SA08/1 and RC-SA08/2

IC Code listed in the above table is the identifier to discriminate the TOE derivatives. A number of TOE derivatives are supported in this Security Target and all product type names listed in the table above are subject of the evaluation.

3 Security problem definition

The statement of the security problem describes the assets that the TOE is expected to protect and the security measures that are to be enforced by the TOE or its operational environment.

To this end, the security problem definition (this chapter) identifies and lists the following:

- primary and secondary assets
- the threats to be countered by the TOE
- the assumptions about the TOE environment
- the organisational security policies with which the TOE is designed to comply.

3.1 Assets

The assets that the TOE is expected to protect are as follows:

- the primary asset of the TOE is the sensitive user data (i.e., data from Users and Service Providers) loaded into the volatile and non-volatile memory
- all assets employed to protect the primary assets are secondary assets (such as cryptographic keys, the operating system code, data, and so on).

In addition to the above assets, since this Security Target claims conformance to “Security IC Platform Protection Profile with Augmentation Packages” [BSI-PP-0084], the assets defined in section 3.1 of the Protection Profile are also expected to be protected.

3.2 Threats

The threats are directed against the assets and the security functions of the TOE. Since this Security Target claims conformance to “Security IC Platform Protection Profile with Augmentation Packages” [BSI-PP-0084], the threats defined in section 3.2 of the Protection Profile are applied for this Security Target. The following table shows the threats of the Protection Profile.

Table 6: Threats defined in the Protection Profile

Threats	Titles
T.Phys-Manipulation	Physical Manipulation
T.Phys-Probing	Physical Probing
T.Malfunction	Malfunction due to Environmental Stress
T.Leak-Inherent	Inherent Information Leakage
T.Leak-Forced	Forced Information Leakage
T.Abuse-Func	Abuse of Functionality
T.RND	Deficiency of Random Numbers

3.3 Assumptions

The customer is responsible for the secure administration of the TOE. It is assumed that security procedures are used between delivery of the TOE by the TOE manufacturer and delivery to the customer, to maintain the confidentiality and integrity of the TOE and its manufacturing and test data. So the following assumption defined in section 3.4 of the Protection Profile [BSI-PP-0084] is applied for this Security Target.

Table 7: Assumptions defined in the Protection Profile

Assumption	Title
A.Process-Sec-IC	Protection during Packaging, Finishing and Personalisation

In addition to the above assumption, the Protection Profile defines the assumption A.Resp-Appl which is intended to the developer of the Security IC Embedded Software. This assumption is re-assigned to the organisational security policy P.Resp-Appl because the TOE does include the Security IC Embedded Software which fulfils this assumption.

3.4 Organisational security policies

To record the security problem definition in terms of policies, we state what protection the TOE shall afford to the user, as follows:

P.Confidentiality **The TOE shall provide the means to protect the confidentiality of the stored assets.**

The TOE shall have some security measures that can protect the stored user data from unauthorised disclosure. We do not expect the TOE to enforce these security measures on any or all user data, but those measures shall be available when the user decides that they shall be used for some of the user data.

P.Integrity **The TOE shall provide the means to protect the integrity of the stored assets.**

The integrity of the stored assets shall be protected during operation in a hostile environment. The possibility of attacks trying to alter specific data cannot be discounted but, for a contactless smart card, there are other considerations that already make the integrity a prime concern, such as the very real possibility of power cut-off at any point during processing. To ensure the integrity, the TOE shall have some security measures that can protect the stored user data from unauthorised modification and destruction.

P.TransferSecret **The TOE shall provide the means to protect the confidentiality of assets during transfer from the outside of TOE.**

At the user's discretion, user data that is sent or received through the communication channel needs protection from unauthorised disclosure. The TOE shall provide the capabilities to provide such measures.

P.TransferIntegrity **The TOE shall provide the means to protect the integrity of assets during transfer from the outside of TOE.**

The integrity of the messages on the communication channel shall take into account both the possibility of benign interference and malicious interference in various forms, such as: RF noise, spikes in the field, short removals of the field, ghost transmissions, replay, and injection of data

Security Target RC-SA08/1 and RC-SA08/2

into the channel. The TOE shall provide the means to ensure the integrity of user data transferred.

P.Configure The TOE shall provide the means to configure the level of protection for each of the assets.

The TOE is a tool to be used by the user in a system that shall implement specific business rules. The TOE may not assume the level of protection required for any asset. The TOE shall provide the means for the level of protection to be specified explicitly by the user for each asset.

P.Keys The keys generated for TOE use shall be secure. The keys for use by the TOE shall be generated and handled in a secure manner.

Some keys for TOE use are generated outside the TOE, by the supporting system in a controlled environment. This system shall check that all such keys are suitably secure by, for example, weeding out weak keys. The secure keys are then loaded into the TOE. The process of key generation and management shall be suitably protected and shall occur in a controlled environment.

P.Untrackability The TOE shall provide the means to prevent the tracking of the Card holder through the TOE-specific information

At the Service Provider's discretion, the Card holder is protected from being tracked with the TOE-specific information by the unauthorised user. The TOE shall provide the capabilities to provide such measures. Typically the TOE-specific information may be unique ID of the TOE.

In addition to the above organisational security policies, since this Security Target claims conformance to "Security IC Platform Protection Profile with Augmentation Packages" [BSI-PP-0084], the organisational security policies defined in section 3.3 of the Protection Profile are applied for this Security Target. The following table shows the organisational security policies of the Protection Profile:

Table 8: Organisational security policies defined in the Protection Profile

Policy	Title
P.Process-TOE	Protection during TOE Development and Production

The TOE includes Security IC Embedded Software which fulfils the assumption A.Resp-Appl defined in [BSI-PP-0084] and thereby this assumption is re-assigned to the following organisational security policy for this Security Target.

P.Resp-Appl Treatment of user data of the Composite TOE

The Security IC Embedded Software of the TOE shall treat user data **of the Composite TOE** according to the assumption A.Resp-Appl defined in [BSI-PP-0084].

4 Security objectives

This chapter describes the security objectives for the TOE and the TOE environment in response to the security needs identified in Chapter 3, "Security problem definition".

Security objectives for the TOE are to be satisfied by technical countermeasures implemented by the TOE. Security objectives for the environment are to be satisfied either by technical measures implemented by the IT environment, or by non-IT measures.

4.1 TOE security objectives

The following TOE Security Objectives have been identified for the TOE, as a result of the discussion of the Security Problem Definition. Each objective is stated in bold type font. It is followed by an application note, in regular font, which provides additional information and interpretation.

O.AC The TOE shall provide a configurable access control system to prevent unauthorised access to stored user data.

The TOE shall provide its users with the means of controlling and limiting access to the objects and resources they own or are responsible for in a configurable and deterministic manner. This objective combines all aspects of authentication and access control.

O.SC The TOE shall provide configurable secure channel mechanisms for the protection of user data when transferred between the TOE and an outside entity.

The TOE receives and sends user data over a wireless interface, which is considered easy to tap and alter. Therefore, the TOE shall provide mechanisms that allow the TOE and an external entity to communicate with each other in a secure manner. The secure channel mechanisms shall include protection of the confidentiality and integrity of the transferred user data.

O.Integrity The TOE shall provide mechanisms for detecting integrity errors in stored user data.

The TOE operates in a highly unstable and hostile environment. All precautions shall be taken to ensure that all user data stored in the TOE (and any associated security data) are always in a consistent and secure state.

O.Untrackability The TOE shall provide configurable privacy protection mechanism against Card holder tracking.

The TOE shall provide the means to protect the Card holder from being tracked. This shall be done by providing an option that protects the TOE-specific information from the Card holder tracking by any unauthorised third party.

In addition to the above security objectives, since this Security Target claims conformance to "Security IC Platform Protection Profile with Augmentation Packages" [BSI-PP-0084], the security objectives defined in section 4.1 of the Protection Profile are valid for this Security Target. The following table shows the security objectives of the Protection Profile:

Table 9: Security objectives defined in the Protection Profile

Security objectives	Titles
O.Leak-Inherent	Protection against Inherent Information Leakage
O.Phys-Probing	Protection against Physical Probing
O.Malfunction	Protection against Malfunctions
O.Phys-Manipulation	Protection against Physical Manipulation
O.Leak-Forced	Protection against Forced Information Leakage
O.Abuse-Func	Protection against Abuse of Functionality
O.Identification	TOE Identification
O.RND	Random Numbers

4.2 TOE operational environment security objectives

This section identifies the IT security objectives that are to be satisfied by the imposing of technical or procedural requirements on the TOE operational environment. These security objectives are assumed by the Security Target to be permanently in place in the TOE environment. They are included as necessary to support the TOE security objectives in addressing the security problem defined in Chapter 3, "Security problem definition". Each objective is stated in bold type font; it is followed by an application note, in regular font, which supplies additional information and interpretation.

OE.Keys The handling of the keys outside the TOE shall be performed in accordance to the specified policies.

Specific keys for use by the TOE are generated externally (that is, beyond control of the TOE). The generation and control of the keys shall be performed in strict compliance to the specific policies set for such operations.

OE.Keys is defined to fulfill the OSP P.Keys defined in this Security Target, therefore it neither mitigates a threat meant to be addressed by security objectives for the TOE in the PP [BSI-PP-0084], nor fulfills an OSP meant to be addressed by security objectives for the TOE in the PP [BSI-PP-0084].

In addition to the above environment objectives, since this Security Target claims conformance to "Security IC Platform Protection Profile with Augmentation Packages" [BSI-PP-0084], the objectives defined in section 4.3 of the Protection Profile are valid for this Security Target. The following table shows the environment objectives of the Protection Profile:

Table 10: Security objectives for the environment defined in the Protection Profile

Security objectives	Titles
OE.Process-Sec-IC	Protection during composite product manufacturing

The environment objective OE.Resp-Appl which is defined in the Protection Profile is re-assigned to the security objectives O.AC, O.SC and O.Integrity because the TOE does include the Security IC Embedded Software which fulfils this environment objective.

4.3 Security objectives rationale

This section demonstrates the suitability of the choice of security objectives and that the stated security objectives counter all identified threats, policies, or assumptions.

The following table maps the security objectives to the security problem, which is defined by the relevant threats, policies, and assumptions. This illustrates that each threat, policy, or assumption is covered by at least one security objective.

Table 11: Policies versus Security Objectives

Policy	Policy text	Objective	Objective text
P.Confidentiality	The TOE shall provide the means to protect the confidentiality of the stored assets.	O.AC	The TOE shall provide a configurable access control mechanism to prevent unauthorised access to stored user data.
P.Integrity	The TOE shall provide the means to protect the integrity of the stored assets.	O.AC	The TOE shall provide an access control mechanism to protect integrity of the stored user data from unauthorised access.
		O.Integrity	The TOE shall provide mechanisms for detecting integrity errors in stored user data.
P.TransferSecret	The TOE shall provide the means to protect the confidentiality of assets during transfer to and from the TOE.	O.SC	The TOE shall provide configurable secure channel mechanisms for the protection of user data transferred between the TOE and an external entity.
P.TransferIntegrity	The TOE shall provide the means to protect the integrity of assets during transfer to and from the TOE.	O.SC	The TOE shall provide a configurable secure channel mechanism for the protection of user data transferred between the TOE and an external entity.
P.Configure	The TOE shall provide the means to configure the level of protection for each of the assets.	O.AC	The TOE shall provide a configurable access control mechanism to prevent unauthorised access to stored user data.
P.Keys	The keys generated for the use of the TOE shall be secure. The keys for the use of the TOE shall be generated and handled in a secure manner.	OE.Keys	The handling of the keys outside the TOE shall be performed in accordance with the specified policies.
P.Untrackability	The TOE shall provide the means to prevent the tracking of Card	O.Untrackability	The TOE shall provide a configurable privacy protection mechanism against user tracking

Security Target RC-SA08/1 and RC-SA08/2

Policy	Policy text	Objective	Objective text
	holder through the TOE specific information.	O.AC	The TOE shall configurable access control mechanism to prevent unauthorised access to the TOE-specific information.

The following explanation shows that the chosen security objectives are sufficient and suitable to address the identified threats, assumptions, and policies.

The policies for the TOE call for protection of user data when stored in the TOE and when in transit between the TOE and an external security product. Also, the policies require that the system used for protection of the assets when stored within the TOE be flexible and configurable. These policies are upheld by defining the following two objectives for the TOE: O.AC and O.SC. The O.AC objective makes sure that the TOE implements an access control system that protects the stored user data from illegal access (as required by the P.Confidentiality policy), while providing the capability to configure the access rules and operations for the authorised users (as required by the P.Configure policy). The O.SC objective provides a secure channel that shall be established between the TOE and an external entity; this secure channel shall protect all transmitted user data from disclosure (as required by P.TransferSecret) and from integrity errors, whether as a result of an attack or environmental conditions (such as loss of power), as required by P.TransferIntegrity.

The policy P.Integrity requires that user data shall be protected from integrity errors when stored in the TOE. It is upheld by two objectives for the TOE: O.AC and O.Integrity. The O.AC objective provides the access control system, which allows only authorised users to access stored user data and protects the integrity of stored user data from illegal access. The O.Integrity objective provides an integrity-monitoring mechanism to detect errors in stored user data.

The policy P.Untrackability requires that the user shall be protected from tracking if the TOE specific information is compromised. Tracking can be performed with identification (ID) number stored in the TOE. This policy is upheld by two objectives for the TOE: O.Untrackability and O.AC, which provide the means to protect the disclosure of TOE specific information (ID number) that leads to user tracking by unauthorised third party.

The policy for the environment that requires secure generation and handling of keys, P.Keys, is similarly directly translated into the objective for the environment OE.Keys for the secure handling of keys and generation of secure keys.

The following table maps the security problem to the security objectives defined in the Protection Profile [BSI-PP-0084]. The section 4.4 of the Protection Profile gives the rationale of showing that the security objectives are sufficient and suitable to address the threats, assumptions, and policies.

Table 12: Assumptions, Threats or Policies versus Security Objectives defined in the PP

Assumption, threat or policy	Objective	Notes
P.Resp-Appl (re-assigned from A.Resp-Appl)	O.AC O.SC O.Integrity (re-assigned from OE.Resp-Appl)	Phase 1 See discussion below
P.Process-TOE	O.Identification	Phase 2 – 4
A.Process-Sec-IC	OE.Process-Sec-IC	Phase 5 – 6
T.Leak-Inherent	O.Leak-Inherent	
T.Phys-Probing	O.Phys-Probing	
T.Malfunction	O.Malfunction	

Security Target RC-SA08/1 and RC-SA08/2

Assumption, threat or policy	Objective	Notes
T.Phys-Manipulation	O.Phys-Manipulation	
T.Leak-Forced	O.Leak-Forced	
T.Abuse-Func	O.Abuse-Func	
T.RND	O.RND	

The following explanation shows the reason why the re-assigned policy P.Resp-Appl is sufficiently addressed by O.AC, O.SC and O.Integrity respectively.

The policy P.Resp-Appl requires that the Security IC Embedded Software shall treat user data according to the assumption A.Resp-Appl defined in [BSI-PP-0084]. This policy is directly covered by the security objectives O.AC, O.SC and O.Integrity which require the Security IC Embedded Software to treat the security relevant user data as required by the security needs. In the Protection Profile, the Phase 1 is identified as the operational environment. However this TOE includes the Security IC Embedded Software development in the scope. The Security IC Embedded Software implements measures for secure treatment of user data through the security objectives O.AC, O.SC and O.Integrity, and therefore the security objective for the environment is fulfilled.

The following table maps all security objectives defined in this Security Target and Protection Profile to the relevant threats, policies, and assumptions. This illustrates that each security objective covers at least one threat, policy or assumption.

Table 13: Security Objectives versus Assumptions, Threats or Policies

Objectives	Assumptions, threats or policies
O.AC	P.Confidentiality P.Integrity P.Configure P.Resp-Appl (re-assigned from A.Resp-Appl)
O.SC	P.TransferSecret P.TransferIntegrity P.Resp-Appl (re-assigned from A.Resp-Appl)
O.Integrity	P.Integrity P.Resp-Appl (re-assigned from A.Resp-Appl)
O.Untrackability	P.Untrackability
OE.Keys	P.Keys
O.Leak-Inherent	T.Leak-Inherent
O.Phys-Probing	T.Phys-Probing
O.Malfunction	T.Malfunction
O.Phys-Manipulation	T.Phys-Manipulation
O.Leak-Forced	T.Leak-Forced
O.Abuse-Func	T.Abuse-Func
O.Identification	P.Process-TOE
O.RND	T.RND

Security Target RC-SA08/1 and RC-SA08/2

Objectives

OE.Process-Sec-IC

Assumptions, threats or policiesA.Process-Sec-IC

5 Extended components definitions

This Security Target does not define extended components in addition to the components defined in the Protection Profile [BSI-PP-0084].

Chapter 5 of the Protection Profile [BSI-PP-0084] defines extended SFRs listed below, which are included in this Security Target.

- FCS_RNG.1 Generation of random numbers
- FMT_LIM.1 Limited capabilities
- FMT_LIM.2 Limited availability
- FAU_SAS.1 Audit storage
- FDP_SDC.1 Stored data confidentiality

6 IT security requirements

IT security requirements include the following:

- TOE security functional requirements (SFRs)
That is, requirements for security functions such as information flow control, identification and authentication.
- TOE security assurance requirements (SARs)
Provide grounds for confidence that the TOE meets its security objectives (such as configuration management, testing, vulnerability assessment.)
- This chapter discusses these requirements in detail. It also explains the rationales behind them, as follows:
 - Security functional requirements rationale
 - Security assurance requirements rationale

6.1 TOE security functional requirements

The TOE Security Objectives result in a set of Security Functional Requirements (SFRs).

The following section 5.1.1 and 5.1.2 separately describe the SFRs defined in this Security Target and Protection Profile [BSI-PP-0084].

About the notation used for Security Functional Requirements (SFRs):

- The refinement operation is used in many cases, to make the requirements easier to read and understand. All these cases are indicated and explained in footnotes.
- Selections appear in ***Italic bold*** font.
- Assignments appear in **Tahoma bold** font.

6.1.1 SFRs defined in the Security Target

This section describes the SFRs which are defined in the Security Target. All of the SFRs described in this section are taken from [CC Part2].

FMT_SMR.1 Security roles

FMT_SMR.1.1 The TSF shall maintain the roles **User and Administrator**.

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

FIA_UID.1 Timing of identification

FIA_UID.1.1 The TSF shall allow **Polling, Requests, Public_read, Public_write, Echo Back, Reset Mode** on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

FIA_UAU.1 Timing of authentication

FIA_UAU.1.1 The TSF shall allow **Polling, Requests, Public_read, Public_write, Echo Back, Reset Mode** on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

FIA_UAU.4 Single-use authentication mechanisms

FIA_UAU.4.1 The TSF shall prevent reuse of authentication data related to **all authentication mechanisms**.

FDP_ACC.1 Subset access control

FDP_ACC.1.1 The TSF shall enforce the **Service Access Policy** on the following:

- **Subjects:**
 - **User**
 - **Administrator**
- **Objects: Files**
- **Operations:**
 - **Authentication**
 - **Read**
 - **Write**
 - **Reset Mode**

FDP_ACF.1 Security attribute based access control

FDP_ACF.1.1 The TSF shall enforce the **Service Access Policy** to objects based on the following:

- **Subjects:**
 - **User with security attribute authentication**
 - **Administrator with security attribute authentication**
- **Objects: Files with security attributes ACL**

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

- **A Subject can do this operation on an Object when: the Subject is successfully authenticated, and the operation is listed in the Object's ACL.**

FDP_ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **none**.

FDP_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules:

- **no additional explicit rules.**

FMT_MOF.1 Management of security functions behaviour

FMT_MOF.1.1 The TSF shall restrict the ability to **enable, disable** the functions **random ID function** to **Administrator**.

FMT_MSA.1 Management of security attributes

FMT_MSA.1.1 The TSF shall enforce the **Service Access Policy** to restrict the ability to **perform any operation** on the security attributes **authentication and ACL to Administrator**.

FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions: **management of security attributes, management of random ID function**.

FPR_UNL.1 Unlinkability

FPR_UNL.1.1 The TSF shall ensure that **unauthorised third parties** are unable to determine whether **any operation of the TOE were caused by the same Card holder**³.

FTP_ITC.1 Inter-TSF trusted channel

FTP_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP_ITC.1.2 The TSF shall permit **another trusted IT product** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for **no functions**.

6.1.2 SFRs from the Protection Profile

This section describes the SFRs which are directly taken from the Protection Profile [BSI-PP-0084]. All assignment and selection operations on these SFRs are completely specified in the Protection Profile except the following SFRs.

- FAU_SAS Audit storage
- FDP_SDI Stored data integrity monitoring and action
- FDP_SDC Stored data confidentiality
- FCS_RNG Random number generation

FRU_FLT.2 Limited fault tolerance

FRU_FLT.2.1 The TSF shall ensure the operation of all the TOE's capabilities when the following failures occur: **exposure to operating conditions which are not detected according to the requirement Failure with preservation of secure state (FPT_FLS.1)**.

Refinement: The term "failure" above means "circumstances". The TOE prevents failures for the "circumstances" defined above.

³ Refinement operation is done. In this Security Target, "user" is consistently used as the term of representing User and Administrator. To state the requirement accurately without misunderstanding, the term "user" is replaced by "Card holder"

FPT_FLS.1 Failure with preservation of secure state

FPT_FLS.1.1 The TSF shall preserve a secure state when the following types of failures occur: **exposure to operating conditions which may not be tolerated according to the requirement Limited fault tolerance (FRU_FLT.2) and where therefore a malfunction could occur.**

Refinement: The term “failure” above also covers “circumstances”. The TOE prevents failures for the “circumstances” defined above.

FMT_LIM.1 Limited capabilities

FMT_LIM.1.1 The TSF shall be designed and implemented in a manner that limits their capabilities so that in conjunction with “Limited availability (FMT_LIM.2)” the following policy is enforced: **Deploying Test Features after TOE Delivery does not allow user data of the Composite TOE to be disclosed or manipulated, TSF data to be disclosed or manipulated, software to be reconstructed and no substantial information about construction of TSF to be gathered which may enable other attacks.**

FMT_LIM.2 Limited availability

FMT_LIM.2.1 The TSF shall be designed and implemented in a manner that limits their availability so that in conjunction with “Limited capabilities (FMT_LIM.1)” the following policy is enforced: **Deploying Test Features after TOE Delivery does not allow user data of the Composite TOE to be disclosed or manipulated, TSF data to be disclosed or manipulated, software to be reconstructed and no substantial information about construction of TSF to be gathered which may enable other attacks.**

FAU_SAS.1 Audit storage

FAU_SAS.1.1 The TSF shall provide **the test process before TOE Delivery** with the capability to store **the Initialisation Data and/or Pre-personalisation Data** in the **Flash memory**.

FDP_SDI.2 Stored data integrity monitoring and action

FDP_SDI.2.1 The TSF shall monitor user data stored in containers controlled by the TSF for **bit corruption** on all objects, based on the following attributes: **data integrity checksum**.

FDP_SDI.2.2 Upon detection of a data integrity error, the TSF shall **return an error code**.

FDP_SDC.1 Stored data confidentiality

FDP_SDC.1.1 The TSF shall ensure the confidentiality of the information of the user data while it is stored in **all the memory areas where it can be stored**.

FPT_PHP.3 Resistance to physical attack

FPT_PHP.3.1 The TSF shall resist **physical manipulation and physical probing** to the **TSF** by responding automatically such that the SFRs are always enforced.

Refinement: The TSF will implement appropriate mechanisms to continuously counter physical manipulation and physical probing. Due to the nature of these attacks (especially manipulation) the TSF can by no means detect attacks on all of its elements. Therefore, permanent protection against these attacks is required ensuring that security functional requirements are enforced. Hence, “automatic response” means here (i) assuming that there might be an attack at any time and (ii) countermeasures are provided at any time.

Security Target RC-SA08/1 and RC-SA08/2

FDP_ITT.1 Basic internal transfer protection

FDP_ITT.1.1 The TSF shall enforce the **Data Processing Policy** to prevent the **disclosure** of user data when it is transmitted between physically-separated parts of the TOE.

Refinement: The different memories, the CPU and other functional units of the TOE (e.g. a cryptographic co-processor) are seen as physically-separated parts of the TOE.

FDP_IFC.1 Subset information flow control

FDP_IFC.1.1 The TSF shall enforce the **Data Processing Policy** on **all confidential data when they are processed or transferred by the TOE or by the Security IC Embedded Software**.

FPT_ITT.1 Basic internal TSF data transfer protection

FPT_ITT.1.1 The TSF shall protect TSF data from **disclosure** when it is transmitted between separate parts of the TOE.

Refinement: The different memories, the CPU and other functional units of the TOE (e.g. a cryptographic co-processor) are seen as separated parts of the TOE.

FCS_RNG.1 Random number generation

FCS_RNG.1.1 The TSF shall provide a **hybrid deterministic** random number generator that implements **total failure test of the random source**.

FCS_RNG.1.2 The TSF shall provide **octets of bits** that meet the **NIST test suite [SP800-22]**.

6.2 TOE security assurance requirements

According to application note 22 of [BSI-PP-0084], the Protection Profile allows to add higher hierarchical components. This Security Target claims conformance to the Protection Profile. The differences in the SARs between the Protection Profile and the Security Target are identified in the following table.

Table 15: TOE SARs versus SARs chosen in Protection Profile

TOE SARs	SARs chosen in PP	Level difference
ADV_ARC.1	ADV_ARC.1	None
ADV_FSP.5	ADV_FSP.4	Higher hierarchical component
ADV_IMP.1	ADV_IMP.1	None
ADV_INT.2		Higher hierarchical component
ADV_TDS.4	ADV_TDS.3	Higher hierarchical component
AGD_OPE.1	AGD_OPE.1	None
AGD_PRE.1	AGD_PRE.1	None
ALC_CMC.4	ALC_CMC.4	None
ALC_CMS.5	ALC_CMS.4	Higher hierarchical component
ALC_DEL.1	ALC_DEL.1	None

Security Target RC-SA08/1 and RC-SA08/2

TOE SARs	SARs chosen in PP	Level difference
ALC_DVS.2	ALC_DVS.2	None
ALC_LCD.1	ALC_LCD.1	None
ALC_TAT.2	ALC_TAT.1	Higher hierarchical component
ASE_CCL.1	ASE_CCL.1	None
ASE_ECD.1	ASE_ECD.1	None
ASE_INT.1	ASE_INT.1	None
ASE_OBJ.2	ASE_OBJ.2	None
ASE_REQ.2	ASE_REQ.2	None
ASE_SPD.1	ASE_SPD.1	None
ASE_TSS.2	ASE_TSS.1	Higher hierarchical component
ATE_COV.2	ATE_COV.2	None
ATE_DPT.3	ATE_DPT.2	Higher hierarchical component
ATE_FUN.1	ATE_FUN.1	None
ATE_IND.2	ATE_IND.2	None
AVA_VAN.5	AVA_VAN.5	None

6.2.1 Refinements of the TOE Assurance Requirements

The Protection Profile defines the refinements for some SARs in section 6.2.1 of [BSI-PP-0084]. This Security Target selects the higher level assurance components compared to the Protection Profile. The following table shows the SARs that have the refinements in the Protection Profile and provides the overview of analysis results of whether the refinements are still applicable to higher hierarchical component.

Table 16: Applicability analysis of refinement of assurance requirements

TOE SARs	SARs chosen in PP	Level difference	Refinement applicability
ADV_ARC.1	ADV_ARC.1	None	still applicable
ADV_FSP.5	ADV_FSP.4	Higher hierarchical component	still applicable
ADV_IMP.1	ADV_IMP.1	None	still applicable
AGD_OPE.1	AGD_OPE.1	None	still applicable
AGD_PRE.1	AGD_PRE.1	None	still applicable
ALC_CMC.4	ALC_CMC.4	None	still applicable
ALC_CMS.5	ALC_CMS.4	Higher hierarchical component	still applicable
ALC_DEL.1	ALC_DEL.1	None	still applicable
ALC_DVS.2	ALC_DVS.2	None	still applicable
ATE_COV.2	ATE_COV.2	None	still applicable

Security Target RC-SA08/1 and RC-SA08/2

TOE SARs	SARs chosen in PP	Level difference	Refinement applicability
AVA_VAN.5	AVA_VAN.5	None	still applicable

The following two refinements from the Protection Profile are analysed here in the Security Target, as the higher hierarchical components are selected.

- Refinement regarding functional specification (ADV_FSP)

The refinement is still applicable to higher assurance component ADV_FSP.5. The refinement of the Protection Profile is performed only to provide a more clear explanation about what to be described in functional specification and show no necessity of describing test functions of the IC Dedicated Test Software. ADV_FSP.5 requires semi-formal functional specification with additional error messages which do not result from an invocation of a TSFI. Since ADV_FSP.5 has influence only on the formality of description and the scope of error messages, the refinements remains unaffected and still applicable.
- Refinement regarding CM scope (ALC_CMS)

The refinement is still applicable to higher assurance component ALC_CMS.5. The refinement of the Protection Profile is performed only to provide a more clear explanation about the scope of the configuration items. ALC_CMS.5 requires to add the development tools and related information into the scope of configuration items. Since ALC_CMS.5 only enlarges the scope of configuration items, the refinement remains unaffected and still applicable.

6.3 Security functional requirements rationale

The following table presents both the rationale for choosing specific Security Functional Requirements (SFRs) and how those requirements correspond to the specific Security Objectives:

Table 17: TOE Security Functional Requirements versus Security Objectives

Objective	TOE Security Functional Requirements
O.AC	<ul style="list-style-type: none"> - FMT_SMR.1 "Security roles" - FIA_UID.1 "Timing of identification" - FIA_UAU.1 "Timing of authentication" - FIA_UAU.4 "Single-use authentication mechanisms" - FDP_ACC.1 "Subset access control" - FDP_ACF.1 "Security attribute based access control" - FMT_MSA.1 "Management of security attributes" - FMT_SMF.1 "Specification of Management Functions"
O.SC	<ul style="list-style-type: none"> - FTP_ITC.1 "Inter-TSF trusted channel"
O.Integrity	<ul style="list-style-type: none"> - FDP_SDI.2 "Stored data integrity monitoring and action"
O.Untrackability	<ul style="list-style-type: none"> - FMT_MOF.1 "Management of security functions behavior" - FMT_SMR.1 "Security roles" - FMT_SMF.1 "Specification of Management Functions" - FPR_UNL.1 "Unlinkability"

The objective O.AC is achieved through inclusion of the SFRs FDP_ACC.1 and FDP_ACF.1, which together specify the access control policy. The operation of the access control system is supported by the SFR

Security Target RC-SA08/1 and RC-SA08/2

FIA_UAU.4 to make sure that unique authentication sessions shall be used every time. The SFRs FIA_UID.1 and FIA_UAU.1 complement the access control system operation by allowing very specific functions to be used without mutual authentication. The SFRs FMT_SMR.1 and FMT_MSA.1 in conjunction with the SFR FMT_SMF.1 allow for the implementation of a flexible, configurable access control system and specify the roles that shall be allowed to utilise the access control system configuration capabilities. The presented combination of the SFRs provides an access control system that, as required by the O.AC objective, is precisely specified, allows for very specific exceptions, and supports very flexible configuration.

The objective O.SC is directly realised through the requirement for the secure channel SFR FTP_ITC.1 between the TOE and the external device.

The objective O.Integrity is directly addressed through both the use of the SFR FDP_SDI.2 for the monitoring of the stored user data and the requirement that an action is taken when any integrity error occurs.

The objective O.Untrackability is addressed through the SFR FPR_UNL.1 which requires that unauthorised third party are unable to determine whether any operation of the TOE were caused by the same Card holder. The functionality provided by FPR_UNL.1 can be enabled or disabled by the Administrator through the SFRs FMT_MOF.1, FMT_SMR.1 and FMT_SMF.1.

The following table presents the list of the SFRs with the associated dependencies.

Table 18: Security Functional Requirements dependencies (except SFRs from the PP)

ID	SFR	Dependencies	Notes
FMT_SMR.1	Security roles	FIA_UID.1	Included
FIA_UID.1	Timing of identification	None	
FIA_UAU.1	Timing of authentication	FIA_UID.1	Included
FIA_UAU.4	Single-use authentication mechanisms	None	
FDP_ACC.1	Subset access control	FDP_ACF.1	Included
FDP_ACF.1	Security attribute based access control	FDP_ACC.1 FMT_MSA.3	Included Not satisfied
FMT_MOF.1	Management of security functions behaviour	FMT_SMR.1 FMT_SMF.1	Included Included
FMT_MSA.1	Management of security attributes	FDP_ACC.1 or FDP_IFC.1 FMT_SMR.1 FMT_SMF.1	Included (FDP_ACC.1) Included Included
FMT_SMF.1	Specification of Management Functions	None	
FPR_UNL.1	Unlinkability	None	
FTP_ITC.1	Inter-TSF trusted channel	None	

The SFR "FMT_MSA.3 Static attribute initialisation" is a dependency for the SFR FDP_ACF.1. In the TOE, however, the security attributes are always explicitly set and the notion of "default value" for a security attribute simply does not exist. The security attributes are always set explicitly by the Administrator to a value appropriate for each asset without exception, so it is our opinion that the system is no less secure in the absence of the SFR FMT_MSA.3. Therefore, there is no need to include the SFR FMT_MSA.3 in the ST.

Security Target RC-SA08/1 and RC-SA08/2

Regarding the Security Objectives defined in the Protection Profile, the section 6.3.1 of [BSI-PP-0084] provides both the rationale for choosing specific SFRs and how those requirements correspond to the specific Security Objectives. The following table gives an overview, how the SFRs are combined to meet the security objectives.

Table 19: TOE Security Functional Requirements versus Security Objectives defined in the PP

Objective	TOE Security Functional Requirements
O.Leak-Inherent	- FDP_ITT.1 "Basic internal transfer protection" - FPT_ITT.1 "Basic internal TSF data transfer protection" - FDP_IFC.1 "Subset information flow control"
O.Phys-Probing	- FDP_SDC.1 "Stored data confidentiality" - FPT_PHP.3 "Resistance to physical attack"
O.Malfunction	- FRU_FLT.2 "Limited fault tolerance" - FPT_FLS.1 "Failure with preservation of secure state"
O.Phys-Manipulation	- FDP_SDI.2 "Stored data integrity monitoring and action" - FPT_PHP.3 "Resistance to physical attack"
O.Leak-Forced	All requirements listed for O.Leak-Inherent - FDP_ITT.1, FPT_ITT.1, FDP_IFC.1 plus those listed for O.Malfunction and O.Phys-Manipulation - FRU_FLT.2, FPT_FLS.1, FPT_PHP.3
O.Abuse-Func	- FMT_LIM.1 "Limited capabilities" - FMT_LIM.2 "Limited availability" plus those for O.Leak-Inherent, O.Phys-Probing, O.Malfunction, O.Phys-Manipulation, O.Leak-Forced - FDP_ITT.1, FPT_ITT.1, FDP_IFC.1, FPT_PHP.3, FRU_FLT.2, FPT_FLS.1
O.Identification	- FAU_SAS.1 "Audit storage"
O.RND	- FCS_RNG.1 "Quality metric for random numbers" plus those for O.Leak-Inherent, O.Phys-Probing, O.Malfunction, O.Phys-Manipulation, O.Leak-Forced - FDP_ITT.1, FPT_ITT.1, FDP_IFC.1, FPT_PHP.3, FRU_FLT.2, FPT_FLS.1

The dependencies of SFRs defined in Protection Profile are listed in section 6.3.2 in [BSI-PP-0084]. The following table gives their dependencies and how they are satisfied.

Table 20: Security Functional Requirements dependencies taken from the PP

ID	SFR	Dependencies	Notes
FRU_FLT.2	Limited fault tolerance	FPT_FLS.1	Included
FPT_FLS.1	Failure with preservation of secure state	None	
FMT_LIM.1	Limited capabilities	FMT_LIM.2	Included
FMT_LIM.2	Limited availability	FMT_LIM.1	Included
FAU_SAS.1	Audit storage	None	
FDP_SDI.2	Stored data integrity monitoring and action	None	

Security Target RC-SA08/1 and RC-SA08/2

ID	SFR	Dependencies	Notes
FPT_PHP.3	Resistance to physical attack	None	
FDP_ITT.1	Basic internal transfer protection	FDP_ACC.1 or FDP_IFC.1	Included (FDP_ACC.1)
FDP_IFC.1	Subset information flow control	FDP_IFF.1	See section 6.3.2 in [BSI-PP-0084]
FPT_ITT.1	Basic internal TSF data transfer protection	None	
FCS_RNG.1	Quality metric for random numbers	None	

6.4 Security assurance requirements rationale

To meet the assurance expectations of customers, the assurance level EAL5 and the augmentation with the requirements ALC_DVS.2, AVA_VAN.5 and ASE_TSS.2 are chosen. The assurance level of EAL5 is selected because it provides a sufficient level of assurance for this type of TOE, which is expected to protect high value assets. Explanation of the security assurance component ALC_DVS.2, AVA_VAN.5 and ASE_TSS.2 follows:

- ALC_DVS.2 Sufficiency of security measures:
This Security Target selects ALC_DVS.2 instead of ALC_DVS.1 because it verifies the security measures that provide the necessary level of protection to maintain the confidentiality and integrity of the TOE and its user data.
- AVA_VAN.5 Highly resistant:
The TOE might be in danger of high-level attacks such as those it might encounter in a university laboratory. Therefore, AVA_VAN.5 is augmented to confirm that TOE has a high level of resistance against such attacks.
- ASE_TSS.2 TOE summary specification with architectural design summary:
ASE_TSS.2 is augmented instead of ASE_TSS.1 to enable potential customers to gain a general understanding of how the TOE protects itself against interference, logical tampering and bypass attacks.

The dependencies of SARs added to EAL5 are described in [CC Part 3]. The following table gives their dependencies and how they are satisfied.

Table 21: Security Assurance Requirements dependencies added to EAL5

ID	SFR	Dependencies	Notes
ALC_DVS.2	Sufficiency of security measures	None	
AVA_VAN.5	Advanced methodical vulnerability analysis	ADV_ARC.1 ADV_FSP.4 ADV_TDS.3 ADV_IMP.1 AGD_OPE.1 AGD_PRE.1 ATE_DPT.1	Dependencies are covered by the assurance components of EAL5 (ADV_ARC.1, ADV_FSP.5, ADV_TDS.4, ADV_IMP.1, AGD_OPE.1, AGD_PRE.1 and ATE_DPT.3).

Security Target RC-SA08/1 and RC-SA08/2

ID	SFR	Dependencies	Notes
ASE_TSS.2	TOE summary specification with architectural design summary	ASE_INT.1 ASE_REQ.1 ADV_ARC.1	Dependencies are covered by the assurance components of EAL5 (ASE_INT.1, ASE_REQ.2 and ADV_ARC.1).

7 Compatibility with the platform ST

This chapter describes the compatibility between this ST and the platform ST [ST-HW] in terms of security environments, security objectives, security functional requirements and security assurance requirements.

7.1 Security environment

The security environment of the platform and of the product is the same: in both cases it is a smart card running specific application software and operating in a potentially hostile environment in the presence of attacks.

Table 22: Correspondence of assets

Assets of TOE	Assets of platform
Primary assets are user data	User data of the Composite TOE
Secondary assets are all TSF data and other data and code.	Security IC Embedded Software, stored and in operation. Security services provided by the TOE for the Security IC Embedded Software.
	Logical design data, physical design data, IC Dedicated Software, and configuration data
	Initialisation Data and Pre-personalisation Data, specific development aids, test and characterisation related data, material for software development support, and photomasks

As we see from Table 22, the assets of the TOE are included as the assets of the platform, so there is no conflict between them.

Table 23: Correspondence of assumptions

Assumptions by TOE	Assumptions by platform
The TOE is administered in a secure manner after the TOE delivery.	The assumption is matched by the platform's A.Process-Sec-IC assumptions.
	A.Resp-Appl requests responsible management of the security relevant data from the TOE developer that has been followed by the developer.
	A.Secure-Values-MFPlus requests only confidential and secure keys are used to setup the authentication and access rights in MFPlus.
	A.Terminal-Support-MFPlus requests the terminal support ensure integrity for MFPlus.

Assumptions by TOE	Assumptions by platform
	A.Secure-Values-DESFire requests only confidential and secure keys are used to setup the authentication and access rights in DESFire.
	A.Terminal-Support-DESFire requests the terminal support ensure integrity for DESFire.

Table 23 shows that the assumptions of the TOE on the external environment match. The assumptions of the platform towards the software were taken into account by the developer.

Table 24: Correspondence of threats

Threat of TOE	Threat of platform	Contradiction between platform and the TOE
T.Phys-Manipulation	T.Phys-Manipulation	No contradiction.
T.Phys-Probing	T.Phys-Probing	(The Security Target of the TOE and platform are conformant with [BSI-PP-0084], and these threats are described in [BSI-PP-0084]. Therefore, these threats are compatible with the threats of the TOE.)
T.Malfunction	T.Malfunction	
T.Leak-Inherent	T.Leak-Inherent	
T.Leak-Forced	T.Leak-Forced	
T.Abuse-Func	T.Abuse-Func	
T.RND	T.RND	
	T.Mem-Access	
	T.Data-Modification-MFPlus	N/A
	T.Impersonate-MFPlus	(The TOE does not include the functionality of MIFARE Plus.)
	T.Cloning-MFPlus	
	T.Confid-Applic-Code-MFPlus	
	T.Confid-Applic-Data-MFPlus	
	T.Integ-Applic-Code-MFPlus	
	T.Integ-Applic-Data-MFPlus	
	T.Application-Resource-MFPlus	
	T.Data-Modification-DESFire	N/A
	T.Impersonate-DESFire	(The TOE does not include the functionality of MIFARE DESFire.)
	T.Cloning-DESFire	
	T.Confid-Applic-Code-DESFire	
	T.Confid-Applic-Data-DESFire	
	T.Integ-Applic-Code-DESFire	
	T.Integ-Applic-Data-DESFire	
	T.Resource-DESFire	

Note) The FeliCa OS including data is isolated by LPU from the rest of the code embedded in the device, and is designed and implemented to grant access to restricted information. Therefore T.Mem-Access is not realized in the TOE.

Table 24 shows that there is no contradiction of threats between platform and the TOE.

Table 25: Correspondence of organisational security policies

OSP of platform	Contradiction between platform and the TOE
BSI.P.Process-TOE	No contradiction. (The Security Target of the TOE and platform are conformant with [BSI-PP-0084], and this OSP is described in [BSI-PP-0084]. Therefore, this OSP is compatible with the OSP of the TOE.)
BSI.P.Lim-Block-Loader	N/A (Flash loader is not available in User configuration.)
AUG1.P.Add-Functions	No contradiction.
P.Controlled-ES-Loading	N/A (Flash loader is not available in User configuration.)
P.Encryption	N/A
P.MAC	(The TOE does not include the functionality of MIFARE Plus and MIFARE DESFire.)
P.No-Trace-MFPlus	
P.Confidentiality	
P.Transaction	
P.No-Trace-DESFire	
P.Resp-Appl	No contradiction. (The Security Target of the TOE and platform are conformant with [BSI-PP-0084], and this OSP is assigned from A.Resp-Appl defined in [BSI-PP-0084]. Therefore, this OSP is compatible with the OSPs of the TOE.)

Table 25 shows that there is no contradiction of organizational security policies between platform and the TOE.

7.2 Security objectives

The following tables present the summary of the designation of the security objectives and the security objectives for operational environment which are presented in [ST-HW] from the point of view of the TOE:

Table 26: Correspondence of security objectives

Security objectives of platform	Contradiction between platform and the TOE
BSI.O.Leak-Inherent	No contradiction.
BSI.O.Phys-Probing	No contradiction.
BSI.O.Malfunction	No contradiction.
BSI.O.Phys-Manipulation	No contradiction.
BSI.O.Leak-Forced	No contradiction.
BSI.O.Abuse-Func	No contradiction.

Security Target RC-SA08/1 and RC-SA08/2

Security objectives of platform	Contradiction between platform and the TOE
BSI.O.Identification	No contradiction.
BSI.O.RND	No contradiction.
BSI.O.Cap-Avail-Loader	N/A (Flash loader is not available in User configuration.)
AUG1.O.Add-Functions	No contradiction.
AUG4.O.Mem-Access	No contradiction.
O.Controlled-ES-Loading	N/A (Flash loader is not available in User configuration.)
O.Access-Control-MFPlus	N/A
O.Authentication-MFPlus	(The TOE does not include the functionality of MIFARE Plus.)
O.Encryption	
O.MAC-MFPlus	
O.Type-Consistency-MFPlus	
O.No-Trace-MFPlus	
O.Resp-Appl-MFPlus	
O.Resource-MFPlus	
O.Firewall-MFPlus	
O.Shr-Var-MFPlus	
O.Verification-MFPlus	
O.Access-Control-DESFire	N/A
O.Authentication-DESFire	(The TOE does not include the functionality of MIFARE DESFire.)
O.Confidentiality-DESFire	
O.Type-Consistency-DESFire	
O.Transaction-DESFire	DESFire
O.No-Trace-DESFire	Preventing
O.Resp-Appl-DESFire	
O.Resource-DESFire	
O.Firewall-DESFire	
O.Shr-Res-DESFire	
O.Verification-DESFire	

Table 26 shows that there is no contradiction of security objectives between platform and the TOE.

Table 27: Correspondence of security objectives for operational environment

security objectives for the operational environment of platform	Contradiction between platform and the TOE
BSI.OE.Resp-Appl	No contradict.
BSI.OE.Process-Sec-IC	No contradict.

security objectives for the operational environment of platform	Contradiction between platform and the TOE
BSI.OE.Lim-Block-Loader	N/A
OE.Secure-Values-MFPlus	N/A
OE.Terminal-Support-MFPlus	N/A
OE.Secure-Values-DESFire	N/A
OE.Terminal-Support-DESFire	N/A

Table 27 shows that there is no contradiction of security objectives for the operational environment between platform and the TOE.

7.3 Security functional requirements

From the point of view of this Security Target, the TOE's security functional requirements are directed towards providing the user with a particular service. At the same time, the hardware platform security functional requirements jointly fall under the self-protection and supporting functions from the point of view of the TOE. Therefore, there is no conflict between the security functional requirements of the TOE and the hardware platform.

The following table presents the summary of the designation of the security functional requirements presented in [ST-HW] from the point of view of the TOE:

Table 28: SFR designation from the TOE perspective

SFR of platform	Description
FRU_FLT.2	The STs of the TOE and platform are conformant with [BSI-PP-0084], and these SFRs are described in [BSI-PP-0084]. Therefore, these SFRs are compatible with the SFRs of the TOE.
FPT_FLS.1	
FMT_LIM.1 / Test	Test function is not available in User configuration.
FMT_LIM.2 / Test	
FMT_LIM.1 / Loader	Flash loader is not available in User configuration.
FMT_LIM.2 / Loader	
FAU_SAS.1	The STs of the TOE and platform are conformant with [BSI-PP-0084], and these SFRs are described in [BSI-PP-0084]. Therefore, these SFRs are compatible with the SFRs of the TOE.
FDP_SDC.1	
FDP_SDI.2	
FPT_PHP.3	
FDP_ITT.1	
FPT_ITT.1	
FDP_IFC.1	
FCS_RNG.1	
FCS_COP.1	The DES related functions are not claimed as a security function in this Security Target.

Security Target RC-SA08/1 and RC-SA08/2

SFR of platform	Description	
FCS_CKM.1 (if Neslib is embedded only)	The TOE does not include "Neslib".	
FDP_ACC.2 / Memories	The TOE does not use MPU function.	
FDP_ACF.1 / Memories		
FMT_MSA.3 / Memories		
FMT_MSA.1 / Memories		
FMT_SMF.1 / Memories		
FDP_ITC.1 / Loader	Flash loader is not available in User configuration.	
FDP_ACC.1 / Loader		
FDP_ACF.1 / Loader		
FMT_MSA.3 / Loader		
FMT_MSA.1 / Loader		
FMT_SMF.1 / Loader		
FIA_UID.1 / Loader		
FMT_SMF.1 / Loader		
FMT_SMR.1 / MFPlus		The TOE does not include the functionality of MIFARE Plus.
FDP_ACC.1 / MFPlus		
FDP_ACF.1 / MFPlus		
FMT_MSA.3 / MFPlus		
FMT_MSA.1 / MFPlus		
FMT_SMF.1 / MFPlus		
FDP_ITC.2 / MFPlus		
FDP_TDC.1 / MFPlus		
FIA_UID.2 / MFPlus		
FIA_UAU.2 / MFPlus		
FIA_UAU.5 / MFPlus		
FMT_MTD.1 / MFPlus		
FPT_TRP.1 / MFPlus		
FCS_CKM.4 / MFPlus		
FPT_RPL.1 / MFPlus		
FPR_UNL.1 / MFPlus		
FRU_RSA.2 / MFPlus		
FDP_RIP.1 / MFPlus		
FMT_SMR.1 / DESFire	The TOE does not include the functionality of MIFARE DESFire.	
FDP_ACC.1 / DESFire		
FDP_ACF.1 / DESFire		

SFR of platform	Description
FMT_MSA.3 / DESFire	
FMT_MSA.1 / DESFire	
FMT_SMF.1 / DESFire	
FDP_ITC.2 / DESFire	
FPT_TDC.1 / DESFire	
FIA_UID.2 / DESFire	
FIA_UAU.2 / DESFire	
FIA_UAU.5 / DESFire	
FMT_MTD.1 / DESFire	
FPT_TRP.1 / DESFire	
FCS_CKM.4 / DESFire	
FDP_ROL.1 / DESFire	
FPT_RPL.1 / DESFire	
FPR_UNL.1 / DESFire	
FRU_RSA.2 / DESFire	
FDP_RIP.1 / DESFire	
FDP_ACC.1 / APPLI_FWL	The LPU is used to isolate FeliCa OS (code and data) from the rest of the code embedded in the device.
FDP_ACF.1 / APPLI_FWL	
FMT_MSA.3 / APPLI_FWL	The security attributes are always explicitly set and the notion of "default value" for a security attribute simply does not exist.

7.4 Security assurance requirement

The evaluation level of the TOE is EAL5 augmented with ASE_TSS.2, ALC_DVS.2 and AVA_VAN.5. The evaluation level of the platform is EAL5 augmented with ADV_IMP.2, ADV_INT.3, ADV_TDS.5, ALC_CMC.5, ALC_DVS.2, ALC_FLR.1, ALC_TAT.3, ASE_TSS.2, ATE_COV.3, ATE_FUN.2 and AVA_VAN.5. The evaluation level of the platform is same as or higher than the evaluation level of the composite product.

8 TOE Summary Specification

This chapter describes the TOE summary specification by summarising the architectural design.

The TOE summary specification includes the following:

- TOE summary specification rationale
Describes how the TOE meets each SFR.
- TOE architectural design summary
Describes how the TOE protects itself against interference, logical tampering and bypass.

8.1 TOE summary specification rationale

This section describes how the TOE is intended to comply with the Security Functional Requirements. The TOE must satisfy the requirements for secure storage, transfer and management of user data. Therefore, the TOE is implemented as a software platform on a secure chip.

The TOE includes the functions for creating secure storage containers and management of the security attributes of those containers. The TOE provides functions for populating the containers with user data in various ways that are functionally required by the customers, retrieval of the data or updating the data in situ.

The transfer of data during the operations on secure containers is performed in a secure way, where the external security product and the TOE are mutually authenticated before the operation and then connected with each other via an encrypted session. The session allows the bilateral transfer of data in a manner protected from eavesdropping and alteration.

In compliance with the requirements, the TOE also provides a capability for the unsecured storage and retrieval of user data. The security attributes can be set up in such a manner that the data can be retrieved insecurely, but updated only in a secure manner, allowing for a flexible and fully-configurable access-control system.

- “FMT_SMR.1 Security roles” is met by providing an ability to distinguish between the roles of “Administrator” and “User”, where the different roles allow the subject to execute different kinds of operations. The TOE has built-in rules for distinguishing between the operations and required security attributes for various TOE and TSF data. The Administrator of the TOE specifies the security attributes for the TOE data and the TSF data. The role of the authenticated entity is assigned after the authentication has succeeded (in accordance with the requirements of FDP_ACC.1).
- “FIA_UID.1 Timing of identification” and “FIA_UAU.1 Timing of authentication” are intended to provide a possibility to configure a publically-accessible container. The TOE provides access to such specifically-configured containers based on the security attributes of the container. The container must be configured, by the Administrator, with special attributes that allow the specified mode of access before authentication.
- The TOE uses random numbers in the authentication mechanism to comply with the “FIA_UAU.4 Single-use authentication mechanisms” requirement; these numbers are generated by the random number generator (FCS_RNG.1). The random numbers are generated anew each time the authentication is started, according to the requirements of FDP_ACC.1, and are discarded each time the TOE exits the authenticated state.

Security Target RC-SA08/1 and RC-SA08/2

- “FDP_ACC.1 Subset access control” and “FDP_ACF.1 Security attribute based access control” are satisfied by providing an access-control mechanism based on the attributes of security containers. The TOE grants access to the TOE data stored in the containers, based on the security attributes during the authentication phase. If the correct security attributes are used during the authentication for the requested mode of access to the specified container, the requested mode of access is granted. The granularity of access control is based on a single mode of access and a single container. A request for access may combine attributes for several containers and several modes of access in a single request. The security attributes are assigned to the containers by the Administrator. The TOE allows the Administrator to access the security attributes for configuration purposes, based on the security attributes (in accordance with FMT_MSA.1 and FMT_SMR.1).
- “FMT_MOF.1 Management of security functions behaviour” provides an option to use a random ID number during the anti-collision sequence between the TOE and CL_Term to prevent Card holder from being tracked by unauthorised third party. The TOE allows the Administrator to enable or disable the random ID function in accordance with FMT_SMF.1 and FMT_SMR.1)
- “FMT_MSA.1 Management of security attributes” and “FMT_SMF.1 Specification of Management Functions” are met by providing configuration capabilities accessible to the Administrator. The configuration capabilities are granted based on the security attributes and allow the changing of these security attributes to new values after successful authentication and privilege verification (in accordance with FDP_ACC.1 and FMT_SMR.1).
- “FDP_SDI.2 Stored data integrity monitoring and action” is satisfied through the monitoring of user data stored in secure containers for bit integrity errors. The TOE uses a cyclic redundancy check (CRC) based on CRC-16-CCITT to verify the correctness of the stored data at each start-up and at each access. If an error is detected, the TOE takes the appropriate action to ensure the security of the data.
- “FPR_UNL.1 Unlinkability” is satisfied by using a random ID number during the anti-collision sequence between the TOE and CL_Term. The TOE does not send its unique ID number, but generates a new random ID number by the request from CL_Term and sends the random ID number during anti-collision sequence. Therefore, the TOE can no longer be tracked by any unauthorised third party simply by retrieving its ID number.
- “FTP_ITC.1 Inter-TSF trusted channel” requires the secure channel to be protected against attackers with High attack potential – this is provided by the TOE using the AES algorithm, which is calculated by the hardware, for encrypting and authenticating data that is sent or received through the link.
- “FRU_FLT.2 Limited fault tolerance” and “FPT_FLS.1 Failure with preservation of secure state” are satisfied by a group of security measures that guarantee correct operation of the TOE.

The TOE ensures its correct operation and prevents any malfunction while the Security IC Embedded Software is executed and utilizes standard functions offered by the micro-controller (standard CPU instruction set including usage of standard peripherals such as memories, registers, I/O interfaces, timers etc.) and of all other specific security functionality.

This is achieved through an appropriate design of the TOE and the implementation of filters for high-frequency pulse, sensors/detectors for supplied voltage, frequency, temperature, light and glitch signal, and address area monitoring and integrity monitoring. In case that any malfunction occurred or may likely occur, the TOE stops operation or triggers system reset to preserve a secure state.

- “FDP_ITT.1 Basic internal transfer protection”, “FDP_IFC.1 Subset information flow control” and “FPT_ITT.1 Basic internal TSF data transfer protection” are satisfied by implementing several measures that provides logical protection against leakage. The TOE ensures the prevention of the disclosure of user data or TSF data through the measurement of the power consumption, electromagnetic emission or calculation time, and subsequent signal processing. This is achieved through the measures to eliminate/limit the secret information contained in power consumption,

electromagnetic emission or calculation time, and small-space implementation by advanced CMOS process, and variable timing noise to randomly delay the critical operation.

- “FPT_PHP.3 Resistance to physical attack” and “FDP_SDC.1 Stored data confidentiality” are satisfied by implementing security measures that provides physical protection against physical probing and manipulation. The protection of the TOE is achieved through measures which comprise passive/active shield, specific encryption for the memory blocks, data scrambling between the blocks, glue logic layout of multiple blocks, sensor signal monitoring and address area monitoring. If the physical manipulation or physical probing attack is detected, the TOE stops operation.
- “FMT_LIM.1 Limited capabilities”, “FMT_LIM.2 Limited availability” and “FAU_SAS.1 Audit storage” are satisfied by implementing of a complicated test mode control mechanism that prevents abuse of test functionality delivered as part of the TOE. The test functionality is not available to the user after Phase 3 IC Manufacturing as defined in the Protection Profile [BSI-PP-0084]. The TOE has complicated access control mechanisms in place to prevent using this functionality.
- “FCS_RNG.1 Random number generation” is satisfied by providing a random number generator. The TOE contains the random number generator which comprises a physical noise source, total failure tests and online quality test on this noise source and a deterministic random number generator based on the AES algorithm. The seed data is input to the deterministic random number generator. The random number generator passes the NIST test suite [SP800-22].

8.2 TOE architectural design summary

This section describes how the TOE protects itself against interference, logical tampering and bypass, which are classified into established attacks in the smartcard. The TOE provides the countermeasures against such attacks by the interaction of the underlying hardware platform and the software together as follows:

- Physical attacks and overcoming sensors/filters
The hardware platform has countermeasures against physical attacks and overcoming sensors/filters, which aim at disconnecting IC security features and accessing secret data by extracting internal signals or deactivating the sensors. The protection of the TOE comprises a set of countermeasures that are specifically described for FPT_PHP.3 and FDP_SDC.1 in the section 6.1.
- Perturbation attacks
The hardware platform and software have countermeasures against perturbation attacks, which change the normal IC behaviour to create an exploitable error during operation. Such attacks eventually aim to recover encryption keys, or change either the result of authentication or the program flow. The countermeasure of hardware platform comprises a set of countermeasures that are specifically described for FRU_FLT.2 and FPT_FLS.1 in the section 6.1. The software countermeasure comprises elaborate checks for the protection of critical program flow and security flags which are very difficult to manipulate to the attacker’s chosen value.
- Differential fault analysis attack
The hardware platform and software have countermeasures against differential fault analysis, which aims at obtaining a secret data by comparing an error-free calculation and erroneous calculations. The software countermeasure comprises an elaborate verification process to detect the manipulation of various parameters, such as return value, data length and plain/cipher text. In combination with software countermeasure, various sensors implemented in the hardware platform make attack much harder.
- Exploitation attack of test function

The hardware platform has countermeasures against abuse of IC test function, which might lead to disclosure or corruption of memory content. The protection of the TOE comprises a set of countermeasures that are specifically described for FMT_LIM.1, FMT_LIM.2 and FAU_SAS.1 in the section 6.1.

- Side-channel attacks

The hardware platform has countermeasures against side-channel attacks, which aim at obtaining secret data by exploiting information leaked through characteristic variations in the calculation time and power consumption or electromagnetic emission. The protection of the TOE comprises a set of countermeasures that are specifically described for FDP_ITT.1, FDP_IFC.1 and FPT_ITT.1 in the section 6.1.

- Attacks on RNG

The hardware and software have countermeasures against attacks on RNG, which aims at predicting the output of the RNG. The countermeasure of hardware platform comprises a set of countermeasures that are specifically described for FCS_RNG.1 in the section 6.1. The software countermeasure comprises elaborate program flow checks for ensuring the complete operation of deterministic random number generator.

- Software attacks

- Replay attacks

The software has countermeasures against replay attack. The countermeasure against replay attack comprises using sequence numbers with integrity protection by the message authentication code, which making the reuse of recorded valid messages much harder.

- Bypass authentication or access control

The software has countermeasures against bypass attack. The bypass protection of authentication and access control comprises the command verification process, which does not accept commands that contain invalid command code and which prevents the execution of “unexpected” commands in the current authentication mode. The bypass protection of the secure channel includes the message authentication code, which rejects fake encrypted data.

- Direct protocol attacks

The software has countermeasures against direct protocol attack. An example of a direct protocol attack is an “unexpected” power off. The protection of the TOE includes the anti-tearing and rollback mechanism to ensure that the data in Flash memory is not corrupted. Whenever the power is switched off and a piece of data has been written to Flash memory only partially, the anti-tearing and rollback mechanism restores the previous state of Flash memory.

- Editing commands

The software has countermeasures against editing command attack. The countermeasure against editing command comprises the command verification process, which accepts only valid command.

9 Glossary and references

This chapter explains the terms, definitions and literary references (bibliography) used in this document. The list entries in this chapter are ordered alphabetically.

9.1 Terms and definitions

The following list defines the product-specific terms used in this document:

Administrator

The entity responsible for personalisation of the TOE. In most cases, this is a representative of a Service Provider. Synonymous with Personaliser. See also User.

Area

A part of the FeliCa file system. An area is similar to a directory in a general file system.

Card holder

A person who uses User Service.

Contact card reader (CT_Term)

A contact smartcard Reader/Writer that interacts with the TOE.

Contactless card reader (CL_Term)

A contactless smartcard Reader/Writer that interacts with the TOE.

FeliCa file system

The structure of data in the TOE.

FeliCa Service

The part of the FeliCa file system that contains information that stipulates the method of access to data. In this context, a service is similar to a file in a general file system.

Personaliser

See Administrator.

Service Provider

An entity that provides a specific service to a User.

User

For this product, an entity using any FeliCa Service that a personalised TOE offers. See also Administrator.

User Service

A specific service to a Card holder that is made technically possible by the TOE. Each User Service is provided by a Service Provider to a Card holder. An example of a User Service is a virtual train ticket or an electronic purse.

9.2 Acronyms

The following table lists and defines the product-specific abbreviated terms (acronyms) that appear in this document:

Table 29: Abbreviated terms and definitions

Term	Definition
ACL	Access Control List
APDU	Application Protocol Data Unit
ID	Identification
OS	Operating System
PP	Protection Profile
RF	Radio Frequency
SAR	Security Assurance Requirement
SFR	Security Functional Requirement
ST	Security Target
TOE	Target of Evaluation
TSF	TOE Security Functions

9.3 Bibliography

The following list defines the literature referenced in this document:

- [AAPS] "Common Criteria Supporting Document Mandatory Technical Document Application of Attack Potential to Smartcards", Version 2.7, Revision 1, March 2009
- [BSI-PP-0084] "Security IC Platform Protection Profile with Augmentation Packages", Version 1.0, January 2014
- [CC] "Common Criteria for Information Technology Security Evaluation", Version 3.1 (composed of Parts 1-3, [CC Part 1], [CC Part 2], and [CC Part 3])
- [CC Part 1] "Common Criteria for Information Technology Security Evaluation – Part 1: Introduction and general model", Version 3.1, Revision 4, September 2012
- [CC Part 2] "Common Criteria for Information Technology Security Evaluation – Part 2: Security functional components", Version 3.1, Revision 4, September 2012
- [CC Part 3] "Common Criteria for Information Technology Security Evaluation – Part 3: Security assurance components", Version 3.1, Revision 4, September 2012

Security Target RC-SA08/1 and RC-SA08/2

- [CC CEM] "Common Methodology for Information Technology Security Evaluation: Evaluation Methodology", Version 3.1, Revision 4, September 2012
- [CCDB-COMP] Composite product evaluation for Smart Cards and similar devices v.1.2, April 2012 (CCDB-2012-04-001)
- [ISO 18092] "Information technology – Telecommunications and information exchange between systems – Near Field Communication – Interface and Protocol (NFCIP-1)"
- [SP800-22] "A Statistical Test Suite for Random and Pseudorandom Number Generators for Cryptographic Applications", NIST Special Publication 800-22, Revision 1a, April 2010
- [ST-HW] "ST31G480 A02 platform Security Target for Composition, Revision A02.4, June 2016"

Multi-Interface Smart Card IC

Security Target RC-SA08/1 and RC-SA08/2

Version 1.51

Version 1.51: June 2017

Sony Corporation

No. A08-STP-E01-51

© 2017 Sony Corporation

Printed in Japan