



RICOH IM C530F / C530FB version E-1.10-H

Security Target

Version 2.5

July 2023

Document prepared by



www.lightshipsec.com

Document History

Version	Date	Description
1.0	7 July 2021	Updated CAVP Cert # and CC Release version to match PP
1.1	13 July 2021	Developer comments
1.2	29 July 2021	Evaluator comments
1.3	20 August 2021	Certifier comments
1.4	31 August 2021	Addressed CB ORs.
1.5	8 October 2021	Addressed NIAP comments.
2.0a	24 Jan 2023	Draft update for re-evaluation on E-1.10-H
2.1	06 Feb 2023	ST Updates
2.2	08 March 2023	Addressed OR01
2.3	17 May 2023	ST Updates
2.4	06 July 2023	CAVP Table Updates
2.5	18 July 2023	ST Updates

Table of Contents

1	Introduction.....	5
1.1	Overview	5
1.2	Identification	5
1.3	Conformance Claims	5
1.4	Terminology.....	6
2	TOE Description.....	7
2.1	Type.....	7
2.2	Usage.....	7
2.3	Physical Scope.....	9
2.4	Logical Scope.....	10
3	Security Problem Definition	13
3.1	Users.....	13
3.2	Assets	13
3.3	Threats	15
3.4	Assumptions.....	15
3.5	Organizational Security Policies.....	16
4	Security Objectives.....	16
5	Security Requirements	18
5.1	Conventions	18
5.2	Extended Components Definition	18
5.3	Functional Requirements	19
5.4	Assurance Requirements.....	36
6	TOE Summary Specification	37
6.1	Security Audit	37
6.2	Identification and Authentication	38
6.3	Access Control	39
6.4	Cryptographic Operations	40
6.5	Protection of the TSF	41
6.6	Trusted Communications.....	41
6.7	Administrative Roles	42
6.8	Trusted Operation.....	43
6.9	PSTN Fax-Network Separation	45
7	Rationale	46
7.1	Conformance Claim Rationale	46
7.2	Security Objectives Rationale	46
7.3	Security Assurance Requirements rationale	48

List of Tables

Table 1: Evaluation identifiers.....	5
Table 2: NIAP Technical Decisions.....	5
Table 3: Terminology.....	6
Table 4: TOE Models.....	9
Table 5: CAVP Certificates.....	10
Table 6: User Categories.....	13
Table 7: Asset Categories	13
Table 8: User Data Types.....	13

Table 9: Document and Job Attributes 14

Table 10: TSF Data Types..... 14

Table 11: Threats 15

Table 12: Assumptions 16

Table 13: Organizational Security Policies 16

Table 14: Security Objectives for the TOE 16

Table 15: Security Objectives for the Operational Environment 17

Table 16: Extended Components..... 18

Table 17: Summary of SFRs..... 19

Table 18: Audit Events 21

Table 19: D.USER.DOC Access Control SFP 25

Table 20: D.USER.JOB Access Control SFP 27

Table 21: Management of TSF Data 31

Table 22: Management Functions..... 32

Table 23: TOE Security Assurance Requirements 36

Table 24: List of Audit Events 37

Table 25: Stored Documents Access Control Rules for Normal Users 40

Table 26: Random Number Sources..... 40

Table 27: TLS/HTTPS Cryptographic Functions..... 42

Table 28: Start-up Integrity Tests..... 44

Table 29: Signature Verification..... 45

Table 30: Security Objectives Rationale..... 46

1 Introduction

1.1 Overview

- 1 This Security Target (ST) defines the RICOH IM C530F / C530FB version E-1.10-H Target of Evaluation (TOE) for the purposes of Common Criteria (CC) evaluation.

1.2 Identification

Table 1: Evaluation identifiers

Target of Evaluation	RICOH IM C530F / C530FB version E-1.10-H
Security Target	RICOH IM C530F / C530FB version E-1.10-H Security Target, v2.5

- 2 **Note:** The TOE version (E-1.10-H) is the collection of an alternative set of firmware packages. The complete list of firmware packages and versions can be found in Section 1.3.2 of the CC Guide.

1.3 Conformance Claims

- 3 This ST supports the following conformance claims:
- CC version 3.1 revision 5
 - CC Part 2 extended
 - CC Part 3 conformant
 - Protection Profile for Hardcopy Devices, v1.0
 - Protection Profile for Hardcopy Devices, v1.0, Errata #1, June 2017
 - NIAP Technical Decisions per Table 2

Table 2: NIAP Technical Decisions

TD #	Name	Rationale if n/a
TD0157	FCS_IPSEC_EXT.1.1 - Testing SPDs	IPsec not claimed.
TD0176	FDP_DSK_EXT.1.2 - SED Testing	SFR not claimed
TD0219	NIAP Endorsement of Errata for HCD PP v1.0	
TD0253	Assurance Activities for Key Transport	FCS_COP.1.1(i) not claimed
TD0261	Destruction of CSPs in flash	
TD0299	Update to FCS_CKM.4 Assurance Activities	
TD0393	Require FTP_TRP.1(b) only for printing	
TD0474	Removal of Mandatory Cipher Suite in FCS_TLS_EXT.1	

TD #	Name	Rationale if n/a
TD0494	Removal of Mandatory SSH Ciphersuite for HCD	SSH is not claimed.
TD0562	Test activity for Public Key Algorithms	SSH is not claimed.
TD0642	FCS_CKM.1(a) Requirement; P-384 keysize moved to selection	

1.4 Terminology

Table 3: Terminology

Term	Definition
BEV	Border Encryption Value
eMMC	embedded MultiMediaCard – A non-field-replaceable non-volatile memory storage device that the TOE uses to store documents and user account information.
Firewall	A device to protect the LAN from internet threats.
LAN	Local Area Network — Network used in the TOE environment
Ic key	A hardware secure module which provides true random number generation and protected storage for the TOE.
MFP	Multifunction Printer
NTP Server	An external IT entity used by the TOE for time synchronization.
NVRAM	The NVRAM is a non-field-replaceable non-volatile storage device where TOE configuration data is stored.
PSTN	Public Switched Telephone Network
PSTN Line	A connection to a public switched telephone network for the TOE to communicate with external fax machines
SMTP Server	An external IT entity used by the TOE for e-mail transmission
Syslog Server	An external IT entity used by the TOE for audit log storage

2 TOE Description

2.1 Type

4 The TOE is a Digital Multi-Function Printer (MFP), which is an IT device that inputs, stores, and outputs electronic and hardcopy documents.

2.2 Usage

5 The expected use cases for the TOE are:

- a) **Scanning.** The TOE scans paper documents and then transmits and deletes the scanned images, on command from the Operation Panel.
- b) **Printing.** The TOE prints or stores documents received from a printer driver installed on the client computer, and prints or deletes previously stored documents from commands from the Operation Panel or the client computer's web browser.
- c) **Copying.** The TOE scans paper documents to be printed.
- d) **Network Communications.** The TOE is connected to its operational environment through a local area network (hereafter "LAN") and the public switched telephone network (PSTN). It sends and receives documents over the LAN and the PSTN.
- e) **Administration.** The TOE provides management functions to configure and manage its operation. The management functions are accessible locally from the Operation Panel or remotely through the Web Image Monitor (hereafter "WIM") accessible using a web browser on a client computer.
- f) **PSTN Faxing.** The TOE provides fax transmission and fax reception functions; both exchange documents according to the Group 3 standard over a Public Switch Telephone Network (PSTN). The Fax Transmission Function sends scanned images of paper documents, or images of electronic documents from a client computer, to external fax devices. The Fax Reception Function receives documents from external fax devices, and stores them in the TOE.
- g) **Internal Audit Log Storage.** The MFP stores its audit data internally on the local device in addition to providing the capability for storing them externally to a remote syslog server.

2.2.1 Deployment

6 As shown in Figure 1, the TOE is connected to its operational environment through a local area network (hereafter "LAN") and the public switched telephone network (PSTN). Other elements of the TOE's operational environment are as shown.

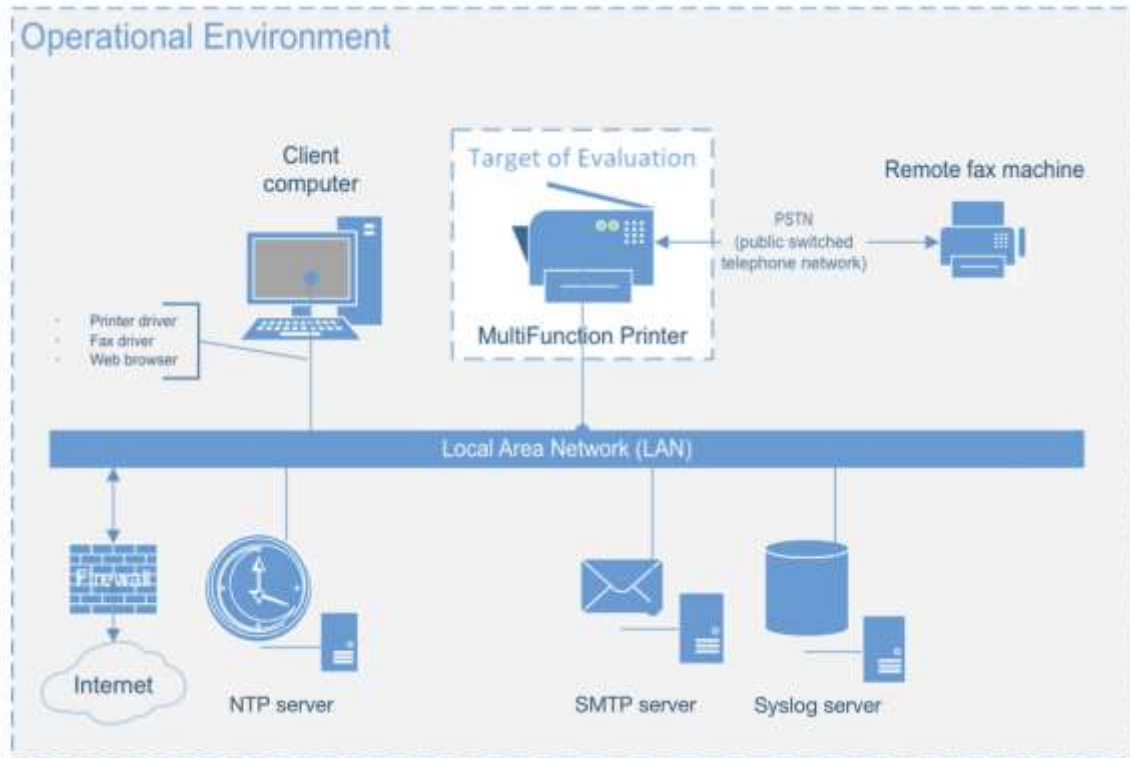


Figure 1: Example TOE deployment

2.2.2 Interfaces

7 The TOE interfaces include the following:

- a) **Operation Panel of the MFP** is an LCD touch screen interface that provides a local user interface where users can perform the following operations:
 - i. Configuration of the MFP
 - ii. Copying, faxing, storage, and network transmission of paper documents
 - iii. Printing, faxing, network transmission, and deletion of the stored documents
 - iv. Receiving fax documents via telephone lines and storing them
- b) **Web Image Monitor (WIM)** this is the remote user interface accessible via TLS/HTTPS where users can perform the following operations:
 - i. Limited configuration of the MFP – various settings
 - ii. Printing of documents
 - iii. Faxing of documents
- c) **Client printer driver or fax driver** is a remote user interface where communication is protected using TLS.

- d) **TLS interface:** The TOE is configured to use TLS to protect communication with a remote syslog server and remote SMTP server.
- e) **PSTN Fax Line** is used to connect to a remote fax machine.

2.3 Physical Scope

- 8 The physical boundary of the TOE is comprised of the software and hardware of the MFP models identified in Table 4 (which shows the different RICOH Family Group brand names for the TOE) and related guidance documentation. The TOE is delivered by commercial courier and is installed with the assistance of a RICOH customer engineer.
- 9 The TOE model number indicates the copy rate (higher numbers indicate the higher copy rate). The differences between models are not security relevant and are limited to print engine components (speed) and branding variations (labels, displays, packaging materials and documentation).

Table 4: TOE Models

Branding	Model
RICOH	IM C530F
nashuatec	IM C530FB
Rex Rotary	
Gestetner	
SAVIN	IM C530FB
LANIER	

- 10 The TOE includes the following critical components:
- a) **Main Controller.** Provides primary printing, scanning, faxing, and networking functionality.
 - i) **CPU.** Marvell 88PA6270.
 - ii) **OS.** Linux 4.2.8.
 - b) **Operation Unit.** Provides front panel interface control and device extensibility capabilities.
 - i) **CPU.** ARM Cortex-A9 Quad Core.
 - ii) **OS.** Linux 3.18 (customized).

2.3.1 Guidance Documents

- 11 The TOE guidance documentation includes the following:
- a) RICOH IM C530F/C530FB version E-1.10-H Common Criteria Guide, v1.6 (PDF)
 - b) [User Guide IM C530 series](#), D0CS7600 2023.03 (HTML)
 - c) [User Guide Security Reference](#), D0CS7189 2023.01 (HTML)

2.4 Logical Scope

- 12 The logical scope of the TOE comprises the security functions provided by the TOE to include:
- a) **Security Audit.** The TOE generates audit records of user and administrator actions. It stores audit records both locally and on a remote syslog server.
 - b) **Cryptographic Support.** The TOE includes multiple cryptographic modules for the cryptographic operations that it performs. The relevant CAVP certificate numbers are noted in Table 5 below.
 - c) **Access Control.** The TOE enforces access control policy to restrict access to user data. The TOE ensures that documents, document processing job information, and security-relevant data are accessible only to authenticated users who have the appropriate access permissions.
 - d) **Identification and Authentication.** Except for a defined minimal set of actions that can be performed by an unauthenticated user, the TOE ensures that all users must be authenticated before accessing its functions and data. Users log in to the TOE by entering their credentials on the local operation panel, through WIM login, through print or fax drivers, or using network authentication services.
 - e) **Administrative Roles.** The TOE provides the capability for managing its functions and data. Role-based access controls ensure that the ability to configure the security settings of the TOE is available only to the authorized administrators. Authenticated users can perform copy, printer, scanner and fax operations based on the user role and the assigned permissions.
 - f) **Trusted Operations.** The TOE performs power-on self-tests to ensure the integrity of the TSF components. It provides a mechanism for performing trusted update that verifies the integrity and authenticity of the upgrade software before applying the updates.
 - g) **TOE Access.** Interactive user sessions at the local and remote user interfaces are automatically terminated by the TOE after a configured period of inactivity.
 - h) **Trusted Communications.** The TOE protects communications from its remote users using TLS/HTTPS. The TOE is configured to use TLS to protect communication with the Syslog and SMTP servers.
 - i) **PSTN Fax-Network Separation.** The TOE restricts information received from or transmitted to the telephone network to only fax data and fax protocols. It ensures that the fax modem cannot be used to bridge the LAN.

2.4.1 CAVP Certificates

13 The TOE includes the cryptographic modules with related CAVP certificates shown Table 5 below.

Table 5: CAVP Certificates

Module	Operating Environment	Algorithms	CAVP	Usage
RICOH Platform Validation Library for Type-1.5fu (Kernel)	Marvell 88PA6270	SHA-1	A1328	Self-test (integrity)

Module	Operating Environment	Algorithms	CAVP	Usage
Platform Validation Library for coreutils, v8.23	Marvell 88PA6270	SHA-1	A1327	Self-test (integrity)
Boot SHA-1 Module, v47.04	ST33TPHF2ESPI	SHA-1	C715	Self-test (integrity)
RICOH Cryptographic Library for ima-evm-utils, v2.0	Marvell 88PA6270_Rev. C1	SHA-1	A4138	Self-test (integrity)
RICOH Cryptographic Library 2 (Java), v1.0	Customized Linux 3.18 on ARM Cortex-A9 Quad Core	SHA-1 SHA-256 RSA Sig Ver 2048	C582	Trusted Update – SOP Software (Apps)
libseres, v1.0	Customized Linux 4.2.8 on Marvell 88PA6270	RSA Sig Ver 2048	A1326	Trusted Update - MFP
		SHA2-256		
RICOH Cryptographic Library C, v1.2	Customized Linux 3.18 on ARM Cortex-A9 Quad Core	ECDSA Sig Ver Curve P-256	C629	Trusted Update – SOP Software (system)
		SHA2-256		
wolfCrypt, v4.7.0i	Linux 4.2.8 on Marvell 88PA6270_Rev. C1 Cortex-A53	RSA Key Generation RSA Signature Generation (PKCS 1.5) RSA Signature Verification (PKCS 1.5)	A3028	TLS/HTTPS
		ECDSA		
		SHA-1, SHA2-256, SHA2-384, SHA2-512		
		AES-CBC AES-GCM		

Module	Operating Environment	Algorithms	CAVP	Usage
		Encryption/decryption Key length 128, 256		
		HMAC-SHA-1 HMAC-SHA2-256 HMAC-SHA2-384 HMAC-SHA2-512		
		Hash DRBG		
		KAS-ECC		
		KAS-FFC		

2.4.2 Excluded Features

- 14 The following features of the MFP are excluded from the evaluated configuration:
- a) **USB Port.** The MFP has a USB Port that is used to directly connect a client computer to the MFP for printing. This USB port is disabled during initial installation and configuration of the TOE.
 - b) **SD Card Slot.** The MFP has two SD Card Slots, one for customer engineers and one for users. The SD Card Slot for customer engineer is used by customer engineers to install components of the MFP; the SD Card Slot for users is used by users to print documents. Both are disabled when the TOE is operational, a cover is placed on the SD Card slot for customer engineer so cards cannot be inserted or removed and the card slot for users is set to disabled during installation.

2.4.3 Required non-TOE Components

- 15 The following non-TOE components are required in the TOE operational environment:
- a) **Syslog Server.** The TOE uses a remote syslog server for long term storage of its audit trail.
 - b) **NTP Server.** The TOE ensures accurate time by synchronizing with a remote NTP server.
 - c) **SMTP Server.** The TOE uses an SMTP server for email transmission.

3 Security Problem Definition

16 The Security Problem Definition is reproduced from section 2 of the HCDPP.

3.1 Users

17 There are two categories of Users defined in this ST, Normal and Admin.

Table 6: User Categories

Designation	Name	Definition
U.NORMAL	Normal User	A User who has been identified and authenticated and does not have an administrative role
U.ADMIN	Administrator	A User who has been identified and authenticated and has an administrative role

18 A pseudo-user role, Customer Engineer, can be enabled by an Administrator for use by an authorized service representative. It is normally disabled, as it is in the evaluated configuration.

3.2 Assets

19 Assets are passive entities in the TOE that contain or receive information. In this PP, Assets are Objects (as defined by the CC). There are two categories of Assets defined in this PP:

Table 7: Asset Categories

Designation	Asset category	Definition
D.USER	User Data	Data created by and for Users that do not affect the operation of the TSF
D.TSF	TSF Data	Data created by and for the TOE that might affect the operation of the TSF

20 There are no additional Asset categories defined in this ST.

3.2.1 User Data

21 User Data are composed of two types:

Table 8: User Data Types

Designation	User Data type	Definition
D.USER.DOC	User Document Data	Information contained in a User's Document, in electronic or hardcopy form
D.USER.JOB	User Job Data	Information related to a User's Document or Document Processing Job

22 There are no additional types of User Data defined in this ST. Attributes associate documents and document processing jobs with the document processing functions of the TOE:

Table 9: Document and Job Attributes

Document processing function	Attribute
Printing	+PRT
Copying	+CPY
Scanning	+SCN
Fax (reception)	+FAXIN
Fax (transmission)	+FAXOUT

3.2.2 TSF Data

23 TSF Data are composed of two types:

Table 10: TSF Data Types

Designation	TSF Data type	Definition
D.TSF.PROT	Protected TSF Data	TSF Data for which alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the TOE, but for which disclosure is acceptable
D.TSF.CONF	Confidential TSF Data	TSF Data for which either disclosure or alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the TOE

24 There are no additional types of TSF Data defined in this ST.

3.2.2.1 Protected TSF Data

25 D.TSF.PROT is composed of the following data:

- a) Username
- b) Number of Attempts before Lockout
- c) Settings for Lockout Release Timer
- d) Lockout time
- e) Date settings (year/month/day)
- f) Time settings
- g) Minimum Character No.
- h) Password Complexity Setting
- i) Operation Panel auto logout time
- j) WIM auto logout time

- k) Stored Reception File User
- l) Document user list
- m) Available function list
- n) User authentication method
- o) Device Certificate
- p) Network settings
- q) Audit transfer settings
- r) TOE Software

3.2.2.2 Confidential TSF Data

26 D.TSF.CONF is composed of the following data:

- a) Login password
- b) Audit log

3.3 Threats

27 The following threats are mitigated by this TOE:

Table 11: Threats

Identifier	Description
T.UNAUTHORIZED_ACCESS	An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE's interfaces.
T.TSF_COMPROMISE	An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE's interfaces.
T.TSF_FAILURE	A malfunction of the TSF may cause loss of security if the TOE is permitted to operate.
T.UNAUTHORIZED_UPDATE	An attacker may cause the installation of unauthorized software on the TOE.
T.NET_COMPROMISE	An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication.

3.4 Assumptions

28 The following assumptions must be satisfied in order for the Security Objectives and Security Functional Requirements to be effective:

Table 12: Assumptions

Identifier	Description
A.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment.
A.NETWORK	The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface.
A.TRUSTED_ADMIN	TOE Administrators are trusted to administer the TOE according to site security policies.
A.TRAINED_USERS	Authorized Users are trained to use the TOE according to site security policies.

3.5 Organizational Security Policies

29 The following Organizational Security Policies (OSPs) are enforced by this TOE:

Table 13: Organizational Security Policies

Identifier	Description
P.AUTHORIZATION	Users must be authorized before performing Document Processing and administrative functions.
P.AUDIT	Security-relevant activities must be audited and the log of such actions must be protected and transmitted to an External IT Entity.
P.COMMS_PROTECTION	The TOE must be able to identify itself to other devices on the LAN.
P.FAX_FLOW	If the TOE provides a PSTN fax function, it will ensure separation between the PSTN fax line and the LAN.

4 Security Objectives

30 The following Security Objectives are satisfied by this TOE:

Table 14: Security Objectives for the TOE

Identifier	Description
O.USER_I&A	The TOE shall perform identification and authentication of Users for operations that require access control, User authorization, or Administrator roles.
O.ACCESS_CONTROL	The TOE shall enforce access controls to protect User Data and TSF Data in accordance with security policies.

Identifier	Description
O.USER_AUTHORIZATION	The TOE shall perform authorization of Users in accordance with security policies.
O.ADMIN_ROLES	The TOE shall ensure that only authorized Administrators are permitted to perform administrator functions.
O.UPDATE_VERIFICATION	The TOE shall provide mechanisms to verify the authenticity of software updates.
O.TSF_SELF_TEST	The TOE shall test some subset of its security functionality to help ensure that subset is operating properly.
O.COMMS_PROTECTION	The TOE shall generate audit data, and be capable of sending it to a trusted External IT Entity. Optionally, it may store audit data in the TOE.
O.AUDIT	The TOE shall generate audit data, and be capable of sending it to a trusted External IT Entity. Optionally, it may store audit data in the TOE.
O.FAX_NET_SEPARATION	If the TOE provides a PSTN fax function, then the TOE shall ensure separation of the PSTN fax telephone line and the LAN, by system design or active security function.

31 The following Security Objectives must be satisfied by the TOE's Operational Environment.

Table 15: Security Objectives for the Operational Environment

Identifier	Description
OE.PHYSICAL_PROTECTION	The Operational Environment shall provide physical security, commensurate with the value of the TOE and the data it stores or processes.
OE.NETWORK PROTECTION	The Operational Environment shall provide network security to protect the TOE from direct, public access to its LAN interface.
OE.ADMIN_TRUST	The TOE Owner shall establish trust that Administrators will not use their privileges for malicious purposes.
OE.USER_TRAINING	The TOE Owner shall ensure that Users are aware of site security policies and have the competence to follow them.
OE.ADMIN_TRAINING	The TOE Owner shall ensure that Administrators are aware of site security policies and have the competence to use manufacturer's guidance to correctly configure the TOE and protect passwords and keys accordingly.

5 Security Requirements

5.1 Conventions

32 This document uses the following font conventions to identify the operations defined by the CC:

- c) **Assignment.** Indicated with italicized text.
- d) **Refinement.** Indicated with bold text and strikethroughs.
- e) **Selection.** Indicated with underlined text.
- f) **Assignment within a Selection:** Indicated with italicized and underlined text.
- g) **Iteration.** Indicated by adding letter in parentheses for iterations completed in the PP. Iterations completed in the ST are identified by adding a string starting “/” (e.g. “FCS_CKM.1(b)/DIM”

Note: operations performed within the Security Target are denoted within brackets []. Operations shown without brackets are reproduced from the HCDPP.

5.2 Extended Components Definition

2 Table 16 identifies the extended components used in this ST along with any related Technical Decisions. All extended components are drawn from the HCDPP.

Table 16: Extended Components

Extended Component	Technical Decisions
FAU_STG_EXT.1	
FCS_CKM_EXT.4	
FCS_HTTPS_EXT.1	
FCS_RBG_EXT.1	
FCS_TLS_EXT.1	TD0474
FDP_FXS_EXT.1	
FIA_PMG_EXT.1	
FPT_SKP_EXT.1	
FPT_TST_EXT.1	
FPT_TUD_EXT.1	

5.3 Functional Requirements

Table 17: Summary of SFRs

Requirement	Title
FAU_GEN.1	Audit Data Generation
FAU_GEN.2	User Identity Association
FAU_SAR.1	Audit Review
FAU_SAR.2	Restricted Audit Review
FAU_STG.1	Protected Audit Trail Storage
FAU_STG_EXT.1	Extended: External Audit Trail Storage
FAU_STG.4	Prevention of Audit Data Loss
FCS_CKM.1(a)	Cryptographic Key Generation (for asymmetric keys)
FCS_CKM.1(b)	Cryptographic Key Generation (for Symmetric keys)
FCS_CKM_EXT.4	Extended: Cryptographic Key Material Destruction
FCS_CKM.4	Cryptographic Key Destruction
FCS_COP.1(a)	Cryptographic Operation (Symmetric Encryption/Decryption)
FCS_COP.1(b)	Cryptographic Operation (Signature Generation and Verification)
FCS_COP.1(c)/L1	Cryptographic Operation (Hash Algorithm)
FCS_COP.1(c)/L2	Cryptographic Operation (Hash Algorithm)
FCS_COP.1(g)	Cryptographic Operation (for keyed-hash message authentication)
FCS_HTTPS_EXT.1	Extended: HTTPS selected
FCS_RBG_EXT.1	Extended: Cryptographic Operation (Random Bit Generation)
FCS_TLS_EXT.1	Extended: TLS selected
FDP_ACC.1	Subset Access Control
FDP_ACF.1	Security attribute based access control
FDP_FXS_EXT.1	Extended: Fax separation
FIA_AFL.1	Authentication Failure Handling

Requirement	Title
FIA_ATD.1	User attribute definition
FIA_PMG_EXT.1	Extended: Password Management
FIA_UAU.1	Timing of authentication
FIA_UAU.7	Protected Authentication Feedback
FIA_UID.1	Timing of identification
FIA_USB.1	User-subject binding
FMT_MOF.1	Management of security functions behavior
FMT_MSA.1	Management of security attributes
FMT_MSA.3	Static attribute initialization
FMT_MTD.1	Management of TSF Data
FMT_SMF.1	Specification of Management Functions
FMT_SMR.1	Security Roles
FPT_SKP_EXT.1	Extended: Protection of TSF Data
FPT_STM.1	Reliable Time Stamps
FPT_TST_EXT.1	Extended: TSF testing
FPT_TUD_EXT.1	Extended: Trusted update
FTA_SSL.3	TSF-initiated Termination
FTP_ITC.1	Inter-TSF trusted channel
FTP_TRP.1(a)	Trusted Path (for Administrators)
FTP_TRP.1(b)	Trusted Path (for Non-administrators)

5.3.1 Security Audit (FAU)

FAU_GEN.1 Audit Data Generation

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shutdown of the audit functions;
- b) All auditable events for the not specified level of audit;

- c) All auditable events specified in Table 18: Audit Events, [*no other auditable events*].

FAU_GEN.1.2

The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, **additional information specified in Table 18**, [*no other audit relevant information*].

Table 18: Audit Events

Auditable Event	Relevant SFR	Additional information
Job completion	FDP_ACF.1	Type of job
Unsuccessful User authentication	FIA_UAU.1	None
Unsuccessful User identification	FIA_UID.1	None
Use of management functions	FMT_SMF.1	None
Modification to the group of Users that are part of a role	FMT_SMR.1	None
Changes to the time	FPT_STM.1	None
Failure to establish session	FTP_ITC.1, FTP_TRP.1(a), FTP_TRP.1(b)	Reason for failure

FAU_GEN.2

User Identity Association

FAU_GEN.2.1

For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

FAU_SAR.1

Audit Review

FAU_SAR.1.1

The TSF shall provide [*U.ADMIN*] with the capability to read **all records** from the audit records.

FAU_SAR.1.2

The TSF shall provide the audit records in a manner suitable for the user to interpret the information.

FAU_SAR.2

Restricted Audit Review

FAU_SAR.2.1 The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.

FAU_STG.1 Protected Audit Trail Storage

FAU_STG.1.1 The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.

FAU_STG.1.2 The TSF shall be able to **prevent** unauthorised modifications to the stored audit records in the audit trail.

FAU_STG_EXT.1 Extended: External Audit Trail Storage

FAU_STG_EXT.1.1 The TSF shall be able to transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC.1.

FAU_STG.4 Prevention of Audit Data Loss

FAU_STG.4.1 Refinement The TSF shall [overwrite the oldest stored audit records] and [*no other actions*] if the audit trail is full.

5.3.2 Cryptographic Support (FCS)

FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys)

FCS_CKM.1.1(a) Refinement The TSF shall generate **asymmetric** cryptographic keys **used for key establishment** in accordance with [

- NIST Special Publication 800-56A, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” for finite field-based key establishment schemes;
- NIST Special Publication 800-56A, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” for elliptic curve-based key establishment schemes and implementing “NIST curves” P256, P-384 and [P-521] (as defined in FIPS PUB 186-4, “Digital Signature Standard”)

]

and specified cryptographic key sizes equivalent to, or greater than, a symmetric key strength of 112 bits.

Note: This SFR was altered by TD0642.

FCS_CKM.1(b) Cryptographic Key Generation (Symmetric keys)

FCS_CKM.1.1(b) Refinement The TSF shall generate **symmetric** cryptographic keys **using a Random Bit Generator as specified in FCS_RBG_EXT.1 and specified cryptographic key sizes [128 bit, 256 bit] that meet the following: No Standard.**

FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

FCS_CKM.4.1 Refinement The TSF shall destroy **all plaintext secret and private cryptographic keys and cryptographic critical security parameters** when no longer needed.

FCS_CKM.4 Cryptographic Key Destruction

FCS_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method [

- For volatile memory, the destruction shall be executed by a [removal of power to the memory];
- For non-volatile memory the destruction shall be executed by a [single] overwrite consisting of [a new value of a key of the same size];

] that meets the following: *No Standard*.

Application Note: This SFR is altered by TD0261.

FCS_COP.1(a) Cryptographic Operation (Symmetric Encryption/Decryption)

FCS_COP.1.1(a) Refinement The TSF shall perform **encryption and decryption** in accordance with a specified cryptographic algorithm **AES operating in [CBC mode, GCM mode]** and cryptographic key sizes **128-bits and 256-bits** that meets the following:

- **FIPS PUB 197, “Advanced Encryption Standard (AES)”**
- **[NIST SP 800-38A, NIST SP 800-38D]**

FCS_COP.1(b) Cryptographic Operation (for Signature Generation/Verification)

FCS_COP.1.1(b) Refinement The TSF shall perform **cryptographic signature services** in accordance with a [

- RSA Digital Signature Algorithm (rDSA) with key sizes (modulus) of [2048 bits]
- Elliptic Curve Digital Signature Algorithm (ECDSA) with key size of [256 bits or greater]

that meets the following: [

Case: RSA Digital Signature Algorithm:

- FIPS PUB 186-4, “Digital Signature Standard”

Case: ECDSA Digital Signature Algorithm:

- FIPS PUB 186-4, “Digital Signature Standard”
- The TSF shall implement “NIST curves” P-256, P384 and [P521] (as defined in FIPS PUB 186-4, “Digital Signature Standard”).]

Note: This SFR was altered by TD0642.

FCS_COP.1(c)/L1 Cryptographic Operation (Hash Algorithm)

FCS_COP.1.1(c) Refinement The TSF shall perform cryptographic hashing services in accordance with [**SHA-1**] that meet the following: [**ISO/IEC 10118-3:2004**].

FCS_COP.1(c)/L2 Cryptographic Operation (Hash Algorithm)

FCS_COP.1.1(c) Refinement The TSF shall perform cryptographic hashing services in accordance with [**SHA-256, SHA-384**] that meet the following: [**ISO/IEC 10118-3:2004**].

FCS_COP.1(g) Cryptographic Operation (for keyed-hash message authentication)

FCS_COP.1.1(g) Refinement The TSF shall perform **keyed-hash message authentication** in accordance with a specified cryptographic algorithm **HMAC-[SHA-256, SHA-384]**, key size [**64 (when using SHA-256), 128 (when using SHA-384)**], and message digest sizes [**256, 384**] bits that meet the following: **FIPS PUB 198-1, "The Keyed-Hash Message Authentication Code, and FIPS PUB 180-3, "Secure Hash Standard."**

FCS_HTTPS_EXT.1 Extended: HTTPS selected

FCS_HTTPS_EXT.1.1 The TSF shall implement the HTTPS protocol that complies with RFC 2818.

FCS_HTTPS_EXT.1.2 The TSF shall implement the HTTPS protocol using TLS as specified in FCS_TLS_EXT.1.

FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit Generation)

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with [**NIST SP 800-90A**] using [**Hash_DRBG (any SHA-256)**].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [**one(1) hardware-based noise source(s)**] with a minimum of [**256 bits**] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 "Security Strength Table for Hash Functions", of the keys and hashes that it will generate.

FCS_TLS_EXT.1 Extended: TLS selected

FCS_TLS_EXT.1.1 The TSF shall implement one or more of the following protocols [**TLS 1.2 (RFC 5246)**] supporting the following cipher suites:

[

- TLS_DHE_RSA_WITH_AES_128_CBC_SHA256
- TLS_DHE_RSA_WITH_AES_256_CBC_SHA256
- TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
- TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384
- TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
- TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384]

Application Note: This SFR is altered by TD0474

5.3.3 User Data Protection (FDP)

FDP_ACC.1 Subset access control

FDP_ACC.1.1 Refinement The TSF shall enforce the **User Data Access Control SFP** on subjects, objects, and operations among subjects and objects specified in **Table 2 and Table3** Table 19 and Table 20.

FDP_ACF.1 Security attribute based access control

FDP_ACF.1.1 Refinement The TSF shall enforce the **User Data Access Control SFP** to objects based on the following: subjects, objects, and attributes specified in **Table 2 and Table3** Table 19 and Table 20.

FDP_ACF.1.2 Refinement: The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects specified in Table 2 and Table3** Table 19 and Table 20.

FDP_ACF.1.3 Refinement: The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: *[no additional rules]*.

FDP_ACF.1.4 Refinement: The TSF shall explicitly deny access of subjects to objects based on the following additional rules: *[no additional rules]*.

Table 19: D.USER.DOC Access Control SFP

		"Create"	"Read"	"Modify"	"Delete"
Print (+PRT)	Operation:	Submit a document to be printed	View image or Release printed output	Modify stored document	Delete stored document
	Job owner	Allowed (note 1)	View: no function Release: allowed	No function	Allowed
	U.ADMIN	No function	View: no function	No function	Allowed

		"Create"	"Read"	"Modify"	"Delete"
			Release: no function		
	U.NORMAL	Allowed	Denied	Denied	Denied
	Unauthenticated	(condition 1)	Denied	Denied	Denied
Scan (+SCN)	Operation:	Submit a document for scanning	View scanned image	Modify stored image	Delete stored image
	Job owner	Allowed (note 2)	Allowed	No function	No function
	U.ADMIN	No function	No function	No function	No function
	U.NORMAL	Allowed	Denied	Denied (No function)	Denied (No function)
	Unauthenticated	Denied	Denied	Denied (No function)	Denied (No function)
Copy (+CPY)	Operation:	Submit a document for copying	View scanned image or Release printed copy output	Modify stored image	Delete stored image
	Job owner	Allowed (note 2)	View: no function Release: no function	No function	No function
	U.ADMIN	No function	View: no function Release: no function	No function	No function
	U.NORMAL	Allowed	Denied	Denied (No function)	Denied (No function)
	Unauthenticated	Denied	Denied	Denied (No function)	Denied (No function)
Fax send (+FAXOUT)	Operation:	Submit a document to send as a fax	View scanned image	Modify stored image	Delete stored image

		"Create"	"Read"	"Modify"	"Delete"
	Job owner	Allowed (note 2)	No function	No function	No function
	U.ADMIN	No function	No function	No function	No function
	U.NORMAL	Allowed	Denied	Denied (No function)	Denied (No function)
	Unauthenticated	Denied	Denied	Denied (No function)	Denied (No function)
Fax receive (+FAXIN)	Operation:	Receive a fax and store it	View fax image or Release printed fax output	Modify image of received fax	Delete image of received fax
	Fax owner	Allowed (note 3)	View: no function Release: allowed	No function	No function
	U.ADMIN	Allowed (note 4)	View: no function Release: no function	No function	No function
	U.NORMAL	Allowed (note 4)	Denied	Denied	Denied
	Unauthenticated	Allowed	Denied	Denied	Denied

Table 20: D.USER.JOB Access Control SFP

		"Create"	"Read"	"Modify"	"Delete"
Print (+PRT)	Operation:	Create print job	View print queue / log	Modify print job	Cancel print job
	Job owner	(note 1)	Allowed	No function	Allowed
	U.ADMIN	No function	Allowed	No function	Allowed
	U.NORMAL	Allowed	Allowed	Denied	Denied
	Unauthenticated	Denied	Allowed	Denied	Denied

		"Create"	"Read"	"Modify"	"Delete"
Scan (+SCN)	Operation:	Create scan job	View scan status / log	Modify scan job	Cancel scan job
	Job owner	(note 2)	Allowed	No function	Allowed
	U.ADMIN	No function	Allowed	No function	Allowed
	U.NORMAL	Allowed	Allowed	Denied	Denied
	Unauthenticated	Denied	Denied	Denied	Denied
Copy (+CPY)	Operation:	Create copy job	View copy status / log	Modify copy job	Cancel copy job
	Job owner	(note 2)	Allowed	No function	Allowed
	U.ADMIN	No function	Allowed	No function	Allowed
	U.NORMAL	Allowed	Allowed	Denied	Denied
	Unauthenticated	Denied	Denied	Denied	Denied
Fax send (+FAXOUT)	Operation:	Create fax send job	View fax job queue / log	Modify fax send job	Cancel fax send job
	Job owner	(note 2)	Allowed	No function	Allowed
	U.ADMIN	No function	Allowed	No function	Allowed
	U.NORMAL	Allowed	Allowed	Denied	Denied
	Unauthenticated	Denied	Denied	Denied	Denied
Fax receive (+FAXIN)	Operation:	Create fax receive job	View fax receive status / log	Modify fax receive job	Cancel fax receive job
	Fax owner	(note 3)	Allowed	No function	No function
	U.ADMIN	(note 4)	Allowed	No function	No function
	U.NORMAL	(note 4)	Allowed	Denied	Denied
	Unauthenticated	Allowed	Denied	Denied	Denied

Application notes:

Condition 1: Jobs submitted by unauthenticated users must contain a credential that the TOE can use to identify the Job Owner.

See also the following Notes that are referenced in **Table 2 and Table 3** Table 19 **and** Table 20.

Note 1: Job Owner is identified by a credential or assigned to an authorized User as part of the process of submitting a print or storage Job.

Note 2: Job Owner is assigned to an authorized User as part of the process of initiating a scan, copy, fax send, or retrieval Job.

Note 3: Job Owner of received faxes is assigned by default or configuration. Minimally, ownership of received faxes is assigned to a specific user or U.ADMIN role.

Note 4: PSTN faxes are received from outside of the TOE, they are not initiated by Users of the TOE.

FDP_FXS_EXT.1 Extended: Fax separation

FDP_FXS_EXT.1.1 The TSF shall prohibit communication via the fax interface, except transmitting or receiving User Data using fax protocols.

5.3.4 Identification and Authentication (FIA)

FIA_AFL.1 Authentication Failure Handling

FIA_AFL.1.1 The TSF shall detect when [an administrator configurable positive integer within [1 to 10]] unsuccessful authentication attempts occur related to [

- User authentication using the Operation Panel
- User authentication using WIM from the client computer
- User authentication when printing from the client computer
- User authentication when using LAN Fax from the client computer].

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been [met], the TSF shall [lock the user account for an administrator configurable time period, or until an administrator unlocks the account.].

Application Note: This SFR applies only to internal identification and authentication.

FIA_ATD.1 User attribute definition

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users: [*Username, User Role, Available Functions List*]

FIA_PMG_EXT.1 Extended: Password Management

FIA_PMG_EXT.1.1 The TSF shall provide the following password management capabilities for User passwords:

- a) Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special

characters: ["!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", "[", "]", "+", " ",
 "-", "/", ".", "<", "=", ">", "?", "\\", "|", ";", ":", "{", "}", "~", " "];

- b) Minimum password length shall be settable by an Administrator, and have the capability to require passwords of 15 characters or greater;

FIA_UAU.1 Timing of authentication

FIA_UAU.1.1 Refinement The TSF shall allow [*the viewing of the list of user jobs, WIM Help, system status, counter and information of inquiries, and creation of fax reception and print jobs*] on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

FIA_UAU.7 Protected Authentication Feedback

FIA_UAU.7.1 The TSF shall provide only [*displaying dummy characters as authentication feedback on the Operation Panel and through WIM*] to the user while the authentication is in progress.

FIA_UID.1 Timing of identification

FIA_UID.1.1 Refinement The TSF shall allow [*the viewing of the list of user jobs, WIM Help, system status, counter and information of inquiries, creation of fax reception jobs, and creation of print jobs*] on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

FIA_USB.1 User-subject binding

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [*username, available function list, and user role*].

FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users: [*an Available functions list is associated with the user after the user is authenticated, and the set of available functions does not change during the user session.*]

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: [*none*].

5.3.5 Security Management (FMT)

FMT_MOF.1 Management of security functions behavior

FMT_MOF.1.1 Refinement The TSF shall restrict the ability to determine the behaviour of, disable, enable, modify the behaviour of the functions [listed in Table 21] to **U.ADMIN**.

FMT_MSA.1 Management of security attributes

FMT_MSA.1.1 Refinement The TSF shall enforce the **User Data Access Control SFP** to restrict the ability to query, modify the security attributes [*username, available function list, user role*] to [*U.ADMIN*].

FMT_MSA.3 Static attribute initialization

FMT_MSA.3.1 Refinement The TSF shall enforce the **User Data Access Control SFP** to provide permissive default values for security attributes that are used to enforce the SFP.

FMT_MSA.3.2 Refinement The TSF shall allow the **U.ADMIN** to specify alternative initial values to override the default values when an object or information is created.

FMT_MTD.1 Management of TSF data

FMT_MTD.1.1 Refinement The TSF shall restrict the ability to **perform the specified operations on the specified TSF Data to the roles specified in Table 4 Table 21**

Table 21: Management of TSF Data

Data	Operation	Interfaces	Authorized Role(s)
<i>TSF Data owned by U.NORMAL or associated with documents or jobs owned by U.NORMAL.</i>			
<i>Login password for authenticated user</i>	<u>Modify</u>	Operation Panel, WIM	The Owing U.NORMAL or U.ADMIN
<i>TSF Data not owned by a U.NORMAL</i>			
<i>Audit Logs</i>	<u>Delete, export</u>	WIM	U.ADMIN
<i>Login passwords of U.ADMIN user</i>	Modify	Operation Panel, WIM	U.ADMIN
<i>Username, user role, available function list or access permissions of U.NORMAL Users</i>	<u>Modify</u>	Operation Panel, WIM	U.ADMIN
<i>Software, firmware, and related configuration data</i>			
<i>Audit Transfer Settings</i>	<u>Modify</u>	Operation Panel, WIM	U.ADMIN

Data	Operation	Interfaces	Authorized Role(s)
<i>Date & Time Settings</i>	<u>Modify</u>	WIM	U.ADMIN
<i>Password Length and Password complexity settings</i>	<u>Modify</u>	Operation Panel, WIM	U.ADMIN
<i>Operation Panel Auto logout settings</i>	<u>Modify</u>	Operation Panel, WIM	U.ADMIN
<i>WIM Auto logout settings</i>	<u>Modify</u>	WIM	U.ADMIN
<i>PSTN Fax-Line Separation - Stored Reception File User</i>	Modify	Operation Panel	U.ADMIN
<i>Device Certificate</i>	<u>Create, Query, Modify, Delete</u>	WIM	U.ADMIN
<i>TOE Software updates</i>	<u>Modify</u>	WIM	U.ADMIN
<i>Network settings for trusted communication</i>	<u>Modify</u>	Operation Panel, WIM	U.ADMIN

FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1 Refinement The TSF shall be capable of performing the following management functions: [*management functions listed in Table 22*].

Table 22: Management Functions

Management Functions	Operation	Interface(s)
Manage user accounts (users, roles, privileges and available functions list)	Create, modify, delete	Operation Panel, WIM
Configure audit transfer settings	Modify	WIM
Manage audit logs	Delete, export	Operation Panel, WIM
Manage Audit Functions	Enable, Disable	Operation Panel, WIM
Manage time and date settings	Modify	Operation Panel, WIM
Configure minimum password length	Modify	Operation Panel, WIM

Management Functions	Operation	Interface(s)
Configure Password complexity settings	Modify	Operation Panel, WIM
Configure Operation Panel Auto Logout Time	Modify	Operation Panel, WIM
Configure WIM Auto Logout Time	Modify	WIM
Configure number of authentication failure before account lockout	Modify	WIM
Configure account release timer settings	Modify	WIM
Configure PSTN Fax-Line Separation Stored Reception File User	Modify	Operation Panel, WIM
Configure network settings for trusted communications (specify IP addresses and port to connect to the TOE)	Modify	Operation Panel, WIM
Manage Device Certificates	Create, query, modify, delete, upload	Operation Panel, WIM
Manage TOE Trusted Update	Query, Modify	WIM
Configure SMTP	Modify	WIM
Configure syslog over TLS	Modify	WIM
Configure NTP	Modify	WIM
Manage user accounts (Ability to login)	Unlock	WIM

FMT_SMR.1 Security Roles

FMT_SMR.1.1 Refinement The TSF shall maintain the roles **U.ADMIN, U.NORMAL**.

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

5.3.6 Protection of the TSF (FPT)

FPT_SKP_EXT.1 Extended: Protection of TSF Data

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

FPT_STM.1 Reliable Time Stamps

FPT_STM.1.1	The TSF shall be able to provide reliable time stamps.
FPT_TST_EXT.1	Extended: TSF testing
FPT_TST_EXT.1.1	The TSF shall run a suite of the following self-tests during initial start-up (and power on) to demonstrate the correct operation of the TSF.
FPT_TUD_EXT.1	Extended: Trusted update
FPT_TUD_EXT.1.1	The TSF shall provide authorized administrators the ability to query the current version of the TOE firmware/software.
FPT_TUD_EXT.1.2	The TSF shall provide authorized administrators the ability to initiate updates to TOE firmware/software.
FPT_TUD_EXT.1.3	The TSF shall provide a means to verify firmware/software updates to the TOE using a digital signature mechanism and <u>[no other functions]</u> prior to installing those updates.

5.3.7 TOE Access (FTA)

FTA_SSL.3 TSF-initiated Termination

FTA_SSL.3.1	The TSF shall terminate interactive session after a <i>[lapse of Operation Panel auto logout time, lapse of WIM auto logout time, completion of document data reception from the printer driver, and completion of document data reception from the fax driver]</i> .
-------------	---

5.3.8 Trusted path/channels (FTP)

FTP_ITC.1 Inter-TSF trusted channel

FTP_ITC.1.1	Refinement The TSF shall use [TLS] to provide a trusted communication channel between itself and authorized IT entities supporting the following capabilities: <u>[syslog, SMTP]</u> that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from disclosure and detection of modification of the channel data .
FTP_ITC.1.2	Refinement The TSF shall permit the TSF, or the authorized IT entities , to initiate communication via the trusted channel.
FTP_ITC.1.3	Refinement The TSF shall initiate communication via the trusted channel for <i>[communication via the LAN of document data, function data, protected data, and confidential data]</i> .

FTP_TRP.1(a) Trusted Path (for Administrators)

FTP_TRP.1.1(a)	Refinement The TSF shall use [TLS/HTTPS] to provide a trusted communication path between itself and remote administrators that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data
----------------	---

from **disclosure and detection of modification of the communicated data.**

FTP_TRP.1.2(a) Refinement The TSF shall permit **remote administrators** to initiate communication via the trusted path.

FTP_TRP.1.3(a) Refinement The TSF shall require the use of the trusted path for **initial administrator authentication and all remote administration actions.**

FTP_TRP.1(b) Trusted Path (for Non-administrators)

FTP_TRP.1.1(b) Refinement The TSF shall use **[TLS/HTTPS]** to provide a **trusted** communication path between itself and remote users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from **disclosure and detection of modification of the communicated data.**

FTP_TRP.1.2(b) Refinement The TSF shall permit [the TSF, remote users] to initiate communication via the trusted path.

FTP_TRP.1.3(b) Refinement The TSF shall require the use of the trusted path for **initial user authentication and all remote actions.**

5.4 Assurance Requirements

33 The TOE security assurance requirements are summarized in Table 23. See Annex B for Security Assurance Requirements description.

Table 23: TOE Security Assurance Requirements

Assurance Class	Components	Description
Security Target Evaluation	ASE_CCL.1	Conformance Claims
	ASE_ECD.1	Extended Components Definition
	ASE_INT.1	ST Introduction
	ASE_OBJ.1	Security Objectives for the operational environment
	ASE_REQ.1	Stated Security Requirements
	ASE_SPD.1	Security Problem Definition
	ASE_TSS.1	TOE Summary Specification
Development	ADV_FSP.1	Basic Functional Specification
Guidance Documents	AGD_OPE.1	Operational User Guidance
	AGD_PRE.1	Preparative procedures
Life Cycle Support	ALC_CMC.1	Labelling of the TOE
	ALC_CMS.1	TOE CM Coverage
Tests	ATE_IND.1	Independent Testing - conformance
Vulnerability Assessment	AVA_VAN.1	Vulnerability survey

6 TOE Summary Specification

34 The following describes how the TOE fulfils each SFR included in section 5.3.

6.1 Security Audit

6.1.1 FAU_GEN.1 & FAU_GEN.2

35 The TOE records an audit log of events listed in Table 24. Audit log entries record the date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event. Additionally, Job Completion events record the type of job, and Failure to Establish Session events record the reason for such failure.

Table 24: List of Audit Events

Auditable event requirements	Auditable events satisfied
Start-up and shutdown of the audit functions	Start-up of the Audit Function
	Shutdown of the Audit Function
Job completion	Printing via networks
	LAN Fax via networks
	Scanning documents
	Copying documents
	Receiving incoming faxes
	Reading document data (print, fax transmission)
	Deleting document data
Unsuccessful User authentication, Unsuccessful User identification	Failure of login operations
Use of management functions	Use of functions identified in FMT_SMF.1
Modification to the group of Users that are part of a role	Modification of MFP Administrator roles
Changes to the time	Date settings (year/month/day), time settings (hour/minute)
Failure to establish session	Failure of communication with the audit server
	Failure of communication with print driver

Auditable event requirements	Auditable events satisfied
	Failure of communication with fax driver
	Failure of communication with WIM

6.1.2 FAU_STG.1, FAU_STG_EXT.1, FAU_STG.4, FAU_SAR.1, FAU_SAR.2 and FTP_ITC.1

- 36 The TOE stores audit log data in a dedicated storage area of the eMMC. Audit records are buffered in that storage area before transfer to a configured remote syslog server over a configured TLS trusted channel.
- 37 Authorized administrators use the WIM to review the audit trail and to initiate transfer of audit records. The TOE prevents unauthorized access to the audit records by ensuring that the options to manage the audit function and the audit records are not included in the lists of available functions visible to the U.NORMAL users.
- 38 The TOE audit trail comprises three types of audit logs: Job logs, Access logs, and Ecology logs. By default, the job and ecology logs will each hold a maximum of 4,000 records; the access log can have a maximum of 12,000 records. When a maximum number of records is reached, the records are overwritten based on the following criteria:
 - a) When syslog audit transfers are working, the oldest records which have been transferred to the syslog server are overwritten first.
 - b) If none of the logs have been transferred to the audit server, the oldest records are overwritten first.

6.2 Identification and Authentication

6.2.1 FIA_UAU.1, FIA_UID.1, FIA_UAU.7, FIA_ATD.1 & FIA_USB.1

- 39 For each individual user, the TOE maintains the user attributes: username, password, user role and available functions list regardless of the authentication method for the user account. Users login to the TOE by entering their username/password credentials on the Operation Panel, the WIM login screen, or through a client's print driver or fax driver that has been configured to submit user credentials.
- 40 When users enter their passwords on the Operation Panel or the WIM login, the TOE displays a sequence of dummy characters whose length is the same as that of the entered password.
- 41 All users accessing the TOE user interfaces are identified and authenticated before they are allowed access. Only the following functions are accessible before the user is authenticated:
 - a) Viewing user job lists, WIM Help, system status, the counter and information of inquiries.
 - b) Creation of fax reception jobs.
 - c) Creation of print jobs

42 The TOE authenticates users by checking the entered username/passwords credentials against the local user database.

43 An available functions list that identifies the basic hardcopy functions a user is permitted to perform is associated with each Normal User. After successful login, users are authorized to perform functions according to their assigned user role (Normal User, MFP Administrator, or MFP Supervisor). If login fails, the user is not denied access to all functions that require user authentication.

6.2.2 FIA_PMG_EXT.1

44 For authentication within the TOE, login passwords for users can be registered only if these passwords meet the conditions specified by the selections in FIA_PMG_EXT.1.

6.2.3 FIA_AFL.1 & FTA_SSL.3

45 The TOE counts consecutive login failures for a given login name and locks out that user after an administrator-configured number of authentication failures attempts have been reached. For the U.NORMAL users, the account lockout is released when the configured lockout time has elapsed or by direct release operation performed by the MFP administrator. For the U.ADMIN users, the account lockout is released when the configured lockout time has elapsed, or by direct release operation performed by the MFP Administrator or MFP Supervisor, or by elapse of a given time after the TOE restarts.

46 The TOE can terminate user sessions at the various interfaces as follow:

- h) **Operation Panel:** the user is logged out of the TOE when inactivity reaches the Operation Panel auto logout time (settable from 10 to 999 seconds).
- i) **WIM:** the user is logged out of the TOE when inactivity reaches the WIM auto logout time (settable from 3 to 60 minutes).
- j) **Printer driver:** the user is logged out of the TOE immediately after receiving the print data from the printer driver.
- k) **Fax driver:** the user is logged out of the TOE immediately after receiving the transmission information from the fax driver.

6.3 Access Control

6.3.1 FDP_ACC.1 & FDP_ACF.1

47 The TOE controls user operations for document data and user jobs as specified in Table 19 and Table 20.

6.3.1.1 Access control rule on document data

48 The TOE provides users with the ability to perform operations on document data that are stored in the TOE.

49 Normal Users are permitted to operate on document data if the ID of the user corresponds to the Document User List for that document (i.e., the user is the "Job Owner"). A Normal User is not permitted to operate on document data for which it is not the Job Owner.

50 A Normal User who is a Job Owner may print, send by fax, send by e-mail as attachments, and delete stored documents, using the Operation Panel or a web browser.

- 51 The TOE allows only the Job Owner to view and delete the document data handled as a user job while Printer Function is being used.
- 52 While no interface to change job owners is provided, an interface to cancel user jobs is provided. If a user job is cancelled, any document the cancelled job operates will be deleted.

Table 25: Stored Documents Access Control Rules for Normal Users

Function	User interface	Type of document	Operations permitted for authorized users
Printer	Operation Panel	+PRT	Print Delete
Printer	Web browser	+PRT	Delete
Scanner	Operation Panel	+SCN	E-mail transmission
Fax	Operation Panel	+FAXIN	Print Delete

- 53 MFP Administrators are not permitted to print, download, or send stored documents. MFP Administrators may delete stored documents, using the Operation Panel, web browser, or indirectly by cancelling a job.
- 54 The MFP Supervisor is not permitted to perform any document operations.

6.3.1.2 Access control rule on user jobs

- 55 The TOE displays on the Operation Panel a menu to cancel a user job only if the user who logs in from the Operation Panel is a Job Owner or MFP Administrator and a cancellation of a user job is attempted by the Job Owner or an MFP Administrator. Other users are not allowed to operate user jobs.
- 56 When a user job is cancelled, any documents operated by the cancelled job will be deleted. However, if the document data operated by the cancelled user job is a stored document, the data will not be deleted and remain stored in the TOE.

6.4 Cryptographic Operations

6.4.1 FCS_CKM.1(a), FCS_CKM.1(b), FCS_RBG_EXT.1.

- 57 The TOE implements random-bit generation services using a software based DRBG that has been seeded with at least 256-bits of entropy from a third-party hardware-based TRNG and DRBG.

Table 26: Random Number Sources

RNG	Method	Standard	RNG
Hardware TRNG	True RNG + DRBG	AIS31 Class 2	Hardware TRNG
Software DRBG	Hash_DRBG_SH A256	SP 800-90A	Software DRBG

The TOE generates the following cryptographic keys in support of secure communications:

- a) RSA 2048
- b) ECDHE P-256, P-384 and P-521.
- c) 128-bit and 256-bit symmetric keys

58 Additional details about key creation, the TRNG, and the DRBG, are provided in the Key Management Description and Entropy Description documents.

6.4.2 FPT_SKP_EXT.1, FCS_CKM.4 and FCS_CKM_EXT.4

59 The TOE prevents reading of all symmetric and private keys. It does not make use of pre-shared keys.

60 The TOE destroys cryptographic keys and key materials when no longer needed. TLS session keys are no longer needed at the end of a communication session. Private keys are no longer needed when a new certificate replaces the current device certificate.

61 Key destruction is further described in the separate proprietary Key Management Document (KMD).

6.5 Protection of the TSF

6.5.1 FPT_STM.1

62 The date (year/month/day) and time (hour/minute/second) the TOE records for the audit log are derived from the system clock of the TOE. The system clock is also used for other time-related functions, including user lockout timing, idle session timeouts, and SA lifetimes.

63 The system clock may be set locally or configured to use a network time server. Only an MFP Administrator can configure the system clock.

6.6 Trusted Communications

64 The Trusted Communications Function provides trusted paths for communications between the TOE and remote users / external IT entities.

6.6.1 FTP_TRP.1 (a), FTP_TRP.1 (b), FCS_HTTPS_EXT.1, FTP_ITC.1, and FCS_TLS_EXT.1

65 The TOE implements TLS 1.2 to protect communications between the TOE and remote users' client computers (print drivers, fax drivers, and WIM HTTPS sessions). TLS client authentication is not supported. The TOE can also be configured at initial configuration to use TLS to protect communications with a remote Syslog or SMTP server.

66 The TOE supports these ciphersuites:

- a) TLS_DHE_RSA_WITH_AES_128_CBC_SHA256
- b) TLS_DHE_RSA_WITH_AES_256_CBC_SHA256
- c) TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
- d) TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384
- e) TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256

f) TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384

6.6.2 FCS_COP.1 (a), FCS_COP.1(b), FCS_COP.1(c), and FCS_COP.1(g)

67 The TOE generates a self-signed RSA Device Certificate. Administrators may import a Device Certificate that is generated outside of the TOE.

68 To establish a session key for TLS communications, the TOE employs a Diffie-Hellman-based key establishment scheme conforming to NIST SP 800-56A Section 5.6, and a Hash DRBG. The session key is used to encrypt communications with AES 128 or AES 256 CBC:

Table 27: TLS/HTTPS Cryptographic Functions

Function	SFR	Algorithm
Authentication	n/a	RSA KeyGen 186-4
Key establishment	FCS_CKM.1(a)	DSA KeyGen 186-4 KAS-FFC (DHE) KAS-ECC (ECDHE)
Random number generation	FCS_RBG_EXT.1	Hash_DRBG_SHA256
Encryption / decryption	FCS_COP.1(a)	AES 128 CBC AES 256 CBC AES 128 GCM AES 256 GCM
Hashing	FCS_COP.1(c)/L2 FCS_COP.1(g)	HMAC-SHA2-256 HMAC-SHA2-384

6.7 Administrative Roles

69 The Security Management Function consists of functions to 1) control operations for TSF data, 2) maintain user roles assigned to Normal Users, MFP Administrator, or MFP Supervisor to operate the Security Management Function, and 3) set appropriate default values to security attributes, all of which accord with user role privileges or user privileges that are assigned to Normal Users, MFP Administrator, or MFP Supervisor.

6.7.1 FMT_SMR.1

70 The TOE maintains U.NORMAL and U.ADMIN roles as described in Table 6. U.NORMAL defines the normal or non-admin users of the TOE which are permitted to use the document processing functions of the MFP and access their own data. U.ADMIN defines All TOE administrators w which includes the MFP Administrator and the MFP Supervisor. The MFP Administrator configures the TOE, manages normal users' jobs and normal users' data. The MFP supervisor sets MFP Administrators' passwords. Administrators do not initiate document processing jobs.

6.7.2 FMT_SMF.1, FMT_MOF.1, and FMT_MTD.1

- 71 The TOE provides and restricts the following management functions which can be managed over the Operation Panel or the WIM:
- a) Manage user accounts including create, modify, delete users, user roles, privileges, available function lists.
 - b) Manage the audit functions including enable/disable the audit functions and modifying the audit transfer settings
 - c) Query, delete and export the audit logs
 - d) Configure time and date settings
 - e) Password Management including configuring password composition, password length, and password complexity
 - f) Configure auto logout settings on WIM and the Operation Panel
 - g) Configure Authentication Failure and Account lockout timer settings
 - h) Modify PSTN Fax-Line Separation Stored Reception File User
 - i) Configure network settings for trusted communications (specify IP addresses and port to connect to the TOE)
 - j) Manage device certificates including create, query, delete, modify, upload certificates
 - k) Manage TOE trusted update
 - l) Configure NTP
 - m) Configure SMTP
 - n) Configure syslog over TLS
- 72 The TOE restricts modification of TSF functions and TSF data to the authorized administrator roles.

6.7.3 FMT_MSA.1 and FMT_MSA.3

- 73 Table 18 and Table 19 list the access control rules enforced by the TOE when users access the document processing functions (print, scan, copy, fax) and individual user jobs. The default behaviour to access the document data is permissive for all authenticated normal users, except for the U.ADMIN user which cannot initiate document processing functions. The TOE maintains username and available function lists data for individual users, unauthenticated users sending document print or document fax to the TOE must be identified before the TOE processes the job.

6.8 Trusted Operation

- 74 The Software Verification Function is to verify the integrity of the executable codes of the MFP Control Software, FCU Control Software and Operation Panel Control Software, and confirm that these codes can be trusted.

6.8.1 FPT_TST_EXT.1, FCS_COP.1(b), FCS_COP.1(c)/L1, and FCS_COP.1(c)/L2

- 75 During start-up, the TOE performs a series of integrity tests, that check that the hash on the executable files is correct and that the software has not been changed. The integrity tests check the hash on the software executable listed below:

Table 28: Start-up Integrity Tests

Integrity test	SFR	Algorithm
TPM	FCS_COP.1(c)/L1	SHA-1
MFP Control Software	FCS_COP.1(b) FCS_COP.1(c)/L2	RSA 186-4 SHA-256
Fax Control Unit	FCS_COP.1(c)/L1	SHA-1
Operation Panel Software	FCS_COP.1(b) FCS_COP.1(c)/L1	RSA 186-4 SHA-1
Operation Panel Applications	FCS_COP.1(b) FCS_COP.1(c)/L1	RSA 186-4 SHA-1

76 If any steps of the integrity tests fail, a Service Call (SC) error code is displayed on the Operator Panel and the TOE becomes unavailable. In such cases, the Administrator must contact a Customer Engineer to service the TOE.

77 When all steps succeed, the TOE becomes operational.

78 Testing that the hash on the TOE software image is correct before the TOE can become operational verifies the integrity and validity of the TOE software; this is sufficient to demonstrate that the TSF is operating correctly.

6.8.2 FPT_TUD_EXT.1, FCS_COP.1(b), FCS_COP.1(c)/L1, and FCS_COP.1(c)/L2

79 TOE allows only the MFP Administrator to read the version of the MFP Control Software, Operation Panel Control Software, and FCU Control Software. The MFP Administrator can read these versions using the Operation Panel or WIM from the client computer.

80 The MFP Administrator can prepare for installation of updated MFP Control Software, Operation Panel Software, or FCU Control Software, by uploading an installation package from the client computer using WIM. The package contains the TOE Software and a digital signature (DS) that was created using the SERES private key. Digital signatures for trusted updates are generated outside of the TOE, by the manufacturer.

81 For MFP Control or FCU Software, the TOE performs the following verifications before the installing the package:

- a) Identifies the type of software (e.g., MFP Control, Operation Panel, FCU);
- b) Verifies that the software model name matches the TOE;
- c) Creates a SHA256 message digest (MD1) of the software, uses the SERES public key to decrypt DS (MD2), and then verifies that MD1 = MD2.

82 For Operation Panel software, the TOE performs the following verifications before the installing the package:

- a) Identifies the type of software (e.g., MFP Control, Operation Panel, FCU);
- b) Verifies that the software model name matches the TOE;

- c) Creates a SHA256 message digest (MD1) of the index file, uses the SERES public key to decrypt DS (MD2), and then verifies that MD1 = MD2.
- d) Creates a SHA256 message digest (MD3) of the software image, uses an internal key to decrypt DS (MD4), and then verifies that MD3 = MD4.

83 The TOE performs the signature verification of the software to be updated using the encryption functions listed below when updating the software.

Table 29: Signature Verification

Integrity test	SFR	Algorithm
MFP Control Software	FCS_COP.1(b)	RSA 186-4
	FCS_COP.1(c)/L2	SHA-256
Operation Panel Software	FCS_COP.1(b)	ECDSA SigVer 186-4
	FCS_COP.1(c)/L2	SHA-256
Operation Panel Applications	FCS_COP.1(b)	RSA 186-4
	FCS_COP.1(c)/L2	ECDSA SigVer 186-4
		SHA-256

6.9 PSTN Fax-Network Separation

84 The Fax Line Separation Function permits only fax transmissions as input information from telephone lines so that unauthorized intrusion from telephone lines can be prevented.

6.9.1 FDP_FXS_EXT.1

85 The fax interface use cases are below.

- a) Sending faxes
 - i) The TOE receives documents from client PCs via the LAN, and using the fax interface, transmits them as fax documents via the PSTN line using the ITU-T T.30 protocol.
 - ii) The TOE can transmit stored documents as faxes.
- b) Receiving faxes
 - i) A remote fax machine establishes a connection to the TOE through the PSTN line using the ITU-T T.30 protocol, through which the TOE receives fax documents.
- c) Fax-Line Separation
 - i) The fax modem accepts connections through the PSTN only if they conform to the ITU-T T.30 protocol.
 - ii) Data that is transmitted or received through the PSTN is fax-format, image data.

86 Other than the specified use cases, the TOE allows no other data to be transmitted on the fax line.

7 Rationale

7.1 Conformance Claim Rationale

87 The following rationale is presented with regard to the PP conformance claims:

- a) **TOE type.** As identified in section 2.1, the TOE is hardcopy device, consistent with the HCDPP.
- b) **Security problem definition.** As shown in section 3, the threats, OSPs and assumptions are reproduced directly from the HCDPP.
- c) **Security objectives.** As shown in section 4, the security objectives are reproduced directly from the HCDPP.
- d) **Security requirements.** As shown in section 5, the security requirements are reproduced directly from the HCDPP. No additional requirements have been specified.

7.2 Security Objectives Rationale

88 The following table maps threats, OSPs, and assumptions, to their respective Security Objectives.

Table 30: Security Objectives Rationale

Threat/Policy/Assumptions	Rationale
<p>T.UNAUTHORIZED_ACCESS An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE’s interfaces.</p>	<p>O.ACCESS_CONTROL restricts access to User Data in the TOE to authorized Users.</p> <p>O.USER_I&A provides the basis for access control.</p> <p>O.ADMIN_ROLES restricts the ability to authorize Users and set access controls to authorized Administrators.</p>
<p>T.TSF_COMPROMISE An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE’s interfaces.</p>	<p>O.ACCESS_CONTROL restricts access to TSF Data in the TOE to authorized Users.</p> <p>O.USER_I&A provides the basis for access control.</p> <p>O.ADMIN_ROLES restricts the ability to authorize Users and set access controls to authorized Administrators.</p>
<p>T.TSF_FAILURE A malfunction of the TSF may cause loss of security if the TOE is permitted to operate.</p>	<p>O.TSF_SELF_TEST prevents the TOE from operating if a malfunction is detected.</p>
<p>T.UNAUTHORIZED_UPDATE An attacker may cause the installation of unauthorized software on the TOE.</p>	<p>O.UPDATE_VERIFICATION verifies the authenticity of software updates.</p>

Threat/Policy/Assumptions	Rationale
<p>T.NET_COMPROMISE</p> <p>An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication.</p>	<p>O.COMMS_PROTECTION protects LAN communications from sniffing, replay, and man-in-the-middle attacks.</p>
<p>P.AUTHORIZATION</p> <p>Users must be authorized before performing Document Processing and administrative functions.</p>	<p>O.USER_AUTHORIZATION restricts the ability to perform Document Processing and administrative functions to authorized Users.</p> <p>O.USER_I&A provides the basis for authorization.</p> <p>O.ADMIN_ROLES restricts the ability to authorize Users to authorized Administrators.</p>
<p>P.AUDIT</p> <p>Security-relevant activities must be audited and the log of such actions must be protected and transmitted to an External IT Entity.</p>	<p>O.AUDIT requires the generation of audit data.</p> <p>O.ACCESS_CONTROL restricts access to audit data in the TOE to authorized Users.</p> <p>O.USER_AUTHORIZATION provides the basis for authorization.</p>
<p>P.COMMS_PROTECTION</p> <p>The TOE must be able to identify itself to other devices on the LAN.</p>	<p>O.COMMS_PROTECTION protects LAN communications from man-in-the-middle attacks.</p>
<p>P.FAX_FLOW (conditionally mandatory)</p> <p>If the TOE provides a PSTN fax function, it will ensure separation between the PSTN fax line and the LAN.</p>	<p>O.FAX_NET_SEPARATION requires a separation between the PSTN fax line and the LAN.</p>
<p>A.PHYSICAL</p> <p>Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment.</p>	<p>OE.PHYSICAL_PROTECTION establishes a protected physical environment for the TOE.</p>
<p>A.NETWORK</p> <p>The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface.</p>	<p>OE.NETWORK_PROTECTION establishes a protected LAN environment for the TOE.</p>
<p>A.TRUSTED_ADMIN</p> <p>TOE Administrators are trusted to administer the TOE according to site security policies.</p>	<p>OE.ADMIN_TRUST establishes responsibility of the TOE Owner to have a trusted relationship with Administrators.</p>

7.3 Security Assurance Requirements rationale

The rationale for choosing these security assurance requirements is that they define a minimum security baseline that is based on the anticipated threat level of the attacker, the security of the Operational Environment in which the TOE is deployed, and the relative value of the TOE itself. The assurance activities throughout the PP are used to provide tailored guidance on the specific expectations for completing the security assurance requirements.