



March 4, 2021 KYOCERA Document Solutions Inc.

© 2021 KYOCERA Document Solutions Inc.

- History of Revisions-

Date	Version	Detail
2019-08-02	0.90	First release
2020-02-06	0.91	Modified for corresponding ORs.
2020-05-18	0.92	Modified for corresponding ORs.
2020-05-21	0.93	Modified for corresponding ORs.
2020-06-12	0.94	Modified for corresponding ORs.
2020-11-11	0.95	Modified for corresponding ORs.
2021-03-04	1.00	Modified for corresponding ORs.

#### Table of Contents

1. S <sup>-</sup>	ΓInt	roduction	. 1
1.1.	ST Re	eference	1
1.2.	TOE	Reference	.1
1.3.	TOE	Overview	.2
1.3	3.1.	ТОЕ Туре	. 2
1.3	3.2.	TOE Usage	. 2
1.3	3.3.	Required Non-TOE Hardware, Software and Firmware	.4
1.3	3.4.	Major Security Features of TOE	.4
1.4.	TOE	Description	.4
1.4	4.1.	TOE user	.4
1.4	1.2.	Physical Configuration of TOE	.5
1.4	1.3.	Logical Configuration of TOE	.7
1.4	1.4.	Functionality Excluded from the Evaluated Configuration	11
1.4	4.5.	Guidance	11
1.4	4.6.	Protected Assets of TOE	12
2. C	onfo	ormance Claim	16
		onformance Claim	16
	CC C		
2.1.	CC C PP C	onformance Claim	16
2.1. 2.2.	CC C PP C Pack	onformance Claim	16 16
<ol> <li>2.1.</li> <li>2.2.</li> <li>2.3.</li> <li>2.4.</li> </ol>	CC C PP C Pack	onformance Claim laims age Claims	16 16 17
<ul> <li>2.1.</li> <li>2.2.</li> <li>2.3.</li> <li>2.4.</li> <li>2.4</li> </ul>	CC C PP C Pack SFR I	onformance Claim laims age Claims Packages	16 16 17 17
2.1. 2.2. 2.3. 2.4. 2.4 2.4	CC C PP C Pack SFR I 4.1.	onformance Claim laims age Claims Packages SFR Packages functions	16 16 17 17 17
2.1. 2.2. 2.3. 2.4. 2.4 2.4 2.5.	CC C PP C Pack SFR I 4.1. 4.2. Conf	onformance Claim laims age Claims Packages SFR Packages functions SFR Packages attributes	16 16 17 17 17 18
2.1. 2.2. 2.3. 2.4. 2.4 2.4 2.5.	CC C PP C Pack SFR I 4.1. 4.2. Conf	onformance Claim laims age Claims Packages SFR Packages functions SFR Packages attributes ormance Rationale	16 17 17 17 18 <b>22</b>
2.1. 2.2. 2.3. 2.4. 2.4 2.4 2.5. <b>3. Se</b>	CC C PP C Pack SFR I 4.1. 4.2. Conf <b>ecur</b> Thre	onformance Claim laims age Claims Packages SFR Packages functions SFR Packages attributes formance Rationale <b>Tity Problem Definitions</b>	16 16 17 17 17 18 <b>22</b> 22
2.1. 2.2. 2.3. 2.4. 2.4 2.5. <b>3. Se</b> 3.1.	CC C PP C Pack SFR I 4.1. 4.2. Conf <b>CUI</b> Thre Thre	onformance Claim	16 16 17 17 17 18 <b>22</b> 22 22
2.1. 2.2. 2.3. 2.4. 2.4 2.5. <b>3. Se</b> 3.1. 3.2. 3.3.	CC C PP C Pack SFR I 4.1. 4.2. Conf <b>ECUI</b> Thre Thre Orga	onformance Claim	16 16 17 17 18 <b>22</b> 22 22 23
2.1. 2.2. 2.3. 2.4. 2.4. 2.4. 2.5. <b>3. Set</b> 3.1. 3.2. 3.3. 3.4.	CC C PP C Pack SFR I 4.1. 4.2. Conf <b>CUI</b> Thre Thre Orga Assu	onformance Claim laims age Claims Packages SFR Packages functions SFR Packages attributes ormance Rationale <b>ity Problem Definitions</b> ats agents ats agents ats to TOE Assets nizational Security Policies for the TOE	16 16 17 17 18 <b>22</b> 22 23 24

		rity Objectives for the operational environment	
4.5.	Sect		27
5. E	xter	nded Components Definition	32
5.1.	FPT_	_FDI_EXP Restricted forwarding of data to external interfaces	32
6. S	ecui	rity Requirements	35
6.1.	TOE	Security Functional Requirements	35
6	.1.1.	Class FAU: Security Audit	35
6	.1.2.	Class FCS: Cryptographic Support	43
6	.1.3.	Class FDP: User Data Protection	47
6	.1.4.	Class FIA: Identification and Authentication	53
6	.1.5.	Class FMT: Security Management	57
6	.1.6.	Class FPT: TSF Protection	67
6	.1.7.	Class FTA: TOE Access	69
6	.1.8.	Class FTP: High Trusted Path/Channel	69
6.2.	TOE	Security Assurance Requirement	70
6.3.	Secu	rity Requirements Rationale	70
6	.3.1.	Security Functional Requirements Rationale	70
6	.3.2.	Dependency Relationship of the TOE Security Functional Requirements	77
6	.3.3.	Security Assurance Requirements Rationale	80
7. T	OE S	Summary Specification	81
7.1.	User	Management Function	82
7.2.	Data	Access Control Function	84
7.3.	Job	Authorization Function	86
7.4.	HDD	Encryption Function	87
7.5.	Over	rwrite-Erase Function	88
7.6.	Audi	it Log Function	88
7.7.	Secu	rity Management Function	90
7.8.	Self-	Test Function	92
7.9.	Netv	work Protection Function	92
7.10	). Devi	ations From Allowed Cryptographic Standards	95
8. A	cror	nyms and Terminology	96
8.1.	Defi	nition of terms	96

8.2.	Definition of acronyms	98
------	------------------------	----

## List of Figures

Figure 1-1	Common usage in the offices	.3
Figure 1-2	Physical Configuration of TOE	.5
Figure 1-3	Logical Configuration of TOE	.8

#### List of Tables

TOE User	4
MFP products and their HDD configurations	6
Delivery method for each TOE components	6
Guidance that comprises TOE	11
User Data	12
User Data to be targeted by the TOE	13
TSF Data	13
TSF Data to be targeted by the TOE	13
SFR Package functions	17
SFR Package attributes	18
Relation between SFR of the ST and SFR of the PP	19
Threats to User Data for the TOE	22
Threats to TSF Data for the TOE	23
Organizational Security Policies for the TOE	23
Assumptions for the TOE	24
Security objectives for the TOE	25
Security objectives for the operational environment	26
Completeness of security objectives	27
Sufficiency of security objectives	28
Auditable data requirements	36
Key Generation	44
Cryptographic Operations	46
Cryptographic Operations	47
User Data Access Control SFP	49
User Data Access Control SFP for U.ADMINISTRATOR	50
TOE Function Access Control SFP	52
Management of security attributes	58
Operation of TSF data	61
Operation of TSF data	62
Management Functions	63
2600.2 Security Assurance Requirements	70
Completeness of Security Requirements	71
Dependency Relationship of the TOE Security Functional Requirements	77
TOE security functions and security functional requirements	81
	MFP products and their HDD configurations

Table 7-2	Access Control Rules for Data Access Control Functions	85
Table 7-3	Access Control Rules for Job Authorization Function	87
Table 7-4	Auditable Events and Audit Data	89
Table 7-5	Operation of TSF Data by Device Administrators	91
Table 7-6	Operation of TSF Data by Normal Users	92
Table 7-7	Trusted channel communications provided by the TOE	93
Table 8-1	Definitions of terms used in this ST	96
Table 8-2	Definitions of acronyms used in this ST	98

## 1. ST Introduction

1.1. ST Reference

ST Title	TASKalfa 7004i, TASKalfa 6004i, TASKalfa 5004i, TASKalfa 4004i Series
	with Hard Disk and FAX System
	Security Target
ST Version	1.00
Date	March 4, 2021
Author	KYOCERA Document Solutions Inc.

## 1.2. TOE Reference

TOE Title : TASKalfa 7004i, TASKalfa 6004i, TASKalfa 5004i, TASKalfa 4004i, TASKalfa 7004iG, TASKalfa 6004iG, TASKalfa 5004iG(KYOCERA), CS 7004i, CS 6004i, CS 5004i, CS 4004i(Copystar), 7058i, 6058i, 5058i(TA Triumph-Adler/UTAX), with Hard Disk and FAX System

Remarks :

The models with Hard Disk and FAX System are the products that comprise the models such as TASKalfa 7004i, TASKalfa 6004i, TASKalfa 5004i, TASKalfa 4004i, TASKalfa 7004iG, TASKalfa 6004iG, TASKalfa 5004iG, CS 7004i, CS 6004i, CS 5004i, CS 4004i, 7058i, 6058i, 5058i and the following additional options:

- Hard Disk Option (HD-15)
- FAX Option (FAX System 12)

The HDD option (HD-15) is not required in the case of the product supports HDD as standard.

TOE Version :System: 2XF\_S000.002.206FAX: 3R2\_5100.003.012Developer :KYOCERA Document Solutions Inc.Applicable MFP :KYOCERA TASKalfa 7004i, KYOCERA TASKalfa 6004i,<br/>KYOCERA TASKalfa 5004i, KYOCERA TASKalfa 4004i,<br/>KYOCERA TASKalfa 5004iG, KYOCERA TASKalfa 6004iG,<br/>KYOCERA TASKalfa 5004iG,<br/>Copystar CS 7004i, Copystar CS 6004i,

 $<sup>\</sup>ensuremath{\mathbb{C}}$  2021 KYOCERA Document Solutions Inc.

Copystar CS 5004i, Copystar CS 4004i, TA Triumph-Adler 7058i, TA Triumph-Adler 6058i, TA Triumph-Adler 5058i, UTAX 7058i, UTAX 6058i, UTAX 5058i

This TOE is identified by a combination of the respective MFP titles as listed in the TOE title and each version of the two kinds of firmwares, which is installed on the above-described TOE. There are multiple MFP titles as listed above, however the MFP components are all the same. The only differences are print speed and sales destinations.

#### 1.3. TOE Overview

#### 1.3.1. TOE Type

The TOE defined in this ST is a Multi-Function Printer (MFP) manufactured by KYOCERA Document Solutions Inc., namely, "TASKalfa 7004i, TASKalfa 6004i, TASKalfa 5004i, TASKalfa 4004i, TASKalfa 7004iG, TASKalfa 6004iG, TASKalfa 5004iG, CS 7004i, CS 6004i, CS 5004i, CS 4004i, 7058i, 6058i, 5058i", each of which includes mainly Copy function, Scan function, Print function, FAX function and Box function. As for the HDD, there are two HDD configurations depending on the sales area. One is equiped with HDD as standard and the other does is not equipped with an HDD. In the case the device is not equipped with an HDD, the optional HD-15 must be installed on the device to be available (Refer Section 1.4.2). As for the FAX function, optional FAX System 12 must be installed on the device to be available.

#### 1.3.2. TOE Usage

This TOE can perform copying (duplication), printing (paper output), sending (electronization) and storing (accumulation) of various documents handled by users. The TOE is located in a common office environment and is not only used as a standalone but also connected to LAN for the use in the network environment. In the network environment, the TOE is assumed to be used by connecting to a server and a client PC on the internal network protected from unauthorized access on the external network by firewall. And, the TOE is assumed to be used by connecting to a Local Port (USB Port). In this user environment, the above-mentioned operational functions can be performed through operations on the operation panel or from the client PCs on the network and of the local connection.

Figure 1-1 Common usage in the offices shows a normal user environment.

#### © 2021 KYOCERA Document Solutions Inc.

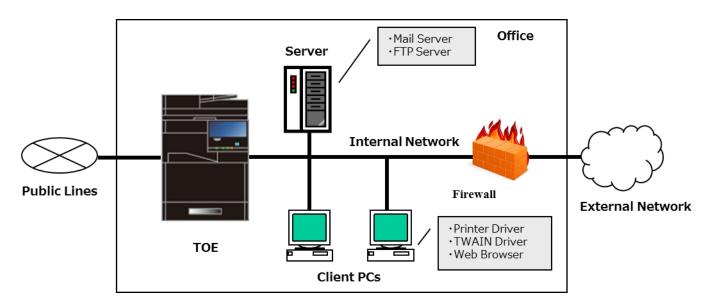


Figure 1-1 Common usage in the offices

The environment to use the common functions of the TOE is illustrated as follows.

Internal Network :

The network environment inside the office protected from unauthorized access on the external network by firewall.

• Client PC:

It is connected to the MFP via the internal network or a Local Port (USB Port). The common functions of the MFP can be available upon receipt of a user instruction. Client PC needs the following:

- Printer Driver
- TWAIN Driver
- Web Browser
- Server:

It is used when sending the documents in the MFP. The following servers are needed.

- Mail Server
- FTP Server
- Public Line:

A public line is needed when sending and receiving the documents in the MFP by the FAX.

#### 1.3.3. Required Non-TOE Hardware, Software and Firmware

Required Non-TOE Hardware, Software and Firmware name is as follows.

- Client PCs:
  - Printer Driver : KX Driver
  - TWAIN Driver : Kyocera TWAIN Driver
  - Web Browser : Microsoft Internet Explorer 11.0
- Mail Server : IPsec(IKEv1) should be available.
- FTP Server : IPsec(IKEv1) should be available.

#### 1.3.4. Major Security Features of TOE

The TOE can perform copying, printing, sending scanned data, FAX (send/receive) and Box storage of various documents handled by users. To prevent alteration and leaks of these documents, the TOE has functions to identify and to authenticate users, to control access to image data or functions, to encrypt image data, to overwrite-erase the residual image data, to generate and to refer audit logs, to allow only authorized users to make security function related settings, to perform the TOE self-test, and to protect the network.

#### 1.4. TOE Description

#### 1.4.1. TOE user

User roles related to the use of the TOE are defined as follows.

Designation		Explanation	
U.USER		A person who is authorized to use the TOE.	
User			
	U.NORMAL	A person who uses the TOE. A normal user can use	
	Normal User	Copy function, Print function, Scan to Send function, Fax	
		(Send/Receive) function and Box function.	

#### Table 1-1 TOE User

U.ADMINISTRATOR	A person who manages the TOE. A device administrator has
Device	privilege to manage device configuration, installation and
Administrator	operation for the TOE correct behavior. This ST includes both a
	user (Device Administrator) who has administration privilege
	that has been registered in advance when setting the factory
	default and a user (Administrator) who has administrator
	privilege that enable this administrator to make additional
	registration as needed during operation.

## 1.4.2. Physical Configuration of TOE

The conceptual figure of physical configuration of the TOE is shown in Figure 1-2 Physical Configuration of TOE.

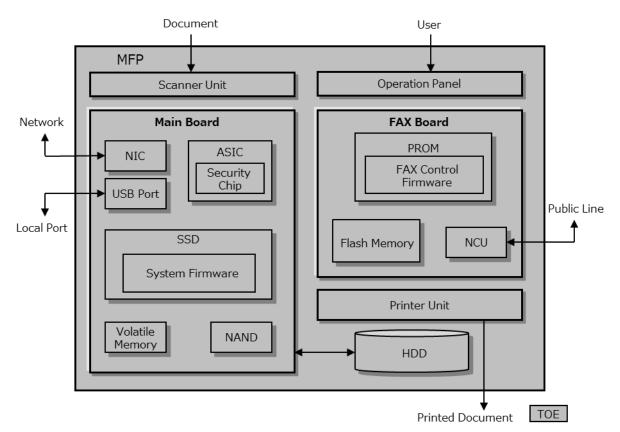


Figure 1-2 Physical Configuration of TOE

The TOE consists of an Operation Panel, a Scanner Unit, a Printer Unit, a Main Board, a FAX Board, HDD and SSD hardware, and firmwares.

The Operation Panel is the hardware that displays status and results upon receipt of input by the TOE user. The Scanner Unit and the Printer Unit are the hardware that input document

 $<sup>\</sup>ensuremath{\mathbb{C}}$  2021 KYOCERA Document Solutions Inc.

into MFP and output as printed material.

A Main Board is the circuit board to control entire TOE. A system firmware is installed on a SSD, which is positioned on the Main Board. The Main Board has a Network Interface (NIC) and a Local Interface (USB Port).

ASIC that is also on the Main Board includes a Security Chip, which shares installation of some of the security functions. The Security Chip realizes security arithmetic processing for HDD encryption function and HDD Overwrite-Erase function (See below).

A FAX control firmware that controls FAX communication is installed on the PROM, which is positioned on the FAX Board. Additionally, a FAX Board has a NCU as an interface.

As for memory mediums, a NAND that stores device settings, a Volatile Memory that is used as working area and a SSD for the system firmware installation are positioned on the Main Board. A Flash Memory that stores FAX receive/send image, and a PROM for the FAX control firmware installation are positioned on the FAX Board. A HDD that stores image data and job data, is connected to the Main Board. Any of the above memory mediums are not removable. Only the FAX receive/send image is stored in the Flash Memory. Image data handled by other basic functions is stored in the HDD. However, image data is not stored in the SSD.

There are two kinds of HDD configurations on the MFP products depending on the sales area. One is equipped with HDD as standard and the other is not equipped with an HDD.

MFP product name	Sales Area	HDD Configuration
TASKalfa 4004i, CS 7004i, CS 6004i,	-	Installed as standard
CS 5004i, CS 4004i		
TASKalfa 4004i	North America	Installed as standard
TASKalfa 7004i, TASKalfa 6004i,	North America	Installed as standard
TASKalfa 5004i	Other Area	Not installed
TASKalfa 7004iG, TASKalfa 6004iG,	-	Not installed
TASKalfa 5004iG, 7058i, 6058i, 5058i		

 Table 1-2
 MFP products and their HDD configurations

The delivery method for each TOE components is as follows. Guidance is also a part of TOE.

#### Table 1-3 Delivery method for each TOE components

TOE Configuration Form Delivery Method	Identification Information
--	----------------------------

MFP Device (with HDD	MFP Device	Courier	MFP product name described
installed as standard)			in Table 1-2 and firmware
			version information described
			in TOE Reference + Mass
			storage device: HDD 320GB
MFP Device (without	MFP Device	Courier	MFP product name described
HDD)			in Table 1-2 and firmware
			version information described
			in TOE Reference + Mass
			storage device: Not installed
Hard Disk	HDD hardware	Courier	HD-15
* If option installation is			
required.			
Fax	FAX Board	Courier	FAX System 12
Guidance	Paper document,	Included in the	Name and version described in
	PDF format file	box of the MFP	Table 1-4.
	in DVD	device.	

\* Firmware is preinstalled in the MFP

## 1.4.3. Logical Configuration of TOE

The conceptual figure of logical configuration of the TOE is shown in Figure 1-3.

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

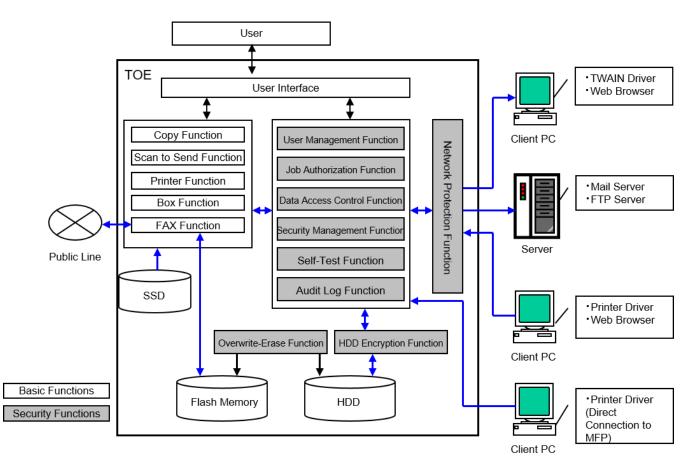


Figure 1-3 Logical Configuration of TOE

## 1.4.3.1. Basic Functions provided by TOE

The TOE provides the following basic functions.

Copy Function

A function that reads image data from the Scanner of the TOE and outputs from the Printer Unit of the TOE by inputting or operating from the Operation Panel by normal users. (Execute a Copy job)

• Scan to Send Function

A function that sends image data to client PCs or servers connected via LAN by inputting or operating from the Operation Panel and the TWAIN Driver of Client PCs by general users. The following types of send functions are available. (Execute a Scan to Send job)

- FTP send (FTP Server)
- E-mail send (Mail Server)
- TWAIN send (TWAIN Driver)

## Print Function

A function that outputs received image data from the Printer Unit of the TOE by printing instructions from Client PCs connected over LAN or a local port to MFP by normal users. The printing instructions are given from the printer driver installed on Client PCs. The function also supports printing from a USB Memory connected to the local port. The printing instructions are given from the Operation Panel. (Execute a Print job)

## Fax Function

A function that sends and receives documents by FAX via public line. As for FAX Send, the scanned image data will be sent by FAX to outside. Whereas for FAX Reception, the received image data will be outputted from the Print Unit of the TOE, and then forwarded to outside. (Execute a FAX Send job)

## Box Function

A function that stores image data in the HDD, reads image data from the HDD and then sends it or print it by normal users. Image data can also be moved or joined inside the box. However, image data sent or received by the FAX function can be stored in a Flash Memory. (Execute a Box Storage job, a Box Send job and a Box Print job)

Inputted image data is stored in the HDD by inputting/operating by normal users from the Operation Panel or the Client PCs connected over LAN or directly connected with MFP. In addition, image data transmitted/received by using the FAX function is stored in the Flash Memory. Stored image data can be outputted from the Print Unit of the TOE or sent to a server such as a Client PC, a mail server and other faxes over public line. Stored image data can also be deleted. When inputting from Client PCs, printer driver is used, and when operating from Client PCs, web browser is used. The following types of send functions are available.

- FTP send (FTP Server)
- E-mail send (Mail Server)
- TWAIN send (TWAIN Driver)
- FAX send (Other faxes)
- USB Memory send (USB Memory)

1.4.3.2. Security Functions provided by TOE

TOE provides the following security functions.

User Management Function

A function that identifies and authenticates users so that only authorized users can use the TOE. When using the TOE from the Operation Panel and Client PCs, a user will be required to enter his/her login user name and login user password for identification and

authentication. The User Management Function includes a User Account Lockout Function, which prohibits the users access for a certain period of time if the number of identification and authentication attempts consecutively result in failure, a function, which protects feedback on input of login user password when performing identification and authentication and a function, which automatically logouts in case no operation has been done for a certain period of time.

• Data Access Control Function

A function that restricts access to protected assets so that only authorized users can access to the protected assets inside the TOE.

The following types of Access Control Functions are available.

- > Access Control Function to control access to image data
- Access Control Function to control access to job data

#### • Job Authorization Function

A function that restricts usage of the function so that only authorized persons can use basic functions of the TOE .

The following types of Job Authorization are available.

- Copy Job (Copy Function)
- Print Job (Print Function)
- Send Job (Scan to Send Function)
- FAX Send Job (FAX Function)
- > FAX Reception Job (FAX Function)
- Storing Job (Box Function)
- Network Job (Network Protection Function)

#### HDD Encryption Function

A function that encrypts information assets stored in the HDD in order to prevent leakage of data stored in the HDD inside the TOE.

• Overwrite-Erase Function

A function that does not only logically delete the management information of the image data, but also entirely overwrites and erases the actual data area so that it disables re-usage of the data where image data that was created on the HDD or the Flash Memory during usage of the basic functions of the TOE.

## • Audit Log Function

A function that records and stores the audit logs of user operations and security-relevant events on the HDD. This function provides the audit trails of TOE use and security-relevant events. Stored audit logs can be accessed only by a device administrator. The stored audit logs will be sent by email to the destination set by the device administrator.

Security Management Function
 A function that sets security functions of the TOE. This function can be used only by
 authorized users. This function can be utilized from an Operation Panel and a Client PC.
 Operations from a Client PC use a web browser.

## Self-Test Function

A function that verifies the integrity of TSF executable code and TSF data to detect unauthorized alteration of the executable code of the TOE security functions.

## • Network Protection Function

A function that protects communication paths to prevent leaking and altering of data by eavesdropping of data in transition over the internal network connected to TOE. This function verifies the propriety of the destination to connect to and protects targeted information assets by encryption, when using a Scan to Send Function, a Print Function, a Box Function and a BOX Function from a Client PC (web browser), or a Security Management Function from a Client PC (web browser). However, usage of a Print Function directly connected to a MFP is exception.

This function also provides a feature to prevent forwarding of information from an external interface to an internal network through TOE without permission.

## 1.4.4. Functionality Excluded from the Evaluated Configuration

The following features are excluded from this evaluation:

• Maintenance Interface

## 1.4.5. Guidance

The guidance comprising the TOE is shown below.

Name	Version
Notice (KYOCERA)	302XF5641001
Notice (Copystar)	302XF5642001
Notice (TA Triumph-Adler/UTAX)	302XF5643001
FAX System 12 Installation Guide	303RK5671101
TASKalfa 7004i / TASKalfa 6004i / TASKalfa 5004i First	302XF5602001
Steps Quick Guide (KYOCERA)	

## Table 1-4 Guidance that comprises TOE

7004i / 6004i / 5004i / 4004i First Steps Quick Guide	302XF5601001
(Copystar)	
TASKalfa 5004i / TASKalfa 6004i / TASKalfa 7004i	2XFKDEN000
Operation Guide (KYOCERA)	
4004i / 5004i / 6004i / 7004i Operation Guide (Copystar)	2XFKDEN200
TASKalfa 2554ci / TASKalfa 3554ci / TASKalfa 4054ci /	302XC5622001
TASKalfa 5054ci / TASKalfa 5004i / TASKalfa 6054ci /	
TASKalfa6004i / TASKalfa 7054ci / TASKalfa 7004i Safety	
Guide (KYOCERA)	
2554ci / 3554ci / 4054ci / 4004i / 5054ci / 5004i / 6054ci	302XC5621001
/ 6004i / 7054ci / 7004i Safety Guide (Copystar)	
FAX System 12 Operation Guide	3RKKDEN300
Data Encryption/Overwrite Operation Guide	3MS2XCKDEN1
Command Center RX User Guide	CCRXKDEN23
TASKalfa 7004i / TASKalfa 6004i / TASKalfa 5004i Printer	2XFBWKTEN750.2020.02
Driver User Guide (KYOCERA)	
7004i / 6004i / 5004i / 4004i Printer Driver User Guide	2XFBWKCEN750.2020.02
(Copystar)	
KYOCERA Net Direct Print User Guide	DirectPrintKDEN2.2019.2

#### 1.4.6. Protected Assets of TOE

Protected Assets of TOE are User Data, TSF Data and Functions.

## 1.4.6.1. User Data

User Data is created by a user, and have no effect on the TOE Security Functions (TSF). The User Data is classified into the following two types.

#### Table 1-5 User Data

Designation	Definition
D.DOC	User Document Data consist of the information contained in a user's document.
	This includes the original document itself in either hardcopy or electronic form,
	image data, or residually stored data created by the hardcopy device while
	processing an original document and printed hardcopy output.
D.FUNC	User Function Data is the information about a user's document or job to be
	processed by the TOE.

User Data to be targeted by the TOE is shown in Table 1-6.

Designation	User Data	Explanation
D.DOC	Image Data	Image Data that have attributes of +PRT、+SCN、+CPY、+FAXIN、
		+FAXOUT、+DSR、+SMI shown in Table 2-2.
	Residual Data	After processing the above image data, unneccesary image
		data is deleted but only management data is deleted, and so
		actual data still remain.
D.FUNC	Job Data	Job Data that is processed when executing basic functions.

#### Table 1-6User Data to be targeted by the TOE

## 1.4.6.2. TSF Data

TSF Data is created by the TOE, and could have an effect on the TOE. The TSF Data is classified into the following two types.

#### Table 1-7 TSF Data

Designation	Definition
D.PROT	TSF Protected Data is assets for which alteration by a User who is neither an
	Administrator nor the owner of the data would have an effect on the
	operational security of the TOE, but for which disclosure is acceptable.
D.CONF	TSF Confidential Data is assets for which either disclosure or alteration by a
	User who is neither an Administrator nor the owner of the data would have an
	effect on the operational security of the TOE.

TSF Data to be targeted by the TOE is shown in Table 1-8.

#### Table 1-8 TSF Data to be targeted by the TOE

Designation	TSF Data	Explanation
D.PROT	Login User Name	User's identification information that is used for the User
		Management Function.
	User Authorization	User's authorization information that is used for the User
		Management Function. There are authorization such as
		U. ADMINISTRATOR and U.NORMAL with respect to the
		TOE.

Settingsexecution is authorized. Job authorization settings for the user management function are assigned to each user.ExecutableAttributes that show Copy Function, Print Function, AttributesAttributesScan to Send Function, FAX Function and Box Function of the TOE are excutable.Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until LockedNumber of retries until user account is locked out. This information is used for the user management function.Lockout Policy Settings )Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection	Г	Job Authorization	This is to get whether or not the TOP attribute based
User management function are assigned to each user.ExecutableAttributes that show Copy Function, Print Function, AttributesAttributesScan to Send Function, FAX Function and Box Function of the TOE are excutable.Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until LockedNumber of retries until user account is locked out. This information is used for the user management function.(User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for shaving the box owner. Login user name is assigned to the owner information.Box PermissionSetting for shaving the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			
Executable AttributesAttributes that show Copy Function, Print Function, Scan to Send Function, FAX Function and Box Function of the TOE are excutable.Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until LockedNumber of retries until user account is locked out. This information is used for the user management function.User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingsTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Settings	_
AttributesScan to Send Function, FAX Function and Box Function of the TOE are excutable.Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until Locked (User Account Lockout PolicyNumber of retries until user account is locked out. This information is used for the user management function.(User Account Lockout PolicyTime duration of rejection before user account is unlocked. This information is used for the user management function.(User Account Lockout PolicyUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingsTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection		-	
the TOE are excutable.Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until Locked (User Account Lockout Policy Settings)Number of retries until user account is locked out. This information is used for the user management function.Lockout Duration (User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Duration Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Dolarion Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for shaving the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time Setting information for TLS and IPsec encryption communication, which is used for Network Protection			
Owner InformationOwner Information that targeted assets hold. Login user name is assigned to the owner information.Number of Retries until Locked (User Account Lockout Policy Settings)Number of retries until user account is locked out. This information is used for the user management function.Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Duration (User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy Setting for showing the box owner. Login user name is assigned to the owner information.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time Setting information for TLS and IPsec encryption communication, which is used for Network Protection		Attributes	
Number of Retries until Locked (User Account Lockout Policy Settings)Number of retries until user account is locked out. This information is used for the user management function. (User Account Lockout Duration (User Account User Account Lockout Duration (User Account User Account Dickout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function. Settings)Lockout Dolicy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information that is used for setting Password Policy as password length, complexity and validity period. Box OwnerBox PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for date and time			
Number of Retries until Locked (User Account Lockout Policy Settings )Number of retries until user account is locked out. This information is used for the user management function.Lockout Policy Settings )Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Duration (User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for shaving the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time Setting information for date and time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Owner Information	
until Locked (User Account Lockout Policy Settings )information is used for the user management function.Lockout Duration (User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection			name is assigned to the owner information.
(User Account Lockout Policy Settings )Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Dolicy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)Description of rejection before user account is unlocked. This information is used for the user management function.Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Number of Retries	Number of retries until user account is locked out. This
Lockout Policy Settings )Time duration of rejection before user account is unlocked. This information is used for the user Lockout Policy Settings)Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function. Settings)Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection		until Locked	information is used for the user management function.
Settings )Time duration of rejection before user account is unlocked. This information is used for the user Lockout Policy Settings)Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information that is used for setting Password Policy settingsPassword Policy SettingInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for TLS and IPsec encryption communication, which is used for Network Protection		(User Account	
Lockout Duration (User Account Lockout Policy Settings)Time duration of rejection before user account is unlocked. This information is used for the user management function.Lockout Policy Settings)User list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Lockout Policy	
(User Account Lockout Policy Settings)unlocked. This information is used for the user management function.Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Settings)	
Lockout Policy Settings)management function.Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Lockout Duration	Time duration of rejection before user account is
Settings)User list that shows users with their user names who are lockout ListLockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		(User Account	unlocked. This information is used for the user
Lockout ListUser list that shows users with their user names who are locked out for user management function. Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Lockout Policy	management function.
Index		Settings)	
Release of lockout on per user account basis from the list can be instructed by a device administrator.Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information, which is used for Network Protection		Lockout List	User list that shows users with their user names who are
Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			locked out for user management function.
Auto Logout Time SettingTime information about automatic termination of login session.Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			Release of lockout on per user account basis from the list
Settingsession.Password PolicyInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			can be instructed by a device administrator.
Password Policy SettingsInformation that is used for setting Password Policy such as password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Auto Logout Time	Time information about automatic termination of login
Settingsas password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Setting	session.
Settingsas password length, complexity and validity period.Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Decouvered Deliev	Information that is used for actting Decouverd Deliny such
Box OwnerSetting for showing the box owner. Login user name is assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			
assigned to the owner information.Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and time SettingsNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection			
Box PermissionSetting for sharing documents inside a box with all users. When box permission is enabled , all the users can access to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Box Owner	
When box permission is enabled , all the users can access to the box.         Date and Time       Setting information for date and time         Settings       Network         Network       Setting information for TLS and IPsec encryption         Encryption Setting       communication, which is used for Network Protection			
to the box.Date and Time SettingsSetting information for date and timeNetwork Encryption SettingSetting information for TLS and IPsec encryption communication, which is used for Network Protection		Box Permission	
Date and Time SettingsSetting information for date and timeSettingsSetting information for TLS and IPsec encryptionNetwork Encryption SettingSetting information, which is used for Network Protection			
SettingsNetworkEncryption Settingcommunication, which is used for Network Protection			
NetworkSetting information for TLS and IPsec encryptionEncryption Settingcommunication, which is used for Network Protection			Setting information for date and time
Encryption Setting communication, which is used for Network Protection			
		Network	Setting information for TLS and IPsec encryption
function.		Encryption Setting	communication, which is used for Network Protection
			function.
FAX Forward Setting for forwarding of received fax data.		FAX Forward	Setting for forwarding of received fax data.
Setting		Setting	

	Send destination information for forwarding Audit Log Report	Destination information when sending audit log report to an administrator.
D.CONF	Login User Password	Authentication information of users that is required for user management function.
		5
	Audit Log	Log data that are generated by an audit log function.
	Encryption Key	Encryption key that is used for HDD encryption function.

#### 1.4.6.3. Functions

Functions are shown in Table 2-1 SFR Package functions.

## 2. Conformance Claim

#### 2.1. CC Conformance Claim

The CC conformance claim of this ST and TOE is as follows.

CC version for which this ST and TOE claim conformance:

Common Criteria for Information Technology Security Evaluation Part1: Introduction and general model Version 3.1 Revision 5 Part2: Security functional components Version 3.1 Revision 5 Part3: Security assurance components Version 3.1 Revision 5

Common Criteria conformance: CC Part2 extended and CC Part3 conformant

#### 2.2. PP Claims

This ST claims demonstrable conformance to the following PP

PP Name/Identification :	IEEE Std 2600.2-2009; "2600.2-PP, Protection Profile for Hardcopy
	Devices, Operational Environment B" (with NIAP CCEVS Policy
	Letter #20) ([PP2600.2])
Version :	1.0

Notes: In this Security Target, [PP2600.2] has been modified to conform with the NIAP CCEVS Policy Letter #20 ([CCEVS-PL20]).

#### 2.3. Package Claims

The ST and TOE claim the package: EAL2 and addition. Additional Component is ALC\_FLR.2.

The ST conforms to the following SFR Packages.

2600.2-PRT SFR Package for Hardcopy Device Print Functions, Operational Environment B Conformant

2600.2SCN SFR Package for Hardcopy Device Scan Functions, Operational Environment B Conformant

2600.2-CPY SFR Package for Hardcopy Device Copy Functions, Operational Environment B Conformant

2600.2-FAX SFR Package for Hardcopy Device Fax Functions, Operational Environment B Conformant

2600.2-DSR SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions, Operational Environment B Conformant

2600.2-SMI SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment B Conformant

#### 2.4. SFR Packages

2.4.1. SFR Packages functions

Functions perform processing, storage, and send of data that may be present in HCD products. The functions that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 2-1.

Designation	Definition
F.PRT	Printing: a function in which electronic document input is converted to physical
	document output
F.SCN	Scanning: a function in which physical document input is converted to
	electronic document output
F.CPY	Copying: a function in which physical document input is duplicated to physical
	document output
F.FAX	Faxing: a function in which physical document input is converted to a
	telephone-based document facsimile (fax) send, and a function in which a
	telephone-based document facsimile (fax) reception is converted to physical
	document output
F.DSR	Document storage and retrieval: a function in which a document is stored
	during one job and retrieved during one or more subsequent jobs
F.SMI	Shared-medium interface: a function that transmits or receives User Data or
	TSF Data over a communications medium which, in conventional practice, is or
	can be simultaneously accessed by multiple users, such as wired network media
	and most radio-frequency wireless media

#### Table 2-1 SFR Package functions

## 2.4.2. SFR Packages attributes

When a function is performing processing, storage, or send of data, the identity of the function is associated with that particular data as a security attribute. This attribute in the TOE model makes it possible to distinguish differences in Security Functional Requirements that depend on the

function being performed. The attributes that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 2-2 SFR Package attributes.

Designation	Definition
+PRT	Indicates data that are associated with a print job.
+SCN	Indicates data that are associated with a scan job.
+CPY	Indicates data that are associated with a copy job.
+FAXIN	Indicates data that are associated with an inbound (received) fax job.
+FAXOUT	Indicates data that are associated with an outbound (sent) fax job.
+DSR	Indicates data that are associated with a document storage and
	retrieval job.
+SMI	Indicates data that are transmitted or received over a shared-medium
	interface.

Table 2-2SFR Package attributes

## 2.5. Conformance Rationale

The rationale that the ST conforms to PP is as follows.

The TOE type is the MFP, which has mainly the Copy Function, Scan to Send Function, Print Function, FAX Function and Box Function. This MFP is consistent with the TOE type, which is the Hardcopy Devices described in the PP (i.e. 2600.2, Protection Profile for Hardcopy Devices, Operational Environment B). The MFP also has the network function that connects to an internal network. Whereas, the MFP has the NAND, Volatile Memory, Flash Memory, HDD, SSD as storage medium, and PROM to install firmware, however None of which are removable storage medium. Therefore, the MFP conforms to six out of seven SFR Packages, which are defined by the PP, except for 2600.2-NVS, SFR Package for Hardcopy Device Nonvolatile Storage Functions, Operational Environment B.

Next, described below are the security problem definitions, security objectives and security requirements that conform to the PP.

Regarding security problem definitions, P.HDD. ENCRYPTION is augmented to the security problem definitions, covering all the contents of the PP. P.HDD.ENCRYPTION is not OSP that restricts an operational environment. Therefore, the operational environment, which conforms to the security problem definitions in the PP, still confirms to the security problem definitions of the ST. Thus the ST is more restrictive than all the security problem definitions in the PP.

Regarding security objectives, O.HDD.ENCRYPTION is augmented to the security objectives, which includes all the contents of the PP, except for OE.AUDIT\_STORAGE.PROTECTED and OE.AUDIT\_ACCESS.AUTHORIZED. O.HDD.ENCRYPTION is not the objective that restricts an operational environment. Therefore, the operational environment, which conforms to the security objectives in the PP, still conforms to the security objectives of the ST. Thus the ST is more restrictive than all the security objectives in the PP.

With the security objectives defined in the PP, the security objectives to P.AUDIT.LOGGING such as OE.AUDIT\_STORAGE.PROTECTED and OE.AUDIT\_ACCESS.AUTHORIZED are replaced by O.AUDIT\_STORAGE.PROTECTED and O.AUDIT\_ACCESS.AUTHORIZED. Internal functions that enforce O.AUDIT\_STORAGE.PROTECTED and O.AUDIT\_ACCESS.AUTHORIZED have the equivalent capability to the capability of the operational environment security objectives that are requested from OE.AUDIT\_STORAGE.PROTECTED and OE.AUDIT\_ACCESS.AUTHORIZED.

Regarding security requirements, relation between SFR defined in the ST and SFR defined in the PP is shown in .

SFR of the ST	PP requirements	
FAU_GEN.1	$\checkmark$	
FAU_GEN.2	$\checkmark$	
FAU_SAR.1		
FAU_SAR.2		
FAU_STG.1		
FAU_STG.4		
FCS_CKM.1(a)		
FCS_CKM.1(b)		
FCS_CKM.1(c)		
FCS_COP.1(a)		
FCS_COP.1(b)		
FCS_COP.1(c)		
FDP_ACC.1(a)	$\checkmark$	
FDP_ACF.1(a)	$\checkmark$	
FDP_ACC.1(b)	~	
FDP_ACF.1(b)	✓	
FDP_RIP.1	✓	
FIA_AFL.1		

## Table 2-3Relation between SFR of the ST and SFR of the PP

© 2021 KYOCERA Document Solutions Inc.

SFR of the ST	PP requirements	
FIA_ATD.1	✓	
FIA_SOS.1		
FIA_UAU.1	✓	
FIA_UAU.7		
FIA_UID.1	✓	
FIA_USB.1	$\checkmark$	
FMT_MSA.1(a)	✓	
FMT_MSA.3(a)	✓	
FMT_MSA.1(b)	✓	
FMT_MSA.3(b)	✓	
FMT_MTD.1(a)	✓	
FMT_MTD.1(b)	✓	
FMT_SMF.1	✓	
FMT_SMR.1	✓	
FPT_STM.1	✓	
FPT_TST.1	✓	
FPT_FDI_EXP.1	✓	
FTA_SSL.3	✓	
FTP_ITC.1	✓	

The ST covers all the SFRs required from the PP. In addition, FAU\_SAR.1, FAU\_SAR.2, FAU\_STG.1, FAU\_STG.4, FCS\_CKM.1(a), FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(a), FCS\_COP.1(b), FCS\_COP.1(c), FIA\_AFL.1, FIA\_SOS.1 and FIA\_UAU.7 are augmented to the ST. In the operation of assignment of FTA\_SSL.3, the time interval of user inactivity of operation panel and web browser is specified. However, this TOE does not have any interfaces that support an interactive session with the exception of operation panel and web browser. The operation of assignment of the rule of explicit authorization for U.ADMINISTRATOR is eliminated in FDP\_ACF.1.3(b). However, it is more strict comparing to the original PP requirement that it does not have rules to have additional authorization.

All of the TOE that satisfy the ST, fulfill the PP security requirements, but more restrictive.

Finally, SAR defined in the PP and SAR defined in the ST are equivalent to each other.

Because the ST provides the PP with the resolution for common security problem definitions described in the PP in the equivalent and more restrictive manner, therefore conformance to the PP is demonstrated.

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

#### © 2021 KYOCERA Document Solutions Inc.

## 3. Security Problem Definitions

This section describes Threats, Organizational Security Policies and Assumptions.

#### 3.1. Threats agents

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE
- b) Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they not authorized.
- d) Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in the Protection Profile address the threats posed by these threat agents.

#### 3.2. Threats to TOE Assets

This section describes threats to assets described in clause 1.4.6.

Threat	Affected	Description
	asset	
T.DOC.DIS	D.DOC	User Document Data may be disclosed to
		unauthorized persons
T.DOC.ALT	D.DOC	User Document Data may be altered by unauthorized
		persons
T.FUNC.ALT	D.FUNC	User Function Data may be altered by unauthorized
		persons

 Table 3-1
 Threats to User Data for the TOE

Threat	Affected	Description
	asset	
T.PROT.ALT	D.PROT	TSF Protected Data may be altered by unauthorized
		persons
T.CONF.DIS	D.CONF	TSF Confidential Data may be disclosed to
		unauthorized persons
T.CONF.ALT	D.CONF	TSF Confidential Data may be altered by unauthorized
		persons

Table 3-2Threats to TSF Data for the TOE

3.3. Organizational Security Policies for the TOE

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for Security Objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Name	Definition
P.USER.AUTHORIZATION	To preserve operational accountability and
	security, Users will be authorized to use the
	TOE only as permitted by the TOE Owner.
P.SOFTWARE.VERIFICATION	To detect corruption of the executable code in
	the TSF, procedures will exist to self-verify
	executable code in the TSF.
P.AUDIT.LOGGING	To preserve operational accountability and
	security, records that provide an audit trail of
	TOE use and security-relevant events will be
	created, maintained, and protected from
	unauthorized disclosure or alteration, and will
	be reviewed by authorized personnel.
P.INTERFACE.MANAGEMENT	To prevent unauthorized use of the external
	interfaces of the TOE, operation of those
	interfaces will be controlled by the TOE and its
	IT environment.

## Table 3-3 Organizational Security Policies for the TOE

P.HDD.ENCRYPTION	То	improve	the	confidentiality	of	the
	doc	uments, Us	ser Da	ta and TSF Data	store	ed in
	HDD	) will be en	crypte	d by the TOE.		

#### 3.4. Assumptions

The Security Objectives and Security Functional Requirements defined in subsequent sections of the Protection Profile are based on the condition that all of the assumptions described in this section are satisfied.

Assumption	Definition	
A.ACCESS.MANAGED	The TOE is located in a restricted or monitored environment that	
	provides protection from unmanaged access to the physical	
	components and data interfaces of the TOE.	
A.USER.TRAINING	TOE Users are aware of the security policies and procedures of	
	their organization, and are trained and competent to follow those	
	policies and procedures.	
A.ADMIN.TRAINING	Administrators are aware of the security policies and procedures	
	of their organization, are trained and competent to follow the	
	manufacturer's guidance and documentation, and correctly	
	configure and operate the TOE in accordance with those policies	
	and procedures.	
A.ADMIN.TRUST	Administrators do not use their privileged access rights for	
	malicious purposes.	

# 4. Security Objectives

This section describes Security Objectives for TOE, Security Objectives of Operational Environment and Security Objectives Rationale.

4.1. Security Objectives for the TOE

This section describes the security objectives that the TOE shall fulfill.

Objective	Definition	
O.DOC.NO_DIS	The TOE shall protect User Document Data from	
	unauthorized disclosure.	
O.DOC.NO_ALT	The TOE shall protect User Document Data from	
	unauthorized alteration.	
O.FUNC.NO_ALT	The TOE shall protect User Function Data from	
	unauthorized alteration.	
O.PROT.NO_ALT	The TOE shall protect TSF Protected Data from	
	unauthorized alteration.	
O.CONF.NO_DIS	The TOE shall protect TSF Confidential Data from	
	unauthorized disclosure.	
O.CONF.NO_ALT	The TOE shall protect TSF Confidential Data from	
	unauthorized alteration.	
O.USER.AUTHORIZED	The TOE shall require identification and	
	authentication of Users, and shall ensure that Users	
	are authorized in accordance with security policies	
	before allowing them to use the TOE.	
O.INTERFACE.MANAGED	The TOE shall manage the operation of external	
	interfaces in accordance with security policies.	
O.SOFTWARE.VERIFIED	The TOE shall provide procedures to self-verify	
	executable code in the TSF.	
O.AUDIT.LOGGED	The TOE shall create and maintain a log of TOE use	
	and security-relevant events, and prevent its	
	unauthorized disclosure or alteration.	
O.AUDIT_STORAGE.PROTECTED	The TOE shall ensure that audit records are	
	protected from unauthorized access, deletion and	
	modifications.	

Table 4-1Security objectives for the TOE

Objective	Definition
O.AUDIT_ACCESS.AUTHORIZED	The TOE shall ensure that audit records can be
	accessed in order to detect potential security violations, and only by authorized persons.
O.HDD.ENCRYPTION	The TOE shall encrypt User Data and TSF Data, when
	the TOE stores them in HDD.

## 4.2. Security Objectives for the operational environment

This section describes the security objectives that must be fulfilled by operational environment of the TOE.

Objective	Definition
OE.PHYSICAL.MANAGED	The TOE shall be placed in a secure or monitored area that
	provides protection from unmanaged physical access to the
	TOE.
OE.USER.AUTHORIZED	The TOE Owner shall grant permission to Users to be
	authorized to use the TOE according to the security policies
	and procedures of their organization.
OE.USER.TRAINED	The TOE Owner shall ensure that Users are aware of the
	security policies and procedures of their organization, and
	have the training and competence to follow those policies
	and procedures.
OE.ADMIN.TRAINED	The TOE Owner shall ensure that TOE Administrators are
	aware of the security policies and procedures of their
	organization, have the training, competence, and time to
	follow the manufacturer's guidance and documentation,
	and correctly configure and operate the TOE in accordance
	with those policies and procedures.
OE.ADMIN.TRUSTED	The TOE Owner shall establish trust that TOE
	Administrators will not use their privileged access rights for
	malicious purposes.
OE.AUDIT.REVIEWED	The TOE Owner shall ensure that audit logs are reviewed at
	appropriate intervals for security violations or unusual
	patterns of activity.

## Table 4-2 Security objectives for the operational environment

Objective	Definition	
OE.INTERFACE.MANAGED	The IT environment shall provide protection from	
	unmanaged access to TOE external interfaces.	

#### 4.3. Security Objectives rationale

This section demonstrates that each threat, organizational security policy, and assumption, are mitigated by at least one Security Objective for the TOE, and that those Security Objectives counter the threats, enforce the policies, and uphold the assumptions.

	Objectives																			
Threats, Policies and Assumptions	0.DOC.NO_DIS	0.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	OE.USER.AUTHORIZED	O.SOFTWARE.VERIFIED	0.AUDIT.LOGGED	0.AUDIT_STORAGE.PROTECTED	0.AUDIT_ACCESS.AUTHORIZED	OE.AUDIT.REVIEWED	0.INTERFACE.MANAGED	OE.PHYISCAL.MANAGED	OE.INTERFACE.MANAGED	DE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	OE.USER.TRAINED	O.HDD.ENCRYPTION
T.DOC.DIS	√	0	0	0	0	0	√	√	0	0	0	0	0	0	0	0	0	0	0	0
T.DOC.ALT		$\checkmark$					✓	✓												
T.FUNC.ALT			$\checkmark$				✓	✓												
T.PROT.ALT				$\checkmark$			✓	✓												
T.CONF.DIS					~		~	✓												
T.CONF.ALT						✓	✓	$\checkmark$												
P.USER.AUTHORIZATION							$\checkmark$	$\checkmark$												
P.SOFTWARE.VERIFICATION									$\checkmark$											
P.AUDIT.LOGGING										✓	✓	✓	✓							
P.INTERFACE.MANAGEMENT														✓		$\checkmark$				
A.ACCESS.MANAGED															✓					
A.ADMIN.TRAINING																	$\checkmark$			
A.ADMIN.TRUST																		$\checkmark$		

#### Table 4-3 Completeness of security objectives

© 2021 KYOCERA Document Solutions Inc.

										Ob	jecti	ves								
Threats, Policies and Assumptions A.USER.TRAINING	0.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	OE.USER.AUTHORIZED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	O.AUDIT_STORAGE.PROTECTED	O.AUDIT_ACCESS.AUTHORIZED	OE.AUDIT.REVIEWED	O.INTERFACE.MANAGED	OE.PHYISCAL.MANAGED	OE.INTERFACE.MANAGED	OE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	<ul> <li>OE.USER.TRAINED</li> </ul>	O.HDD.ENCRYPTION
P.HDD.ENCRYPTION																				$\checkmark$

Threats, Policies	Summary	Objectives and rationale
and Assumptions		
T.DOC.DIS	User Document Data may	O.DOC.NO_DIS protects D.DOC from
	be disclosed to	unauthorized disclosure
	unauthorized persons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.DOC.ALT	User Document Data may	O.DOC.NO_ALT protects D.DOC from
	be altered by unauthorized	unauthorized alteration
	persons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.FUNC.ALT	User Function Data may be	O.FUNC.NO_ALT protects D.FUNC
	altered by unauthorized	from unauthorized alteration

## Table 4-4Sufficiency of security objectives

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

per	rsons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.PROT.ALT TSF	Protected Data may be	O.PROT.NO_ALT protects D.PROT from
alte	ered by unauthorized	unauthorized alteration
per	rsons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.CONF.DIS TSF	- Confidential Data may	O.CONF.NO_DIS protects D.CONF from
be	disclosed to	unauthorized disclosure
una	authorized persons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.CONF.ALT TSF	- Confidential Data may	O.CONF.NO_ALT protects D.CONF
be	altered by unauthorized	from unauthorized alteration
per	rsons	O.USER.AUTHORIZED establishes user
		identification and authentication as
		the basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
P.USER.AUTHORIZ Use	ers will be authorized to	O.USER.AUTHORIZED establishes user
ATION use	e the TOE	identification and authentication as
		the basis for authorization to use the
		TOE
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to

		1
P.SOFTWARE.VERI	Procedures will exist to	O.SOFTWARE.VERIFIED provides
FICATION	self-verify executable code	procedures to self-verify executable
	in the TSF	code in the TSF
P.AUDIT.LOGGING	An audit trail of TOE use	O.AUDIT.LOGGED creates and
	and security-relevant	maintains a log of TOE use and
	events will be created,	security-relevant events, and prevents
	maintained, protected, and	unauthorized disclosure or alteration
	reviewed by the TOE and	O.AUDIT_STORAGE.PROTECTED
	its IT environment.	protects audit records from
		unauthorized access, deletion and
		modifications
		O.AUDIT_ACCESS.AUTHORIZED
		provides appropriate access to audit
		records only by authorized persons.
		OE.AUDIT.REVIEWED establishes
		responsibility of the TOE Owner to
		ensure that audit logs are
		appropriately reviewed
P.INTERFACE.MAN	Operation of external	O.INTERFACE.MANAGED manages the
AGEMENT	interfaces will be controlled	operation of external interfaces in
	by the TOE and its IT	accordance with security policies
	environment.	OE.INTERFACE.MANAGED establishes
		a protected environment for TOE
		external interfaces
P.HDD.ENCRYPTIO	User Data and TSF Data	O.HDD.ENCRYPTION encrypts User
Ν	stored in HDD will be	Data and TSF Data stored in HDD by
	encrypted by the TOE.	TOE
A.ACCESS.MANAG	The TOE environment	OE.PHYSICAL.MANAGED establishes a
ED	provides protection from	protected physical environment for
	unmanaged access to the	the TOE
	physical components and	
	data interfaces of the TOE.	
A.ADMIN.TRAININ	TOE Users are aware of and	OE.ADMIN.TRAINED establishes
G	trained to follow security	responsibility of the TOE Owner to
	policies and procedures	provide appropriate Administrator
		training.

A.ADMIN.TRUST	Administrators do not use	OE.ADMIN.TRUSTED establishes
	their privileged access	responsibility of the TOE Owner to
	rights for malicious	have a trusted relationship with
	purposes.	Administrators.
A.USER.TRAINING	Administrators are aware	OE.USER.TRAINED establishes
	of and trained to follow	responsibility of the TOE Owner to
	security policies and	provide appropriate User training.
	procedures	

# 5. Extended Components Definition

This ST defines components that are extensions to Common Criteria 3.1 Release 3, Part 2. These extended components are defined in the ST but are used in SFR Packages, and therefore, are employed only in TOEs whose STs conform to those SFR Packages.

5.1. FPT\_FDI\_EXP Restricted forwarding of data to external interfaces

# Family behaviour:

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT\_FDI\_EXP has been defined to specify this kind of functionality.

# **Component leveling:**

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces		1	
--	--	---	--

FPT\_FDI\_EXP.1 Restricted forwarding of data to external interfaces, provides for the functionality to require TSF controlled processing of data received over defined external interfaces before this data is sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

# Management: FPT\_FDI\_EXP.1

The following actions could be considered for the management functions in FMT:

- a) Definition of the role(s) that are allowed to perform the management activities;
- b) Management of the conditions under which direct forwarding can be allowed by an administrative role;
- c) Revocation of such an allowance.

#### Audit: FPT\_FDI\_EXP.1

The following actions should be auditable if FAU\_GEN Security Audit Data Generation is included in the PP/ST:

There are no auditable events foreseen.

#### **Rationale:**

Quite often a TOE is supposed to perform specific checks and process data received on one external interface before such (processed) data is allowed to be transferred to another external interface. Examples are firewall systems but also other systems that require a specific work flow for the incoming data before it can be transferred. Direct forwarding of such data (i. e. without processing the data first) between different external interfaces is therefore a function that – if allowed at all – can only be allowed by an authorized role.

It has been viewed as useful to have this functionality as a single component that allows specifying the property to disallow direct forwarding and require that only an authorized role can allow this. Since this is a function that is quite common for a number of products, it has been viewed as useful to define an extended component.

The Common Criteria defines attribute-based control of user data flow in its FDP class. However, in the Protection Profile, the authors needed to express the control of both user data and TSF data flow using administrative control instead of attribute-based control. It was found that using FDP\_IFF and FDP\_IFC for this purpose resulted in SFRs that were either too implementation-specific for a Protection Profile or too unwieldy for refinement in a Security Target. Therefore, the authors decided to define an extended component to address this functionality.

This extended component protects both user data and TSF data, and could therefore be placed in either the FDP or FPT class. Since its purpose is to protect the TOE from misuse, the authors believed that it was most appropriate to place it in the FPT class. It did not fit well in any of the existing families in either class, and this lead the authors to define a new family with just one member.

#### FPT\_FDI\_EXP.1 Restricted forwarding of data to external interfaces

Hierarchical to:No other components.Dependencies:FMT\_SMF.1 Specification of Management Functions

FMT\_SMR.1 Security roles.

**FPT\_FDI\_EXP.1.1** The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].

# 6. Security Requirements

This section describes the TOE Security Functional Requirements.

6.1. TOE Security Functional Requirements.

	FAU_GEN.1 Audit data generation
	Hierarchical to: No other components. Dependencies: FPT_STM.1 Reliable time stamps
FAU_GEN.1.1	The TSF shall be able to generate an audit record of the following auditable events: - Start-up and shutdown of the audit functions;
	<ul> <li>All auditable events for the [selection, choose one of: minimum, basic, detailed, not specified] level of audit; and</li> </ul>
	<ul> <li>all Auditable Events as each is defined for its Audit Level (if one is specified) for the Relevant SFR in Table 6-1; [assignment: other specifically defined auditable events].</li> </ul>
	<ul> <li>[selection, choose one of: <i>minimum, basic, detailed, not specified</i>]</li> <li>not specified</li> </ul>
	<ul> <li>[assignment: other specifically defined auditable events]</li> <li>None</li> </ul>
FAU_GEN.1.2	<ul> <li>The TSF shall record within each audit record at least the following information:</li> <li>Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and</li> </ul>
	<ul> <li>For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, for each Relevant SFR listed in Table 6-1: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional Information (if any is required); [assignment: other audit relevant information].</li> </ul>

[assignment: other audit relevant information]

• None

Relevant SFR	Auditable event	Additional information	Actions to be audited (defined by CC or PP)
FAU_GEN.1	-	-	There are no auditable events foreseen.
FAU_GEN.2	-	-	There are no auditable events foreseen.
FAU_SAR.1	[Not specified] -	-	<ul> <li>a) Basic: Reading of information from the audit records.</li> </ul>
FAU_SAR.2	[Not specified] -	-	<ul> <li>a) Basic: Unsuccessful attempts to read information from the audit records.</li> </ul>
FAU_STG.1	-	-	There are no auditable events foreseen.
FAU_STG.4	[Not specified] -	-	a) Basic: Actions taken due to the audit storage failure.
FCS_CKM.1(a)	[Not specified] -	-	<ul> <li>a) Minimum: Success and failure of the activity.</li> <li>b) Basic: The object attribute(s), and object value(s) excluding any sensitive information (e.g. secret or private keys).</li> </ul>
FCS_CKM.1(b)	[Not specified] -	-	<ul> <li>a) Minimum: Success and failure of the activity.</li> <li>b) Basic: The object attribute(s), and object value(s) excluding any sensitive information (e.g. secret or private keys).</li> </ul>
FCS_CKM.1(c)	[Not specified] -	-	<ul> <li>a) Minimum: Success and failure of the activity.</li> <li>c) Basic: The object attribute(s), and object value(s) excluding any</li> </ul>

# Table 6-1 Auditable data requirements

			sensitive information (e.g. secret or private keys).
FCS_COP.1(a)	[Not specified] -	-	a) Minimum: Success and failure, and the type of cryptographic operation.
			<ul> <li>b) Basic: Any applicable cryptographic mode(s) of operation, subject attributes and object attributes.</li> </ul>
FCS_COP.1(b)	[Not specified] -	-	a) Minimum: Success and failure, and the type of
			<ul> <li>cryptographic operation.</li> <li>b) Basic: Any applicable</li> <li>cryptographic mode(s) of</li> <li>operation, subject</li> <li>attributes and object</li> </ul>
			attributes.
FCS_COP.1(c)	[Not specified]	-	a) Minimum: Success and
	-		failure, and the type of
			cryptographic operation.
			<ul> <li>b) Basic: Any applicable cryptographic mode(s) of</li> </ul>
			operation, subject
			attributes and object
			attributes.
FDP_ACC.1(a)	-	-	There are no auditable
			events foreseen.
FDP_ACF.1(a)	[Not specified]	Type of job	a) Minimum: Successful
	Successful requests to perform an		requests to perform an
	operation on an object as the		operation on an object
	following:		covered by the SFP.
			b) Basic: All requests to
	D.DOC: Read		perform an operation on
	• D.DOC: Delete		an object covered by the SFP.
			c) Detailed: The specific
	D.FUNC: Read		security attributes used in
			making an access check.

	D.FUNC: Modify		
	• D.FUNC: Delete		
FDP_ACC.1(b)	-	-	There are no auditable
			events foreseen.
FDP_ACF.1(b)	[Not specified]		<ul> <li>a) Minimum: Successful requests to perform an operation on an object covered by the SFP.</li> <li>b) Basic: All requests to perform an operation on an object covered by the SFP.</li> <li>c) Detailed: The specific security attributes used in</li> </ul>
			making an access check.
FDP_RIP.1	-	-	There are no auditable events foreseen.
FIA_AFL.1	<ul> <li>[Minimum]</li> <li>The following actions taken, when reaching of the threshold for the unsuccessful authentication attempts since the last successful authentication.</li> <li>Perform user account lockout, and the following action taken to restore to the normal state.</li> <li>Release the lockout state by a device administrator.</li> </ul>	-	a) Minimum: the reaching of the threshold for the unsuccessful authentication attempts and the actions (e.g. disabling of a terminal) taken and the subsequent, if appropriate, restoration to the normal state (e.g. re-enabling of a terminal).
FIA_ATD.1	-	-	There are no auditable events foreseen.
FIA_SOS.1	[Minimum] Rejection by the tested secrete as shown below:		<ul> <li>a) Minimum: Rejection by the TSF of any tested secret;</li> </ul>

	<ul> <li>Rejection by quality check of the login user password, which was imputed when initially creating the user information.</li> <li>Rejection by quality check of the login user password, which was changed when editing the user information.</li> </ul>		<ul> <li>b) Basic: Rejection or acceptance by the TSF of any tested secret;</li> <li>c) Detailed: Identification of any changes to the defined quality metrics.</li> </ul>
FIA_UAU.1	[Basic] Both successful and unsuccessful use of the authentication mechanism	None required	Defined by PP: Both successful and unsuccessful use of the authentication mechanism
FIA_UAU.7	-	-	There are no auditable events foreseen.
FIA_UID.1	[Basic] Both successful and unsuccessful use of the identification mechanism	Attempted user identity	Defined by PP: Both successful and unsuccessful use of the identification mechanism
FIA_USB.1	[Not specified] -	-	<ul> <li>a) Minimum: Unsuccessful binding of user security attributes to a subject (e.g. creation of a subject).</li> <li>b) Basic: Success and failure of binding of user security attributes to a subject (e.g. success or failure to create a subject).</li> </ul>
FMT_MSA.1(a)	[Not specified] -	-	<ul> <li>a) Basic: All modifications of the values of security attributes.</li> </ul>
FMT_MSA.3(a)	[Not specified] -	-	<ul> <li>a) Basic: Modifications of the default setting of permissive or restrictive rules.</li> <li>b) Basic: All modifications of</li> </ul>

			the initial values of security attributes.
FMT_MSA.1(b)	[Not specified]	-	a) Basic: All modifications of
	-		the values of security
			attributes.
FMT_MSA.3(b)	[Not specified]	-	a) Basic: Modifications of
_ 、,	-		the default setting of
			permissive or restrictive
			rules.
			b) Basic: All modifications of
			the initial values of
			security attributes.
FMT_MTD.1(a)	[Not specified]	-	a) Basic: All modifications to
	-		the values of TSF data.
FMT_MTD.1(b)	[Not specified]	-	a) Basic: All modifications to
	-		the values of TSF data.
FMT_SMF.1	[Minimum]	None required	Defined by PP:
	Use of the management functions		Use of the management
			functions
FMT_SMR.1	[Minimum]	None required	Defined by PP:
	Modifications to the group of		Modifications to the group of
	users that are part of a role		users that are part of a role
FPT_STM.1	[Minimum]	None required	Defined by PP:
	Changes to the time		Changes to the time
FPT_TST.1	[Not specified]	-	a) Basic: Execution of the
	-		TSF self tests and the
			results of the tests.
FPT_FDI_EXP.1	-	-	There are no auditable
			events foreseen.
FTA_SSL.3	[Minimum]	None required	Minimal: Termination of an
	Termination of an interactive		interactive session by the
	session by the session locking		session locking mechanism.
	mechanism		
FTP_ITC.1	[Minimum]	The destination IP	Defined by PP:
	Failure of the trusted channel	address of failure	Failure of the trusted channel
	functions	of the trusted	functions
		channel functions.	a) Identification of the
		(No need to obtain	initiator and target of
		the sender's IP	failed trusted channel

	address, because	functions.
	the sender is TOE	
	itself and so the	
	sender's IP	
	address has been	
	fixed already.)	

#### FAU\_GEN.2 User identify association

Hierarchical to:	No other components.
Dependencies:	FAU_GEN.1 Audit data generation
	FIA_UID.1 Timing of identification

**FAU\_GEN.2.1** For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

#### FAU\_SAR.1 Audit review

Hierarchical to: No other components.Dependencies: FAU\_GEN.1 Audit data generation

**FAU\_SAR.1.1** The TSF shall provide [assignment: *authorised users*] with the capability to read [assignment: *list of audit information*] from the audit records.

[assignment: authorised users]

• U.ADMINISTRATOR

[assignment: list of audit information]

- Information as shown in the "Auditable event" column and "Additional information" column of "Table 6-1 Auditable data requirements".
- **FAU\_SAR.1.2** The TSF shall provide the audit records in a manner suitable for the user to interpret the information.

#### FAU\_SAR.2 Restricted audit review

Hierarchical to: No other components.Dependencies: FAU\_SAR.1 Audit review

**FAU\_SAR.2.1** The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.

#### FAU\_STG.1 Protected audit trail storage

Hierarchical to: No other components.Dependencies: FAU\_GEN.1 Audit data generation

- **FAU\_STG.1.1** The TSF shall protect the stored audit records in the audit trail from unauthorized deletion.
- **FAU\_STG.1.2** The TSF shall be able to [selection, choose one of: prevent, detect] unauthorized modifications to the stored audit records in the audit trail.

[selection: choose one of: prevent, detect]

prevent

#### FAU\_STG.4 Prevention of audit data loss

Hierarchical to:FAU\_STG.3 Action in case of possible audit data lossDependencies:FAU\_STG.1 Protected audit trail storage

**FAU\_STG.4.1** The TSF shall [selection, choose one of: "ignore audited events", "prevent audited events, except those taken by the authorised user with special rights", "overwrite the oldest stored audit records"] and [assignment: other actions to be taken in case of audit storage failure] if the audit trail is full.

[selection: choose one of: "ignore audited events", "prevent audited events, except those taken by the authorised user with special rights", "overwrite the oldest stored audit records"]

"overwrite the oldest stored audit records"

[assignment: other actions to be taken in case of audit storage failure]

None

#### 6.1.2. Class FCS: Cryptographic Support

#### FCS\_CKM.1(a) Cryptographic key generation (Storage Encryption)

Hierarchical to:No other components.Dependencies:[FCS\_CKM.2 Cryptographic key distribution, or<br/>FCS\_COP.1 Cryptographic operation]<br/>FCS\_CKM.4 Cryptographic key destruction

**FCS\_CKM.1.1(a)** The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

[assignment: cryptographic key generation algorithm]

• KDF(Feedback Mode)

[assignment: cryptographic key sizes]

• 256 bits

[assignment: list of standards]

• NIST SP800-108

#### FCS\_CKM.1(b) Cryptographic key generation (TLS)

Hierarchical to: No other components. Dependencies: [FCS\_CKM.2 Cryptographic key distribution, or FCS\_COP.1 Cryptographic operation] FCS\_CKM.4 Cryptographic key destruction

FCS\_CKM.1.1(b) The TSF shall generate cryptographic keys in accordance with a specified

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

cryptographic key generation algorithm [multiple primitives described below] and specified cryptographic key sizes [as described below] that meet the following: [multiple standards as described below].

Algorithm	Key sizes	Standards
RSA	2048, 4096 bits	FIPS 186-4, Appendix B
AES	128, 256 bits	FIPS 197
ChaCha20-Poly1305	256 bits	RFC8439
TLS key generation	AES 128, 256 bits	SP 800-135 Rev.1
via DHE or ECDHE		
TLS key generation	HMAC 160, 256, 384	SP 800-135 Rev.1
via DHE or ECDHE	bits	

Table 6-2 Key Generation

#### FCS\_CKM.1(c) Cryptographic key generation (IPSec)

Hierarchical to:	No other components.		
Dependencies:	[FCS_CKM.2 Cryptographic key distribution, or		
	FCS_COP.1 Cryptographic operation]		
	FCS_CKM.4 Cryptographic key destruction		

FCS\_CKM.1.1(c) The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] implement [assignment: Diffie-Hellman Groups] that meet the following: [assignment: list of standards].

[assignment: cryptographic key generation algorithm]

• IKEv1KDF

[assignment: Diffie-Hellman Groups]

• Diffie-Hellman Group 14, 16, 17, 18, 19, 20, 21, 22, 23, 24

[assignment: list of standards]

• SP 800-135 Rev.1, RFC 2409, RFC 5114

#### FCS\_COP.1(a) Cryptographic operation (Storage Encryption)

Hierarchical to:No other components.Dependencies:[FDP\_ITC.1 Import of user data without security attributes, or<br/>FDP\_ITC.2 Import of user data with security attributes, or<br/>FCS\_CKM.1 Cryptographic key generation]<br/>FCS\_CKM.4 Cryptographic key destruction

FCS\_COP.1.1(a) The TSF shall perform [assignment: list of cryptographic operations] in accordance with a specified cryptographic algorithm [assignment: cryptographic algorithm] and cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

[assignment: list of cryptographic operations]

- Encryption of D.DOC, D.FUNC, D.PROT and D.CONF when writing into the HDD
- Decryption of D.DOC, D.FUNC, D.PROT and D.CONF when reading out from the HDD

[assignment: cryptographic algorithm]

• AES (XTS mode)

[assignment: cryptographic key sizes]

• 256 bits

[assignment: list of standards]

• FIPS PUB 197, SP800-38E

# FCS\_COP.1(b) Cryptographic operation (TLS)

Hierarchical to:	No other components.		
Dependencies:	[FDP_ITC.1 Import of user data without security attributes, or		
	FDP_ITC.2 Import of user data with security attributes, or		
	FCS_CKM.1 Cryptographic key generation]		
	FCS_CKM.4 Cryptographic key destruction		

**FCS\_COP.1.1(b)** The TSF shall perform [the operations listed in the table below] in accordance with a specified cryptographic algorithm [multiple algorithms described below] and cryptographic key sizes [as described below] that meet the following: [multiple standards as described below].

Operations	Algorithm	Key/Hash Size in Bits	Standards
Encryption,	AES (CBC mode)	128, 256 bits	FIPS 197
decryption	AES (GCM mode)		SP800-38A
			SP800-38D
	ChaCha20-Poly1305	256 bits	RFC8439
Cryptographic	Cryptographic RSA Digital Signature		PKCS #1 v2.2
Signature	ignature Algorithm		FIPS 186-4
Services	(RSASSA-PKCS1-v1_5)		
Hashing	SHA-1	160 bits	FIPS 180-4
	SHA-256, SHA-384	256, 384 bits	FIPS 180-4
Keyed Hash	HMAC-SHA-1	160 bits	RFC2104
Message	HMAC-SHA-256,	256, 384 bits	
Authentication	HMAC-SHA-384		
Code			

#### FCS\_COP.1(c) Cryptographic operation (IPSec)

Hierarchical to:	No other components.
Dependencies:	[FDP_ITC.1 Import of user data without security attributes, or
	FDP_ITC.2 Import of user data with security attributes, or
	FCS_CKM.1 Cryptographic key generation]
	FCS_CKM.4 Cryptographic key destruction

**FCS\_COP.1.1(c)** The TSF shall perform [the operations listed in the table below] in accordance with a specified cryptographic algorithm [multiple algorithms described below] and cryptographic key sizes [as described below] that meet the following: [multiple standards as described below].

Operations	Algorithm	Key/Hash	Standards
		Size in Bits	
ISAKMP authentication	Pre-shared key	-	RFC 2409
			SP800-77 Rev.1
Hashing	SHA-256, SHA-384,	256, 384,	FIPS 180-4
	SHA-512	512 bits	
Data authentication	HMAC-SHA256-128	256 bits	RFC2104
	HMAC-SHA384-192	384 bits	RFC 4868
	HMAC-SHA512-256	512 bits	
Encryption, decryption	3DES (CBC mode)	168 bits	FIPS 46-3
			SP 800-67 Rev.2
	AES (CBC mode)	128, 192,	FIPS 197
		256 bits	SP800-38A

#### Table 6-4 Cryptographic Operations

6.1.3. Class FDP: User Data Protection

#### FDP\_ACC.1 (a) Subset access control

Hierarchical to: No other components.Dependencies: FDP\_ACF.1 Security attribute based access control

FDP\_ACC.1.1 (a) The TSF shall enforce the User Data Access Control SFP in Table 6-5 on the list of users as subjects, objects, and operations among subjects and objects covered by the User Data Access Control SFP in Table 6-5.

Hierarchical to:No other components.Dependencies:FDP\_ACC.1 Subset access controlFMT\_MSA.3 Static attribute initialisation

FDP\_ ACF.1.1 (a) The TSF shall enforce the User Data Access Control SFP in Table 6-5 to objects based on the following: the list of users as subjects and objects controlled under the User Data Access Control SFP in Table 6-5, and for each, the indicated security attribute in Table 6-5.

- FDP\_ ACF.1.2 (a) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: rules specified in the User Data Access Control SFP in Table 6-5 governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects.
- **FDP\_ACF.1.3 (a)** The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: *rules, based on security attributes, that explicitly authorise access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

• Explicitly authorize access control rule as shown in Table 6-6

**FDP\_ACF.1.4 (a)** The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None

Object (Security attribute)	Attribute	Operation(s)	Subject (Security attribute)	Access control rule
D.DOC (Owner Information)	+PRT,+SCN,+CPY ,+FAXOUT	Read, Delete	U.NORMAL (Login User Name)	Denied, except for his/her own documents. When "Owner Information" of D.DOC matches "Login User Name" of U. NORNAL, operation is permitted.
D.DOC (Box Owner, Box Permission)	+DSR	Read, Delete	U.NORMAL (Login User Name)	Denied, except (1) for his/her own documents, or (2) if authorized by another role or mechanism if such functions are provided by a conforming TOE. (1) When "Owner Information" of D.DOC matches "Login User Name" of U. NORNAL, operation is permitted. (2)When "Box Permission" storing D.DOC is enabled, operation is permitted.
D.DOC (Owner Information)	+FAXIN	[assignment: other operations] Any Operations	U.NORMAL (Login User Name)	Denied. Any Operations by U.NORMAL is denied.
D.FUNC (Owner Information)	N/A	Read, Modify, Delete	U.NORMAL (Login User Name)	Denied, except for his/her own function data. When "Owner Information "of D.FUNC matches "Login User Name" of U. NORNAL, operation is permitted.

#### Table 6-5 User Data Access Control SFP

Object	Attribute	Operation(s)	Subject	Explicitly authorize access
(Security			(Security attribute)	control rule
attribute)				
D.DOC	+PRT	Delete	U.ADMINISTRATOR	Regardless of "Owner
(Owner			(User Authorization)	Information" value, operation
Information)				is permitted.
D.DOC	+SCN	Delete	U.ADMINISTRATOR	Regardless of "Owner
(Owner			(User Authorization)	Information" value, operation
Information)				is permitted.
D.DOC	+CPY	Delete	U.ADMINISTRATOR	Regardless of "Owner
(Owner			(User Authorization)	Information" value, operation
Information)				is permitted.
D.DOC	+FAXOUT	Delete	U.ADMINISTRATOR	Regardless of "Owner
(Owner			(User Authorization)	Information" value, operation
Information)				is permitted.
D.DOC	+DSR	Read, Delete	U.ADMINISTRATOR	Regardless of "Box Owner"
(Box Owner)			(User Authorization)	value, operation is permitted.
D.DOC	+FAXIN	Read, Delete	U.ADMINISTRATOR	Regardless of "Owner
(Owner			(User Authorization)	Information" value, operation
Information)				is permitted.
D.FUNC	N/A	Read,	U.ADMINISTRATOR	Regardless of "Owner
(Owner		Modify,	(User Authorization)	Information" value, operation
Information)		Delete		is permitted.

# Table 6-6 User Data Access Control SFP for U.ADMINISTRATOR

#### FDP\_ACC.1 (b)Subset access control

Hierarchical to:No other components.Dependencies:FDP\_ACF.1 Security attribute based access control

FDP\_ACC.1.1 (b) The TSF shall enforce the TOE Function Access Control SFP in Table 6-7 on users as

subjects, TOE functions as objects, and the right to use the functions as operations.

FDP\_ACF.1 (b) Security attribute based access control

Hierarchical to:	No other components.
Dependencies:	FDP_ACC.1 Subset access control
	FMT_MSA.3 Static attribute initialisation

FDP\_ACF.1.1 (b) The TSF shall enforce the TOE Function Access Control SFP to objects based on the following: users and [assignment: list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP].

# [assignment: list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP]

• Function(s) listed in "Object "column and security attributes listed in "security attribute", respectively as shown in Table 6-7.

FDP\_ ACF.1.2(b) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: [selection: the user is explicitly authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the TOE is automatically authorized to use the functions [assignment: list of functions], [assignment: other conditions]].

[selection: the user is explicitly authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the TOE is automatically authorized to use the functions [assignment: list of functions], [assignment: other conditions]]

- [assignment: other conditions]
- [assignment: other conditions]
- Rules as shown in Table 6-7
- FDP\_ACF.1.3 (b) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

None

**FDP\_ACF.1.4 (b)** The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None

Object (Security attribute)	Operation	Subject (Security attribute)	Access control rule
F.CPY (Executable Attribute)	Job Execution	U.ADMINISTRATOR U.NORMAL (Job Authorization Settings)	When the executable attribute of Object is included in job authorization settings that Subject have, operation is permitted.
F.PRT (Executable Attribute)	Job Execution	U.ADMINISTRATOR U.NORMAL (Job Authorization Settings)	When the executable attribute of Object is included in job authorization settings that Subject have, operation is permitted.
F.SCN (Executable Attribute)	Job Execution	U.ADMINISTRATOR U.NORMAL (Job Authorization Settings)	When the executable attribute of Object is included in job authorization settings that Subject have, operation is permitted.
F.FAX (Executable Attribute)	Job Execution	U.ADMINISTRATOR U.NORMAL (Job Authorization Settings)	When the executable attribute of Object is included in job authorization settings that Subject have, operation is permitted.
F.DSR (Executable Attribute)	Job Execution	U.ADMINISTRATOR U.NORMAL (Job Authorization Settings)	When the executable attribute of Object is included in job authorization settings that Subject have, operation is permitted.

# Table 6-7 TOE Function Access Control SFP

#### FDP\_RIP.1 Subset residual information protection

Hierarchical to:No other components.Dependencies:No dependencies.

**FDP\_RIP.1.1** The TSF shall ensure that any previous information content of a resource is made unavailable upon the [selection: *allocation of the resource to, deallocation of the resource from*] the following objects: **D.DOC,** [assignment: *list of objects*].

[selection: allocation of the resource to, deallocation of the resource from]

• deallocation of the resource from

[assignment: list of objects]

None

6.1.4. Class FIA: Identification and Authentication

FIA_AFL.1	Authentication failure handling
-----------	---------------------------------

Hierarchical to: No other components. Dependencies: FIA\_UAU.1 Timing of authentication

FIA\_AFL.1.1 The TSF shall detect when [selection: [assignment: positive integer number], an administrator configurable positive integer within [assignment: range of acceptable values]] unsuccessful authentication attempts occur related to [assignment: list of authentication events].

[selection: [assignment: positive integer number], an administrator configurable positive integer within [assignment: range of acceptable values]]

• an administrator configurable positive integer within [assignment: range of acceptable values]

[assignment: range of acceptable values]

• 1 to 10

[assignment: list of authentication events]

- Consecutive unsuccessful authentication attempts since the last successful authentication occur related to login user name designated by login from an operational panel.
- Consecutive unsuccessful authentication attempts since the last successful

authentication occur related to login user name designated by login from a client PC.

**FIA\_AFL.1.2** When the defined number of unsuccessful authentication attempts has been [selection: *met, surpassed*], the TSF shall [assignment: *list of actions*].

[selection: *met, surpassed*]

• met

[assignment: *list of actions*]

• Login from the account is locked out between 1 and 60 minutes and until the time designated by a device administrator that elapse, or until a device administrator releases lock status.

FIA\_ATD.1 User attribute definition

Hierarchical to: No other components.Dependencies: No dependencies.

**FIA\_ATD.1.1** The TSF shall maintain the following list of security attributes belonging to individual users: [assignment: *list of security attributes*].

[assignment: list of security attributes]

• Login User Name, User Authorization, Job Authorization Setting

#### FIA\_SOS.1 Verification of secrets

Hierarchical to:No other components.Dependencies:No dependencies.

**FIA\_SOS.1.1** The TSF shall provide a mechanism to verify that secrets meet [assignment: *a defined quality metric*].

[assignment: *a defined quality metric*]

• Password Length : At least 8 characters

• Character Type : Alphanumeric or special characters

#### FIA\_UAU.1 Timing of authentication

Hierarchical to: No other components.Dependencies: FIA\_UID.1 Timing of identification

FIA\_UAU.1.1The TSF shall allow [assignment: list of TSF-mediated actions that do not conflict with<br/>access-controlled Functions of the TOE] on behalf of the user to be performed before<br/>the user is authenticated.

[assignment: *list of TSF-mediated actions* that do not conflict with access-controlled Functions of the TOE]

- Obtain a device status
- Display a list of job information
- Display counter information
- Receive FAX data
- **FIA\_UAU.1.2** The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

#### FIA\_UAU.7 Protected authentication feedback

Hierarchical to:No other components.Dependencies:FIA\_UAU.1 Timing of authentication

**FIA\_UAU.7.1** The TSF shall provide only [assignment: *list of feedback*] to the user while the authentication is in progress.

[assignment: *list of feedback*]

dummy characters (\*: asterisk)

# FIA\_UID.1 Timing of identification

Hierarchical to: No other components.Dependencies: No dependencies.

FIA\_UID.1.1The TSF shall allow [assignment: list of TSF-mediated actions that do not conflict with<br/>access-controlled Functions of the TOE] on behalf of the user to be performed before<br/>the user is identified.

[assignment: *list of TSF-mediated actions* that do not conflict with access-controlled Functions of the TOE]

- Obtain a device status
- Display a list of job information
- Display counter information
- Receive FAX data
- **FIA\_UID.1.2** The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

# FIA\_USB.1 User-subject binding

Hierarchical to: No other components.Dependencies: FIA\_ATD.1 User attribute definition

**FIA\_USB.1.1** The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [assignment: *list of user security attributes*].

[assignment: list of user security attributes]

- Login User Name, User Authorization, Job Authorization Setting
- **FIA\_USB.1.2** The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users: [assignment: *rules for the initial*

association of attributes].

[assignment: rules for the initial association of attributes]

- None
- **FIA\_USB.1.3** The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: [assignment: *rules for the changing of attributes*].

[assignment: rules for the changing of attributes]

None

#### 6.1.5. Class FMT: Security Management

	FMT_MSA.1 (a) Management of security attributes
	Hierarchical to:No other components.Dependencies:[FDP_ACC.1 Subset access control, orFDP_IFC.1 Subset information flow control]FMT_SMR.1 Security rolesFMT_SMF.1 Specification of Management Functions
FMT_MSA.1.1 (	<ul> <li>a) The TSF shall enforce the User Data Access Control SFP in Table 6-5, [assignment: access control SFP(s), information flow control SFP(s)] to restrict the ability to [selection: change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorised identified roles].</li> <li>[assignment: access control SFP(s), information flow control SFP(s)]</li> <li>None</li> </ul>
	<ul> <li>[selection: change_default, query, modify, delete, [assignment: other operations]]</li> <li>Operation(s) as listed in Table 6-8</li> </ul>
	<ul> <li>[assignment: list of security attributes]</li> <li>Security Attributes as listed in Table 6-8</li> </ul>
	<ul> <li>[assignment: the authorised identified roles]</li> <li>Role as listed in Table 6-8</li> </ul>

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

Security Attributes	Operation(s)	Role
Box Owner	modify	U.ADMINISTRATOR
Box Permission	modify	U.ADMINISTRATOR
		U.NORMAL that
		matches a Box
		Owner.
Owner Information	modify	U.ADMINISTRATOR

#### Table 6-8Management of security attributes

FMT_MSA.3 (a	a) Static attribute initialisation
	No other components. FMT_MSA.1 Management of security attributes FMT SMR.1 Security roles

FMT\_MSA.3.1 (a) The TSF shall enforce the User Data Access Control SFP in Table 6-5, [assignment: access control SFP, information flow control SFP] to provide [selection, choose one of: restrictive, permissive, [assignment: other property]] default values for security attributes that are used to enforce the SFP.

[assignment: access control SFP, information flow control SFP]

None

[selection, choose one of: restrictive, permissive, [assignment: other property]]

• restrictive

FMT\_MSA.3.2 (a) The TSF shall allow the [assignment: the authorized identified roles] to specify alternative initial values to override the default values when an object or information is created.

[assignment: the authorized identified roles]

nobody

	FMT_MSA.1 (b) Management of security attributes
	Hierarchical to: No other components.
	Dependencies: [FDP_ACC.1 Subset access control, or
	FDP_IFC.1 Subset information flow control]
	FMT_SMR.1 Security roles
	FMT_SMF.1 Specification of Management Functions
MT_MSA.1.1	(b) The TSF shall enforce the TOE Function Access Control SFP, [assignment: access
	control SFP(s), information flow control SFP(s)] to restrict the ability to [selection:
	change_default, query, modify, delete, [assignment: other operations]] the security
	attributes [assignment: list of security attributes] to [assignment: the authorised
	identified roles].
	[assignment: access control SFP(s), information flow control SFP(s)]
	• None
	[selection: change_default, query, modify, delete, [assignment: other operations]]
	<ul> <li>[assignment: other operations]</li> </ul>
	[assignment: other operations]
	<ul> <li>Any Operations</li> </ul>
	[assignment: list of security attributes]
	Executable Attributes
	[assignment: the authorised identified roles]
	Nobody
	FMT_MSA.3 (b) Static attribute initialisation
	Hierarchical to: No other components.
	Dependencies: FMT MSA.1 Management of security attributes

FMT\_SMR.1 Security roles

FMT\_MSA.3.1 (b) The TSF shall enforce the TOE Function Access Control Policy, [assignment: access

*control SFP, information flow control SFP*] to provide [selection, choose one of: *restrictive, permissive, [assignment: other property]*] default values for security attributes that are used to enforce the SFP.

[assignment: access control SFP, information flow control SFP]

None

[selection, choose one of: restrictive, permissive, [assignment: other property]]

• permissive

FMT\_MSA.3.2 (b) The TSF shall allow the [assignment: the authorized identified roles] to specify alternative initial values to override the default values when an object or information is created.

[assignment: the authorized identified roles]

Nobody

FMT_MTD.1 (	a) Management of TSF data
	No other components. FMT_SMR.1 Security roles. FMT_SMF.1 Specification of Management Functions

FMT\_MTD.1.1 (a) The TSF shall restrict the ability to [selection: change\_default, query, modify, delete, clear, [assignment: other operations]] the [assignment: list of TSF data] to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, [assignment: the authorized identified roles except U.NORMAL]]].

[selection: change\_default, query, modify, delete, clear, [assignment: other operations]]

• Operation as listed in Table 6-9

[assignment: list of TSF data]

• TSF data as listed in Table 6-9

[selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, [assignment: the authorized identified roles except U.NORMAL]]]

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

• Roles as listed in Table 6-9

TSF data	Roles	Operation
Login User Name	U.ADMINISTRATOR	modify, delete, create
Login User Password	U.ADMINISTRATOR	modify, delete, create
User Authorization	U.ADMINISTRATOR	modify, delete, create
Job Authorization Settings	U.ADMINISTRATOR	modify, delete, create
Number of Retries until locked	U.ADMINISTRATOR	modify
(User Account Lockout Policy Settings)		
Lockout Duration	U.ADMINISTRATOR	modify
(User Account Lockout Policy Settings)		
Lockout List	U.ADMINISTRATOR	modify
Auto Logout Time Setting	U.ADMINISTRATOR	modify
Password Policy Settings	U.ADMINISTRATOR	modify
Date and Time Settings	U.ADMINISTRATOR	modify
Network Encryption Setting	U.ADMINISTRATOR	modify
FAX Forward Setting	U.ADMINISTRATOR	modify
Send Destination Information for	U.ADMINISTRATOR	modify
Forwarding Audit Log Report		
	Nobody	[assignment: other
Encryption Key		operations]
		•Any Operations

#### Table 6-9Operation of TSF data

# FMT\_MTD.1 (b) Management of TSF data

Hierarchical to: No other components.Dependencies: FMT\_SMR.1 Security roles.FMT\_SMF.1 Specification of Management Functions

FMT\_MTD.1.1 (b) The TSF shall restrict the ability to [selection: change\_default, query, modify, delete, clear, [assignment: other operations]] the [assignment: list of TSF data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL] to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, the

#### © 2021 KYOCERA Document Solutions Inc.

#### U.NORMAL to whom such TSF data is associated]].

[selection: change\_default, query, modify, delete, clear, [assignment: other operations]]

• Operation as listed in Table 6-10

[assignment: *list of TSF data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL*]

• TSF data as listed in Table 6-10

[selection, choose one of: *Nobody*, [selection: *U.ADMINISTRATOR, the U.NORMAL to whom such TSF data is associated*]]

• Role as listed in Table 6-10

#### Table 6-10Operation of TSF data

TSF data	Roles	Operation
Login User Password associated	U.NORMAL	modify
with U.NORMAL		

#### FMT\_SMF.1 Specification of Management Functions

Hierarchical to: No other components.Dependencies: No dependencies.

**FMT\_SMF.1.1** The TSF shall be capable of performing the following management functions: [assignment: *list of management functions to be provided by the TSF*].

[assignment: list of management functions to be provided by the TSF]

- Functions that manage security attributes (i.e. Box Owner, Box Permission and Owner Information) related to a Box function.
- Functions that manage TSF Data (i.e. Login User Name, Login User Password, User Authorization, Job Authorization Settings, Number of Retries until Locked, Lockout Duration, Auto Logout Time Setting, Password Policy Settings, Date and Time Settings, Network encryption Setting, Fax Forward Setting, Send Destination Information for forwarding Audit Log Report)

Relevant SFR	Management Functions	Management Items (defined by CC or PP)
FAU_GEN.1	-	There are no management activities
_		foreseen.
FAU_GEN.2	-	There are no management activities
		foreseen.
FAU_SAR.1	U.ADMINISTRATOR	a) maintenance (deletion, modification,
	Management of	addition) of the group of users with
	Authorization	read access right to the audit records.
FAU_SAR.2	-	There are no management activities
		foreseen.
FAU_STG.1	-	There are no management activities
		foreseen.
FAU_STG.4	None	a) maintenance (deletion, modification,
	(Action is fixed and	addition) of actions to be taken in case
	is not managed.)	of audit storage failure.
FCS_CKM.1(a)	-	There are no management activities
		foreseen.
FCS_CKM.1(b)	-	There are no management activities
		foreseen.
FCS_CKM.1(c)	-	There are no management activities
		foreseen.
FCS_COP.1(a)	-	There are no management activities
		foreseen.
FCS_COP.1(b)	-	There are no management activities
		foreseen.
FCS_COP.1(c)	-	There are no management activities
		foreseen.
FDP_ACC.1(a)	-	There are no management activities
		foreseen.
FDP_ACF.1(a)	None	a) Managing the attributes used to make
	(The role group	explicit access or denial based
	is fixed as U.	decisions.
	ADMINISTRATOR	
	and is not managed.)	
FDP_ACC.1(b)	-	There are no management activities
		foreseen.

FDP_ACF.1(b)	None	a)	Managing the attributes used to
	(The role group is		make explicit access or denial based
	fixed as		decisions.
	U.ADMINISTRATOR		
	and is not managed.)		
FDP_RIP.1	None	a)	The choice of when to perform
	(When only		residual information protection (i.e.
	deallocating the		upon allocation or deallocation) could
	resource, residual		be made configurable within the TOE.
	information		
	protection is		
	enforced.		
	Therefore, the timing		
	of residual		
	information		
	protection is not		
	managed.		
FIA_AFL.1	Management of	a)	management of the threshold for
	unsuccessful		unsuccessful authentication attempts;
	authentication	b)	management of actions to be taken in
	attempts.		the event of an authentication failure.
FIA_ATD.1	None	a)	if so indicated in the assignment, the
	(There are no		authorised administrator might be
	additional security		able to define additional security
	attributes and there		attributes for users.
	are no additional		
	security attributes to		
	be managed.)		
FIA_SOS.1	Management of Login	a)	the management of the metric used to
	User Password Policy		verify the secrets.
FIA_UAU.1	Management of login	a)	management of the authentication
	user password by		data by an administrator;
	U.ADMINISTRATOR.	b)	management of the authentication
	Management of		data by the associated user;
	U.NORMAL (him/her)	c)	managing the list of actions that can
	login user password		be taken before the user is
	by U.NORMAL.		authenticated.
FIA_UAU.7	-	Th	ere are no management activities

		foreseen.
FIA_UID.1	Management of the	Defined by PP:
	user identities	Management of the user identities
FIA_USB.1	None (Subject security attributes are fixed and are not managed.	<ul> <li>a) an authorised administrator can define default subject security attributes.</li> <li>b) an authorised administrator can change subject security attributes.</li> </ul>
FMT_MSA.1(a)	None (The role group is fixed as U.ADMINISTRATOR and is not managed.)	<ul> <li>a) managing the group of roles that can interact with the security attributes;</li> <li>b) management of rules by which security attributes inherit specified values.</li> </ul>
FMT_MSA.3(a)	None (The role group is fixed as U.ADMINISTRATOR and is not managed.)	<ul> <li>a) managing the group of roles that can specify initial values;</li> <li>b) managing the permissive or restrictive setting of default values for a given access control SFP;</li> <li>c) management of rules by which security attributes inherit specified values.</li> </ul>
FMT_MSA.1(b)	None (The role group is fixed as U.ADMINISTRATOR and is not managed.)	<ul> <li>a) managing the group of roles that can interact with the security attributes;</li> <li>b) management of rules by which security attributes inherit specified values.</li> </ul>
FMT_MSA.3(b)	None (The role group is fixed as U.ADMINISTRATOR and is not managed.)	<ul> <li>a) managing the group of roles that can specify initial values;</li> <li>b) managing the permissive or restrictive setting of default values for a given access control SFP;</li> <li>c) management of rules by which security attributes inherit specified values.</li> </ul>
FMT_MTD.1(a)	None (The role group is fixed as U.ADMINISTRATOR and is not managed.)	a) managing the group of roles that can interact with the TSF data.

	Nees	
FMT_MTD.1(b)	None	a) managing the group of roles that can
	(The role group is	interact with the TSF data.
	fixed as	
	U.ADMINISTRATOR	
	and is not managed.)	
FMT_SMF.1	-	There are no management activities
		foreseen.
FMT_SMR.1	Manage the group of	a) managing the group of users that are
	users that are user	part of a role.
	authorization.	
FPT_STM.1	Management of	Defined by PP:
	system time	Management of system time
FPT_TST.1	None	a) management of the conditions under
	(Self test executable	which TSF self testing occurs, such as
	condition is fixed and	during initial start-up, regular interval,
	is not managed.)	or under specified conditions;
		b) management of the time interval if
		appropriate.
FPT_FDI_EXP.1	Management of FAX	a) definition of the role(s) that are
	forward condition.	allowed to perform the management
		activities;
		b) management of the conditions under
		which direct forwarding can be
		allowed by an administrative role;
		c) revocation of such an allowance.
FTA_SSL.3	Management of	a) specification of the time of user
_	auto-logout time.	inactivity after which termination of
		, the interactive session occurs for an
		individual user;
		b) specification of the default time of
		user inactivity after which termination
		of the interactive session occurs.
FTP ITC.1	Management of	a) Configuring the actions that require
	Network Encryption	trusted channel, if supported.
	Setting.	

#### FMT\_SMR.1 Security roles

Hierarchical to:No other components.Dependencies:FIA\_UID.1 Timing of identification

**FMT\_SMR.1.1** The TSF shall maintain the roles **U.ADMINISTRATOR**, **U.NORMAL**, [selection: *Nobody*, [assignment: *the authorised identified roles*]].

[selection: Nobody, [assignment: the authorised identified roles]]

- Nobody
- **FMT\_SMR.1.2** The TSF shall be able to associate users with roles, **except for the role "Nobody" to** which no user shall be associated.

6.1.6. Class FPT: TSF Protection

	FPT_STM.1	Reliable time stamps
		No other components. No dependencies.
FPT_STM.1.1	The TSF shall be	able to provide reliable time stamps.

#### FPT\_TST.1 TSF testing

Hierarchical to:No other components.Dependencies:No dependencies.

FPT\_TST.1.1The TSF shall run a suite of self tests [selection: during initial start-up, periodically<br/>during normal operation, at the request of the authorised user, at the conditions<br/>[assignment: conditions under which self test should occur]] to demonstrate the<br/>correct operation of [selection: [assignment: parts of TSF], the TSF].

[selection: during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self test should occur]]

#### © 2021 KYOCERA Document Solutions Inc.

• during initial start-up

[selection: [assignment: parts of TSF], the TSF]

• [assignment: *parts of TSF*]

[assignment: parts of TSF]

- HDD Encryption Function
- **FPT\_TST.1.2** The TSF shall provide authorised users with the capability to verify the integrity of [selection: [assignment: *parts of TSF data*], *TSF data*].

[selection: [assignment: parts of TSF data], TSF data]

• [assignment: *parts of TSF data*]

[assignment: parts of TSF data]

- Encryption Key
- **FPT\_TST.1.3** The TSF shall provide authorised users with the capability to verify the integrity of [selection: [assignment: *parts of TSF*], *TSF*].

[selection: [assignment: parts of TSF], TSF]

• [assignment: *parts of TSF*]

[assignment: parts of TSF]

• TSF executable module

	FPT_FDI_EXP.	1 Restricted forwarding of data to external interfaces
		No other components. FMT_SMF.1 Specification of Management Functions FMT_SMR.1 Security roles.
FPT_FDI_EXP.1.1	The TSF shall pro	ovide the capability to restrict data received on any external Interface

FPT\_FDI\_EXP.1.1 The TSF shall provide the capability to restrict data received on any external Interface from being forwarded without further processing by the TSF to any Shared-medium Interface.

#### 6.1.7. Class FTA: TOE Access

	FTA_SSL.3 TSF-initiated termination
	Hierarchical to:No other components.Dependencies:No dependencies.
FTA_SSL.3.1	The TSF shall terminate an interactive session after a [assignment: <i>time interval of user inactivity</i> ].
	[assignment: time interval of user inactivity]
	• Operation Panel : No operation after time set by a device administrator
	elapsed (between 5 seconds and 495 seconds)
	• Web browser : No operation after 10 minutes elapsed.
and a v	*There are no interactive session exists with the exception of an operation panel veb browser.

#### 6.1.8. Class FTP: High Trusted Path/Channel

FTP_ITC.1	Inter-TSF trusted channel
-----------	---------------------------

Hierarchical to: No other components.Dependencies: No dependencies.

- **FTP\_ITC.1.1** The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the communicated data from modification or disclosure.
- **FTP\_ITC.1.2** The TSF shall permit **the TSF, another trusted IT product** to initiate communication via the trusted channel.

FTP\_ITC.1.3The TSF shall initiate communication via the trusted channel for communication of<br/>D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface.

#### 6.2. TOE Security Assurance Requirement

Security assurance requirements are described in **Table 6-12 2600.2 Security Assurance Requirements**. The evaluation assurance level of this TOE is EAL2. The security assurance component, ALC\_FLR.2 is added to the assurance components as shown in the Table 6-12.

Assurance Class	Assurance Components			
ADV: Development	ADV_ARC.1 Security architecture description			
	ADV_FSP.2 Functional specification with complete summary			
	ADV_TDS.1 Architectural design			
AGD: Guidance documents	AGD_OPE.1 Operational user guidance			
	AGD_PRE.1 Preparative procedures			
ALC: Life-cycle support	ALC_CMC.2 Authorisation controls			
	ALC_CMS.2 Implementation representation CM coverage			
	ALC_DEL.1 Delivery procedures			
	ALC_FLR.2 Flaw reporting procedures (augmentation of EAL2)			
ASE: Security Target evaluation	ASE_CCL.1 Conformance claims			
	ASE_ECD.1 Extended components definition			
	ASE_INT.1 ST introduction			
	ASE_OBJ.2 Security objectives			
	ASE_REQ.2 Derived security requirements			
	ASE_SPD.1 Security problem definition			
	ASE_TSS.1 TOE summary specification			
ATE: Tests	ATE_COV.1 Analysis of coverage			
	ATE_FUN.1 Functional testing			
	ATE_IND.2 Independent testing - sample			
AVA: Vulnerability assessment	AVA_VAN.2 Vulnerability analysis			

Table 6-12	2600.2 Security Assurance Requirements
------------	--

#### 6.3. Security Requirements Rationale

6.3.1. Security Functional Requirements Rationale

Table 6-13 shows the TOE security functional requirements and the corresponding security objectives.

Bold typeface items provide principal (P) fulfillment of the security objectives, and normal

typeface items provide supporting (S) fulfillment.

	Objectives												
SFRs	O.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	<b>O.INTERFACE.MANAGED</b>	<b>O.SOFTWARE.VERIFIED</b>	O.AUDIT.LOGGED	O.AUDIT_STORAGE.PROTE	O.AUDIT_ACCESS.AUTHORI	<b>O.HDD.ENCRYPTION</b>
FAU_GEN.1										Ρ			
FAU_GEN.2										Ρ			
FAU_SAR.1					Ρ							Ρ	
FAU_SAR.2					Ρ							Ρ	
FAU_STG.1						Ρ					Ρ		
FAU_STG.4						Ρ					Ρ		
FCS_CKM.1(a)													Р
FCS_CKM.1(b)	S	S	S	S	S	S							
FCS_CKM.1(c)	S	S	S	S	S	S							
FCS_COP.1(a)													Р
FCS_COP.1(b)	S	S	S	S	S	S							
FCS_COP.1(c)	S	S	S	S	S	S							
FDP_ACC.1(a)	Ρ	Ρ	Ρ										
FDP_ACF.1(a)	S	S	S										
FDP_ACC.1(b)							Ρ						
FDP_ACF.1(b)							S						
FDP_RIP.1	Р												
FIA_AFL.1							S	S					
FIA_ATD.1							S						

Table 6-13 Completeness of Security Requirements

© 2021 KYOCERA Document Solutions Inc.

	Objectives												
SFRs	o.doc.no_dis	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	<b>O.INTERFACE.MANAGED</b>	<b>O.SOFTWARE.VERIFIED</b>	O.AUDIT.LOGGED	O.AUDIT_STORAGE.PROTE	O.AUDIT_ACCESS.AUTHORI	O.HDD.ENCRYPTION
FIA_SOS.1							S	S					
FIA_UAU.1							Ρ	Ρ					
FIA_UAU.7							S	S					
FIA_UID.1	S	S	S	S	S	S	Ρ	Ρ		S			
FIA_USB.1							Ρ						
FMT_MSA.1(a)	S	S	S	Ρ									
FMT_MSA.3(a)	S	S	S										
FMT_MSA.1(b)				Ρ			S						
FMT_MSA.3(b)							S						
FMT_MTD.1(a)				Ρ	Ρ	Р							
FMT_MTD.1(b)					Р	Р							
FMT_SMF.1	S	S	S	S	S	S							
FMT_SMR.1	S	S	S	S	S	S	S						
FPT_STM.1										S			
FPT_TST.1									Ρ				
FPT_FDI_EXP.1								Ρ					
FTA_SSL.3							Ρ	Ρ					
FTP_ITC.1	Ρ	Ρ	Ρ	Ρ	Ρ	Ρ							

The rationale for "Table 6-13 Completeness of Security Requirements" demonstrates below.

#### O.DOC.NO\_DIS

O.DOC.NO\_DIS is the security objective to protect D.DOC from unauthorized disclosure.

FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(b), and FCS\_COP.1(c) support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.

FIA\_UID.1 identifies users. FDP\_ACC.1 (a) and FDP\_ACF.1 (a) allow the authorized users only to operate D.DOC.

Regarding D.DOC as residual data, any previous information cannot be used by FDP\_RIP.1.

FMT\_MSA.1 (a) manages operations on the security attributes.

FMT\_MSA.3 (a) surely sets owner information of D.DOC, an owner of a box storing D.DOC, or appropriate default value for a box permission, when D.DOC is generated.

FMT\_SMR.1 assigns and maintains user authorization of U.ADMINISTRATOR and U.NORMAL.

FMT\_SMF.1 provides U.NORMAL who are owners of U.ADMINISTRATOR and D.DOC with the security management functions.

By FTP\_ITC.1, D.DOC in transit over the network between the TOE and other trusted IT products are protected from alteration and disclosure.

Therefore, O.DOC.NO\_DIS ensures the protection of D.DOC from unauthorized disclosure.

# O.DOC.NO\_ALT

O.DOC.NO\_ALT is the security objective to protect D.DOC from unauthorized alteration.

FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(b), and FCS\_COP.1(c) support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.

FIA\_UID.1 identifies users. FDP\_ACC.1 (a) and FDP\_ACF.1 (a) allow the authorized users only to perform operations on D.DOC.

FMT\_MSA.1 (a) manages operations on the security attributes.

FMT\_MSA.3 (a) surely sets owner information of D.DOC, an owner of a box storing D.DOC, or appropriate default value for a box permission, when D.DOC is generated.

FMT\_SMR.1 assigns and maintains user authorization of U.ADMINISTRATOR and U.NORMAL.

FMT\_SMF.1 provides U.NORMAL who are owners of U.ADMINISTRATOR and D.DOC with the security management functions.

By FTP\_ITC.1, D.DOC in transit over the network between the TOE and other trusted IT products are protected from alteration and disclosure.

Therefore, O.DOC.NO\_ALT ensures the protection of D.DOC from unauthorized alteration.

# O.FUNC.NO\_ALT

O.FUNC.NO\_ALT is the security objective to protect D.FUNC from unauthorized alteration.

FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(b), and FCS\_COP.1(c) support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.

FIA\_UID.1 identifies users. FDP\_ACC.1 (a) and FDP\_ACF.1 (a) allow the authorized users only to operate D.FUNC.

FMT\_MSA.1 (a) manages operations on the security attributes.

FMT\_MSA.3 (a) ensures that owner information of D.FUNC have appropriate default value, when D.FUNC is generated.

FMT\_SMR.1 assigns and maintains user authorization of U.ADMINISTRATOR and U.NORMAL.

FMT\_SMF.1 provides U.NORMAL who are owners of U.ADMINISTRATOR and D.FUNC with the

security management functions.

D.FUNC in transit over the network between the TOE and other trusted IT products are protected from alteration and disclosure by FTP\_ITC.1.

Therefore, O.FUNC.NO\_ALT ensures the protection of D.FUNC from unauthorized alteration.

#### O.PROT.NO\_ALT

O.PROT.NO\_ALT is the security objective to protect D.PROT from unauthorized alteration.

FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(b), and FCS\_COP.1(c) support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.

FIA\_UID.1 identifies users and allows the authorized users only to operate D.PROT.

FMT\_MTD.1(a), FMT\_MSA.1(a) and FMT\_MSA.1(b) restricts U.ADMINISTRATOR to perform operations of the TSF data.

FMT\_SMR.1 assigns and maintains user authorization of U.ADMINISTRATOR and U.NORMAL.

FMT\_SMF.1 provides U.NORMAL who are owners of U.ADMINISTRATOR and D.FUNC with the security management functions.

By FTP\_ITC.1, D.PROT in transit over the network between the TOE and other trusted IT products are protected from alteration and disclosure by FTP\_ITC.1.

Therefore, O.PROT.NO\_ALT ensures the protection of D.PROT from unauthorized alteration.

#### O.CONF.NO\_DIS and O.CONF.NO\_ALT

O.CONF.NO.DIS and O.CONF.NO\_ALT are the security objectives to protect D.CONF from unauthorized disclosure and alteration.

FCS\_CKM.1(b), FCS\_CKM.1(c), FCS\_COP.1(b), and FCS\_COP.1(c) support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.

FAU\_SAR.1 and FAU\_SAR.2 restricts performing read operation of the TSF Data(Audit logs) to U.ADMINISTRATOR.

FAU\_STG.1 protects TSF Data(Audit logs) from unauthorized deletion and alteration.

FAU\_STG.4 protects TSF Data(Audit logs) from possible loss if the audit log is full.

FIA\_UID.1 identifies users and allows the authorized users only to operate D.PROT.

FMT\_MTD.1 (a) restricts U.ADMINISTRATOR and Nobody to operate the TSF data.

FMT\_MTD.1 (b) restricts U.NORMAL who are owners of D.CONF to operate the TSF data.

FMT\_SMR.1 maintains user authorization of U.ADMINISTRATOR, U.NORMAL and Nobody, and assigns user authorization of U.ADMINISTRATOR and U.NORMAL to the users.

FMT\_SMF.1 provides U.NORMAL who are owners of U.ADMINISTRATOR and D.CONF with the security management functions.

FTP\_ITC.1 protects D.CONF in transit over the network between the TOE and other trusted IT product from modification and disclosure.

Therefore, O.CONF.NO.DIS and O.CONF.NO\_ALT ensure protection of D.CONF from

unauthorized disclosure and alteration.

# O.USER.AUTHORIZED

O.USER.AUTHORIZED is the security objective to ensure that the TOE requires identification and authentication of users, and access privilege is given to users before the users are allowed to use the TOE.

FIA\_UID.1 and FIA\_UAU.1 implement identification and authentication of users.

FIA\_UAU.7 protects authentication feedback to users.

FIA\_AFL.1 lockouts user login when users consecutively fail their authentication.

FIA\_ATD.1 maintains user attributes of login user name, user authorization and job authorization setting.

FIA\_SOS.1 verifies if the secret of user authentication meet the defined quality metrics.

FIA\_USB.1 binds user attributes of login user name, user authorization and job authorization setting to the subject security attributes.

FTA\_SSL.3 manages user session and terminates out of session.

FDP\_ACC.1 (b) and FDP\_ACF (b) allow authorized users only to operate basic functions.

FMT\_MSA.1 (b) manages operation on the security attributes.

FMT\_MSA.3 (b) ensures that executable attributes that are the security attributes have appropriate default values.

FMT\_SMR.1 maintains that user authorization of U.ADMINISTRATION and U.NORMAL are assigned to the users.

Therefore, O.USER.AUTHORIZED ensures that the TOE requires identification and authentication of users, and access privilege is given to users before users are allowed to user the TOE.

#### O.INTERFACE.MANAGED

O.INTERFACE.MANAGED is the security objective to ensure that the TOE manages the operation of external interfaces according to the security policies.

FIA\_UID.1 and FIA\_UAU.1 implement identification and authentication of users.

FIA\_UAU.7 protects authentication feedback to users.

FIA\_AFL.1 lockouts user login when users consecutively fail their authentication.

FIA\_SOS.1 verifies if the secrete of user authentication meet the defined quality metrics.

FTA\_SSL3 manages user session and terminates out of session.

FPT\_FDI\_EXP.1 protects forwarding of data to internal network.

Therefore, O.INTERFACE.MANAGED can manage the operation of external interfaces.

# O.SOFTWARE.VERIFIED

O.SOFTWARE.VERIFIED is the security objective to provide self-verification of the TSF executable code.

FPT\_TST.1 runs a suite of self-test during the TOE start-up, and verifies the integrity of parts of

TSF data and verifies the integrity of parts of TSF by operating at arbitrary timing after the start-up.

Therefore, O.SOFTWARE.VERIFIED can provide authorized users with the procedure for self-verification of the TSF executable code.

# O.AUDIT.LOGGED

O.AUDIT.LOGGED is the security objective to record and manage usage of the TOE and the security events, and prevent unauthorized disclosure and alteration.

FAU\_GEN.1 records the audit log of the events, which should be auditable.

By associating FAU\_GEN.2 with FIA\_UID.1, the auditable events are associated with identification information of users.

FPT\_STM.1 provides a trusted time stamp function inside the TOE, and records the times when auditable events occurred.

Therefore, O.AUDIT.LOGGED records and manages usage of the TOE and the security auditable events, and ensures the prevention of unauthorized disclosure and alteration.

# O.AUDIT\_STORAGE.PROTECTED

O.AUDIT\_STORAGE.PROTECTED is the security objective to protect the audit logs from unauthorized access, deletion and alteration.

FAU\_STG.1 protects the stored audit logs from unauthorized deletion and alteration.

FAU\_STG.4 overwrites the oldest stored audit logs, and stores new audit logs when the number of audit logs reach threshold.

Therefore, O.AUDIT\_STORAGE.PROTECTED ensures the protection of the audit logs from unauthorized access, deletion and alteration.

# O.AUDIT\_ACCESS.AUTHORIZED

O.AUDIT\_ACCESS.AUTHORIZED is the security objective to allow the authorized users only to access the audit log to detect potential security violation.

FAU\_SAR.1 provides U.ADMINISTRATOR with the capability to read information from the audit logs.

FAU\_SAR.2 restricts access to the audit logs, except U.ADMINISTRATOR.

Therefore, O.AUDIT\_ACCESS.AUTHORIZED ensures that authorized users only access the audit logs to detect potential security violation.

# O.HDD.ENCRYPTION

O.HDD.ENCRYPTION is the security objective to encrypt User Data and TSF Data stored in HDD inside the TOE.

FCS\_CKM.1(a) generates encryption keys in accordance with a specified encryption algorithm. FCS\_COP.1(a) encrypts D.DOC, D.FUNC, D.PROT and D.CONF when storing in the HDD using a specified encryption algorithm and encryption key length, and decrypts D.DOC, D.FUNC, D.PROT and D.CONF when reading out from the HDD.

Therefore, O.HDD.ENCRYPTION ensures the encryption of User Data and TSF Data when storing in HDD.

6.3.2. Dependency Relationship of the TOE Security Functional Requirements Table 6-14 shows the dependency relationship of the TOE security functional requirements.

Functional Requirements	Dependency Relationship	Dependencies Not Satisfied
FAU_GEN.1	FPT_STM.1	_
FAU_GEN.2	FAU_GEN.1 FIA_UID.1	_
FAU_SAR.1	FAU_GEN.1	_
FAU_SAR.2	FAU_SAR.1	_
FAU_STG.1	FAU_GEN.1	_
FAU_STG.4	FAU_STG.1	_
FCS_CKM.1(a)	FCS_COP.1(a) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1
FCS_CKM.1(b)	FCS_COP.1(b) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1
FCS_CKM.1(c)	FCS_COP.1(c) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1
FCS_COP.1(a)	FCS_CKM.1(a) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1
FCS_COP.1(b)	FCS_CKM.1(b) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1
FCS_COP.1(c)	FCS_CKM.1(c) FCS_CKM.4	FCS_CKM.4 See Section 6.3.2.1

#### Table 6-14 Dependency Relationship of the TOE Security Functional Requirements

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

FDP_ACC.1(a)	FDP_ACF.1(a)	
		—
FDP_ACF.1(a)	FDP_ACC.1(a)	
	FMT_MSA.3(a)	—
FDP_ACC.1(b)	FDP_ACF.1(b)	
FDP_ACF.1(b)	FDP_ACC.1(b)	_
	FMT_MSA.3(b)	
FDP_RIP.1	No dependencies.	_
FIA_AFL.1	FIA_UAU.1	_
	Ne dependencies	
FIA_ATD.1	No dependencies.	-
FIA_SOS.1	No dependencies.	
117_303.1	No dependencies.	—
FIA_UAU.1	FIA UID.1	
_	_	—
FIA_UAU.7	FIA_UAU.1	
		—
FIA_UID.1	No dependencies.	_
FIA_USB.1	FIA_ATD.1	_
FMT_MSA.1(a)	FDP_ACC.1(a)	_
	FMT_SMF.1	
ENAT NACA 2(a)	FMT_SMR.1	
FMT_MSA.3(a)	FMT_MSA.1(a) FMT_SMR.1	-
FMT_MSA.1(b)	FDP_ACC.1(b)	
	FMT_SMF.1	—
	FMT_SMR.1	
FMT_MSA.3(b)	FMT_MSA.1(b)	
	FMT_SMR.1	-
FMT_MTD.1(a)	FMT_SMF.1	
	FMT_SMR.1	—
FMT_MTD.1(b)	FMT_SMF.1	
	FMT_SMR.1	-

FMT_SMF.1	No dependencies.	_
FMT_SMR.1	FIA_UID.1	_
FPT_STM.1	No dependencies.	_
FPT_TST.1	No dependencies.	_
FPT_FDI_EXP.1	FMT_SMF.1 FMT_SMR.1	_
FTA_SSL.3	No dependencies.	_
FTP_ITC.1	No dependencies.	_

#### 6.3.2.1. Rationale for why dependency on FCS\_CKM.4 is not needed.

The encryption key to encrypt HDD is generated with a unique value only per device every time main power is turned on, and is stored in the volatile memory. However, the TOE is physically protected by security objectives in operational environment, that is OE.PHYSICAL.MANAGED, even when the main power is turn off. Therefore the requirement for the encryption key destruction is not needed. The symmetric session key generated during the handshake by the client, used to encrypt application data exchanged in the TLS session, is not persistently stored by either the client or the server. This session key is held in memory and is only valid for that given session. Once the session is terminated the key cannot be used to decrypt subsequent sessions. The attack potential required attempting to extract the key from the client memory following session termination to decrypt traffic captured between the client and server is significantly beyond the attack potential of EAL2. Therefore the requirement for the encryption key destruction is not needed.

The pre-shared key authentication method is used for the authentication of the IP-Sec peer. The pre-shared key is set by Device Administrator and not generated and destructed by the device. The symmetric encryption communication key obtained by DH IKEv1 Key Derivation Function is not persistently stored by each peers. This key is held in memory and is only valid with the corresponding Security Association. Once the SA is terminated the key cannot be used. Therefore the requirement for the encryption key destruction is not needed.

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

#### 6.3.3. Security Assurance Requirements Rationale

This TOE is Hardcopy Devices used in commercial information processing environments that require a moderate level of document security, network security, and security assurance. The TOE will be exposed to only a low level of risk because it is assumed that the TOE will be located in a restricted or monitored environment that provides almost constant protection from unauthorized and unmanaged access to the TOE and its data interfaces. Agents cannot physically access any nonvolatile storage without disassembling the TOE. Agents have limited or no means of infiltrating the TOE with code to effect a change and the TOE self-verifies its executable code to detect unintentional malfunctions. As such, the Evaluation Assurance Level 2 is appropriate.

EAL 2 is augmented with ALC\_FLR.2, Flaw reporting procedures. ALC\_FLR.2 ensures that instructions and procedures for the reporting and remediation of identified security flaws are in place, and their inclusion is expected by the consumers of this TOE.

# 7. TOE Summary Specification

This section describes the summary specification for the security functions that are provided by the TOE.

Table 7-1 shows the relations between the TOE security functions and security functional requirements

Security Functions Functional	TSF.USER_AUTHENTICATION	TSF.DATA_ACCESS	TSF.JOB_AUTHORIZED	TSF.HDD_ENCRYPTION	TSF.DOC_OVERWRITE	TSF.AUDIT_LOGGED	TSF.SECURITY_MANAGEMENT	TSF.SELF_TEST	TSF.NETWORK_PROTECTION
Requirements	Ĩ	Ĥ	Ĥ	μ	Ĕ	Ĥ	Ĥ	μ	Ĥ
FAU_GEN.1									
FAU_GEN.2						✓			
FAU_SAR.1						✓			
FAU_SAR.2						✓			
FAU_STG.1						✓			
FAU_STG.4						$\checkmark$			
FCS_CKM.1(a)				$\checkmark$					
FCS_CKM.1(b)									$\checkmark$
FCS_CKM.1(c)									$\checkmark$
FCS_COP.1(a)				$\checkmark$					
FCS_COP.1(b)									$\checkmark$
FCS_COP.1(c)									$\checkmark$
FDP_ACC.1(a)		✓							
FDP_ACF.1(a)		$\checkmark$							
FDP_ACC.1(b)			$\checkmark$						
FDP_ACF.1(b)			$\checkmark$						
FDP_RIP.1					✓				
FIA_AFL.1	$\checkmark$								
FIA_ATD.1	$\checkmark$								

 Table 7-1
 TOE security functions and security functional requirements

© 2021 KYOCERA Document Solutions Inc.

FIA_SOS.1	$\checkmark$							
FIA_UAU.1	$\checkmark$							
FIA_UAU.7	✓							
FIA_UID.1	✓							
FIA_USB.1	$\checkmark$							
FMT_MSA.1(a)						✓		
FMT_MSA.3(a)		$\checkmark$						
FMT_MSA.1(b)						✓		
FMT_MSA.3(b)			$\checkmark$					
FMT_MTD.1(a)						✓		
FMT_MTD.1(b)						✓		
FMT_SMF.1						✓		
FMT_SMR.1						✓		
FPT_STM.1					$\checkmark$			
FPT_TST.1							✓	
FPT_FDI_EXP.1								$\checkmark$
FTA_SSL.3	✓							
FTP_ITC.1								$\checkmark$

# 7.1. User Management Function

# TSF.USER\_AUTHENTICATION

User management function is a function that identifies and authenticates whether persons are authorized users when users intend to operate the TOE from the operation panel or the client PCs.

When the TOE is used from the Operation Panel or a Web browser, the login screen is displayed and a user is required to enter his or her login user name and login password.

When the TOE is accessed from the printer driver or TWAIN driver, the TOE identifies and authenticates if the person is authorized by referring to the login user name and login user password obtained from a user job.

(1) FIA\_UID.1 Timing of identification

When a user intends to login to the TOE, the TOE verifies if the entered login user name exists in the user information pre-registered in the TOE.

With reception of the device status, the TOE provides information before the user is identified. With a list of user jobs and counter information, the TOE displays the information before the user is identified. With fax data reception, the TOE receives fax data before the user is identified.

(2) FIA\_UAU.1 Timing of authentication

When the user is successfully identified by FIA\_UID.1, the TOE verifies if the entered login user password matches with one pre-registered in the TOE.

With reception of the device status, the TOE provides information before the user is authenticated. With a list of user jobs and counter information, the TOE displays the information before the user is authenticated. With fax data reception, the TOE receives fax data, before the user is authenticated.

- (3) FIA\_UAU.7 Protected authentication feedback The TOE displays login user password entered from the operation panel or a client PC on the login screen, which is masked by dummy characters (\*: asterisk).
- (4) FIA\_ATD.1 User attribute definition The TOE defines and maintains user attributes such as login user name, user authorization and job authorization setting.
- (5) FIA\_SOS.1 Verification of secrets The TOE verifies that a login user password meets specified quality metrics such as password length: no fewer than the minimum number of characters (8 characters), character and types: Alphanumeric or special characters.
- (6) FIA\_USB.1 User-subject biding The TOE associates user attributes such as login user name, user authorization and job authorization setting with subjects.
- (7) FIA\_AFL.1 Authentication failure handling

When the number of consecutive unsuccessful login attempts from the operation panel or a client PC since the last successful authentication, reaches the threshold, the TOE does not allow the users to access to the accounts (i.e. state changes to lockout condition). The number of unsuccessful authentication attempts set by the dovice administrator can

The number of unsuccessful authentication attempts set by the device administrator can be within 1 to 10 times.

After changing to lockout state, If time between 1 and 60 minutes and until the lockout time designated by a device administrator that elapse, or until a device administrator releases lockout state, the TOE is then back to the normal state.

(8) FTA\_SSL.3 TSF-initiated termination

The auto-logout is activated if no operation is performed from the operation panel or a web browser for certain period of time.

X here are no interactive session exists with the exception of an operation panel and a web browser.

<sup>© 2021</sup> KYOCERA Document Solutions Inc.

Operation Panel

After the user logs on to the TOE and if no operation is performed while the auto-logout time set by the device administrator elapses, the auto-logout is activated. The time can be set to 5 to 495 seconds by the device administrator.

# Web browser After the user logs on to the TOE and if no operation is performed for 10 minutes, the auto-logout is activated.

# 7.2. Data Access Control Function

# TSF.DATA\_ACCESS

The data access control function is a function that allows authorized users only to access to image data and job data stored in the TOE using each of the TOE basic function such as copy, scan to send, print, fax and box function.

(1) FDP\_ACC.1(a) Subset access control

FDP\_ACF.1(a) Security attribute based access control

The TOE allows authorized users only to access to image data and job data handled by respective basic functions in accordance with the access control rules for users as shown in Table 7-2.

In Table 7-2 Access Control Rules, login user names and owner information of targeted assets need to be matched in order to determine if the jobs are executed by themselves.

Targeted Assets	Operations	Users	Access Control Rules
Image Data	Box Print (Job after print	Normal User	It is allowed for a normal user to
(Print Function)	request from a printer		access to job image data executed
	driver), Print from a USB		by themselves.
	memory, Delete		
	Delete	Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.
Image Data	FTP Send, E-mail Send,	Normal User	It is allowed for a normal user to
(Scan to Send	TWAIN Send, Preview		access to job image data executed
Function)	send image, Delete		by themselves.
	Delete	Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.
Image Data	Copy Print, Copy preview	Normal User	It is allowed for a normal user to
(Copy Function)	image, Delete		access to job image data executed
			by themselves.
	Delete	Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.
Image Data	FAX Send, Send preview	Normal User	It is allowed for a normal user to
(Fax Send Function)	image, Delete		access to job image data executed
			by themselves.
	Delete	Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.
Image Data	Box print,	Normal User	It is allowed for a normal user to
(Box Function)	Box preview,		access to image data stored in their
	Box Send,		own box set as an owner or a box
	Move, Join and Delete		permission to be enabled.
	documents inside a box	Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.
Image Data	Print FAX reception, FAX	Device	It is allowed for a device
(Fax Reception	forward, Delete	Administrator	administrator to access to image
Function)			data stored in FAX box.

Table 7-2 A	ccess Control Rules for Data Access Control Functions
-------------	---

Job Data	Job status confirmation, Edit, Delete	Normal User	It is allowed for a normal user to access to job image data executed by themselves.
		Device	It is allowed for a device
		Administrator	administrator to access to all job
			image data.

# (2) FMT\_MSA.3(a) Static attribute initialization

The TOE sets default values for image data that is initially generated, and a box. Owner information is created using a login user name of the user who initially creates the image data. Box owner is a device administrator who initially creates the box, and the box permission is disabled.

# 7.3. Job Authorization Function

#### TSF.JOB\_AUTHORIZED

The job authorization function is a function that allows authorized users only to use the TOE basic function such as copy, scan to send, print, fax and box function.

# (1) FDP\_ACC.1(b) Subset access control

FDP\_ACF.1(b) Security attribute-based access control Table 7-3 shows that the TOE confirms job authorization setting included in user information of a user who is identified and authenticated by user management function, and allows the user to execute a job by using the authorized basic functions only.

Targeted	Users	Access Control Rules
Function		
Сору	Normal User	When executable attributes of targeted functions
Function	Device	are included in job authorization setting of a user,
	Administrator	TOE allows the user to execute a job.
Print	Normal User	When executable attributes of targeted functions
Function	Device	are included in job authorization setting of a user,
	Administrator	TOE allows the user to execute a job.
Scan to	Normal User	When executable attributes of targeted functions
Send	Device	are included in job authorization setting of a user,
Function	Administrator	TOE allows the user to execute a job.
FAX	Normal User	When executable attributes of targeted functions
Function	Device	are included in job authorization setting of a user,
	Administrator	TOE allows the user to execute a job.
Вох	Normal User	When executable attributes of targeted functions
Function	Device	are included in job authorization setting of a user,
	Administrator	TOE allows the user to execute a job.

Table 7-3	Access Control Rules for Job Authorization Function
-----------	---

#### (2) FMT\_MSA.3(b) Static attribute initialization

Table 7-3 shows that the TOE sets default values for job executable attributes that are targeted functions of job authorization setting on a per user basis. When a user is newly added, default values for executable attributes that are included in job authorization setting, have been set for all jobs.

# 7.4. HDD Encryption Function

# TSF.HDD\_ENCRYPTION

Once the basic function of the TOE is executed, image data, job data and TSF data is stored on the HDD. The HDD encryption function is a function that encrypts data and then stores the data on the HDD when storing these data on the HDD.

(1) FCS\_CKM.1(a) Cryptographic key generation (Storage Encryption)

The TOE generates a 256 bits encryption key to be used in the AES algorithm by using the encryption key generation algorithm in accordance with NIST SP800-56C. This encryption key is generated from multiple information including the encryption code which users register and a unique value on a per device basis, every time each TOE is powered on, and this encryption key is stored in a volatile memory. The encryption code is set only at the

activation of Data Encryption/Overwrite function and is not changed during the operation.

(2) FCS\_COP.1(a) Cryptographic operation (Storage Encryption)

When storing data on the HDD, the TOE encrypts the data, using the 256 bits encryption key generated at the time of booting (FCS\_CKM.1(a)) and the AES encryption algorithm based on FIPS PUB 197, and write into the HDD. When reading out the stored data from the HDD, the TOE decrypts the data, similarly using the 256 bits encryption key generated at the time of booting and the AES encryption algorithm.

# 7.5. Overwrite-Erase Function

# TSF.DOC\_OVERWRITE

After process of the respective basic functions is complete, the TOE instructs to delete used image data on the HDD or flash memory. The overwrite-erase function is a function that overwrites the actual image data with meaningless character strings so that it disables re-usage of the data when receiving an instruction for deletion of the stored image data on the HDD.

# (1) FDP\_RIP.1 Subset residual information protection

The TOE stores the used image data to be overwritten and erased in the specific area on the HDD and flash memory, and then conducts to overwrite and erase by the process of auditing of the specific area. When receiving an instruction for operation of another basic function and so when waiting for the overwrite-erase function to be performed, or when the existence of the used image data is found because of turning off the power during overwrite-erase processing, the overwrite-erase is conducted by the audit process at the time of coming out of the waiting status or at the time of turning on the power.

# 7.6. Audit Log Function

# TSF.AUDIT\_LOGGED

The audit log function is a function that generates, records and manages audit logs when occurring auditable events.

# (1) FAU\_GEN.1 Audit data generation

The TOE records audit data as listed in Table 7-4, and generates audit logs when auditable events shown in Table 7-4 occur.

Auditable Events	Audit Data	Additional Audit Data
Power-on <sup>*1</sup>	Date and time of the	_
	event,	
Power-off <sup>*1</sup>	Type of event,	_
	Identification information	
Completion of a job	of the user (Including the	Identification
	identification information	information of the
	of the user who	event
Operation of job data	attempted to login),	Identification
(read, modify, delete)	The outcome of the event	information of the
	(success or failure)	event
Success and failure of the user identification		_
and authentication		
Execution of user lockout and release of		_
lockout status by a device administrator		
when the number of consecutive		
unsuccessful authentication attempts since		
the last successful authentication, reaches		
the threshold.		
Session termination by auto-logout		_
Operation of image data		Identification
(read, delete)		information of the
		event
Edit of user management information		
(Modify user authorization)		_
When registration of login user password is		
made, deny by quality check (create, edit)		
Use of security management function		_
Change of time		_
Communication failure of TLS or IPsec		Recipient's
communication		communication IP
		address

#### Table 7-4 Auditable Events and Audit Data

\*1 Start-up and shutdown of the audit functions synchronize power-on and power-off of the TOE, and thus power-on and power-off of the TOE of the event can be substituted.

- (2) FAU\_GEN.2 User identity association For each auditable event, the TOE associates the user identity information that is a cause, with the audit log.
- (3) FAU\_SAR.1 Audit review

FAU\_SAR.2 Restricted audit review The TOE provides device administrators only with the capability to read information from the audit records. Read-access to the audit records is sent (by email) to the email destination set by a device administrator.

(4) FAU\_STG.1 Protected audit trail storage

The TOE provides device administrators only with capability to read and delete information from the audit records, and does not provide normal users other than device administrators with a function to access to the audit records.

- (5) FAU\_STG.4 Prevention of audit data loss The TOE overwrites the oldest stored audit records and records new auditable events if the audit log files are full.
- (6) FPT\_STM.1 Reliable time stamps The TOE has a system clock inside itself. The TOE records a date and time of the event with the system clock when auditable events occur. The TOE provides a highly reliable time stamp by recording the time stamps on audit records without delay when the time is recorded by the system clock inside the TOE.
- 7.7. Security Management Function

# TSF.SECURITY\_MANAGEMENT

Security management function is a function that allows authorized users only to edit user information, set the TOE security functions and manage. The Security management function can be performed from the Operation Panel and Client PCs. Web browser is used for operation from Client PCs.

(1) FMT\_MSA.1(a) Management of security attributes

The TOE allows device administrators only to use box functions for all boxes as shown below.

- Read and modify a box owner
- Read and modify a box permission

Whereas, the TOE allows device administrators only to use box functions for documents as shown below.

• Read and modify document owner information

Normal users are allowed to perform the following operation on the self owner boxes.

- Read and modify a box permission
- (2) FMT\_MSA.1(b) Management of security attributes No roles of executable attributes as shown in Table 7-3 are available for the TOE.
- (3) FMT\_MTD.1(a) Management of TSF Data

The TOE provides device administrators only with the operation listed in Table 7-5 on TSF data listed in Table 7-5.

TSF Data	Authorized Operation
Register user information	Edit,
(Login user name, login user password, user	Delete,
authorization, job authorization settings)	Newly create
User account lockout policy settings	Modify
(number of retries until locked, lockout	
duration)	
Lockout list	Modify
Auto logout time setting	Modify
Password policy settings	Modify
Date and time settings	Modify
Network Encryption Setting	Modify
FAX forward setting	Modify
Send destination information for forwarding	Modify
audit log report	

#### Table 7-5 Operation of TSF Data by Device Administrators

(4) FMT\_MTD.1(b) Management of TSF Data

The TOE provides normal users with the operation listed in Table 7-6 on TSF data listed in Table 7-6.

TSF Data	Authorized Operation
Edit user information	Edit
(Login user password associated to the users)	

#### Table 7-6 Operation of TSF Data by Normal Users

#### (5) FMT\_SMR.1 Security roles

The TOE maintains the user authorizations of device administrators and normal users, and associates users to the user authorizations.

# (6) FMT\_SMF.1 Specification of management function

The TOE provides management function of security attributes for box functions as mentioned in (1), and security management function shown in Table 7-5 and Table 7-6 on TSF data shown in Table 7-5 and Table 7-6.

#### 7.8. Self-Test Function

#### TSF.SELF\_TEST

The self-test function is a function that performs the following self-test.

#### (1) FPT\_TST.1 TSF test

The TOE performs the following self-test.

- Check if HDD encryption function is correctly performed.
- Check the integrity of the encryption key
- Check the integrity of executable module of the security function

At the TOE start-up, the TOE simultaneously checks if HDD encryption function is correctly performed and the integrity of the encryption key is verified by confirming encryption and decryption operations using the encryption key. Also, the TOE checks the integrity of executable module of the security functions when receiving an instruction from a device administrator.

In case abnormal operation is found by check at the TOE start-up, the users are notified of this abnormal status by displaying it on the Operation Panel of the TOE. If no abnormal item is found on the Operation Panel, the users assume the TOE correctly operates and so the users can use the TOE.

# 7.9. Network Protection Function

# TSF.NETWORK\_PROTECT

The network protection function is a function that encrypts all data in transit over the network

between the TOE and trusted IT product and prevents unauthorized alteration and disclosure. This function also provides a feature to prevent forwarding of information from an external interface to an internal network through TOE without permission.

(1) FTP\_ITC.1 Trusted channel between TSF

When the TOE communicates with each type of server or a Client PC that are trusted IT products, communication starts between them via a trusted channel. This communication can start from either of the TOE or the trusted IT product. The following functions are provided.

- Scan to send function
- Print function
- Box function (Send Function)
- Operation of a box function from a client PC (web browser)
- Operation of security management function from a client PC (web browser) However, use of print function for a direct connection with the TOE is exception.

The TOE provides trusted channel communications listed below.

Table 7-7 Trusted channel communications provided by the TOE

Destination	Protocols	Encryption algorithm
Client PC	TLSv1.2, TLSv1.3	AES(128 bits, 256 bits), ChaCha20-Poly1305
Mail Server	IPsec with ESP	3DES(168 bits), AES(128 bits, 192 bits, 256 bits)
FTP Server	IPsec with ESP	3DES(168 bits), AES(128 bits, 192 bits, 256 bits)

(2) FCS\_CKM.1(b) Cryptographic key generation (TLS)

Secure Communications requires generation of a certificate with an RSA public-private key pair.

The TOE creates session keys following the TLS protocol specification and using the DRBG implemented in OpenSSL.

- (3) FCS\_CKM.1(c) Cryptographic key generation (IPSec)
   ISAKMP and IKEv1 are used to establish the Security Association (SA) and keys for the IPSec exchanges.
- (4) FCS\_COP.1(b) Cryptographic operation (TLS)

TLS 1.2 (RFC5246) is used to establish secure channel between client PCs and TOE. The TOE sends the server certificate chain to the client. The client performs certificate path validation of the server certificate during the TLS handshake. If the certificate cannot be

successfully validated (e.g. it has expired or has been revoked) the TLS session is not established.

The TOE only allows the establishment of a TLS secure channel using TLSv1.2 and TLSv1.3. The TOE denies any attempt by a TLS client to establish communication using the following versions of the SSL or TLS protocols: SSLv1.0, SSLv2.0, SSLv3.0, TLSv1.0 or TLSv1.1. The TOE creates session keys following the TLS protocol specification and using the DRBG implemented in OpenSSL. This session key is held in memory and is only valid for that given session. Once the session is terminated the key cannot be used to decrypt subsequent sessions. The TOE supports the following cipher suites:

TLS_AES_256_GCM_SHA384	(RFC8446)
<ul> <li>TLS_AES_128_GCM_SHA256</li> </ul>	(RFC8446)
<ul> <li>TLS_CHACHA20_POLY1305_SHA256</li> </ul>	(RFC8439)
TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	(RFC5289)
TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	(RFC5289)
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	(RFC5289)
• TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256	(RFC5289)
TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305	(RFC7905)
TLS_DHE_RSA_WITH_AES_256_GCM_SHA384	(RFC5288)
TLS_DHE_RSA_WITH_AES_128_GCM_SHA256	(RFC5288)
TLS_DHE_RSA_WITH_CHACHA20_POLY1305	(RFC7905)
TLS_RSA_WITH_AES_256_GCM_SHA384	(RFC5288)
TLS_RSA_WITH_AES_128_GCM_SHA256	(RFC5288)
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA	(RFC5246)
TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA	(RFC5246)
TLS_DHE_RSA_WITH_AES_256_CBC_SHA256	(RFC5246)
TLS_DHE_RSA_WITH_AES_256_CBC_SHA	(RFC5246)
TLS_DHE_RSA_WITH_AES_128_CBC_SHA256	(RFC5246)
TLS_DHE_RSA_WITH_AES_128_CBC_SHA	(RFC5246)
TLS_RSA_WITH_AES_256_CBC_SHA256	(RFC5246)
TLS_RSA_WITH_AES_128_CBC_SHA256	(RFC5246)
TLS_RSA_WITH_AES_256_CBC_SHA	(RFC5246)
TLS_RSA_WITH_AES_128_CBC_SHA	(RFC5246)

(5) FCS\_COP.1(c) Cryptographic operation (IPSec)

IPSec with ESP is required for network datagram exchanges with Mail Server/FTP Server. IPSec provide confidentiality, integrity and authentication of the endpoints. Supported encryption options for ESP are 3DES and AES. HMAC-SHA256-128, HMAC-SHA384-192, and HMAC-SHA512-256 are supported for Data authentication.

ISAKMP and IKEv1 are used to establish the Security Association (SA) and keys for the IPSec

exchanges. Diffie-Hellman is used for IKEv1 Key Derivation Function as specified in RFC2409, using Oakley Groups 14, 16, 17, 18, 19, 20, 21, 22, 23, or 24. In the ISAKMP exchange, a pre-shared keys is configured by administrators and validated between endpoints.

The key size specified in the SA exchange is 128, 192, or 256 bits and the encryption algorithm is 3DES or AES-CBC and the Hash Authentication Algorithm may be SHA-256, SHA-384, or SHA-512 (as configured by administrators).

Keys generated for the IKEv1 exchanges are performed per RFC2409. If an incoming IP datagram does not use IPSec with ESP, the datagram is discarded. All keys are held in memory and is only valid with the corresponding SA. Once the SA is terminated the key cannot be used.

(6) FPT\_FDI\_EXP.1 Restricted forwarding of data to external interfaces

The TOE does not have a structure that forwards information entered and data received from all external interfaces to a server or a client PC directly on an internal network, and controls not to be able to forward the information and data without permission.

Also, data received via a telephone line is limited to use fax function only. The TOE has a structure that receives data via fax communication protocol only. Thus forwarding of data to an internal network without permissions cannot be done.

# 7.10. Deviations From Allowed Cryptographic Standards

The following deviations from the Allowed Cryptographic Standards in 188 Scheme Crypto Policy are noted:

- 1. Hashing: SHA-1 is supported for backward compatibility with remote systems.
- 2. Block cipher: AES-XTS is supported for storage encryption.
- 3. Authenticated Encryption with Associated Data: ChaCha20-Poly1305 is supported for TLSv1.3 communication.

# 8. Acronyms and Terminology

# 8.1. Definition of terms

The definitions of the terms used in this ST are indicated in Table 8-1.

Terms	Definitions
FAX System 12	This is provided as an optional product of MFP to use fax
	function. FAX function can be used by installing FAX board
	separately on MFP.
HD-15	This is a HDD strage option that enhances the box function.
	The capacity of the box function and the number of box will be
	increased.
TWAIN	This function is to read image from scanner and send the image
	to a client PC. The term, "TWAIN" indicates the API
	specification.
FAX Data Reception	It indicates an action that includes reception of incoming FAX
	data to TOE. (the process such as printing and forwarding of
	data is not included.)
Job	This is the operation processing unit to perform copy function,
	print function, scan to send function, fax function and
	document box function of TOE.
Job Data	This data is generated when normal users use copy function,
	scan to send function, print function, FAX function and box
	function to execute jobs.
	The job data is waiting in a job queue for execution. This
	data is deleted, once job is complete.
Job Information	It indicates information that job holds. It mainly indicates jobs
	in operation. However, it also indicates histories of execution
	results.
A list of Job	One that list job information.
Information	
Job Status	This is to confirm on detailed information about job data.
Confirmation	
Box Information	Information that is stored in an area, called "box" when using
	box function. For example, box name, box number, box size etc.
	Security attributes such as box owner and box permission are
	also included in this information.

Table 8-1 Definitions of terms used in this ST

Edit	An operation that modifies data registered by users, such as user
	information and box information.
Move	It is to move document stored in a box to another box.
Join	It is to join multiple documents stored in a box, and create a
	new joined document. Original documents remain.
Preview Send Image	This is one of scan to send function and FAX function operation.
	A function that displays image preview read from a scanner of
	TOE for sending on the operation panel.
Preview Copy Image	This is one of copy function operation.
	A function that displays image preview read from a scanner of
	TOE for copying on the operation panel.
Box Preview	This is one of box function operation.
	It is to display the preview of the document stored in a box on
	the operation screen.
Device Status	Information that shows TOE status. Remaining toner volume,
	papers and mechanical errors are displayed.
Counter Information	Information about counting jobs performed by TOE. When
	print function performs, print counter increases. When scan
	to send function performs, send counter increases.
Image Data	It indicates the image information that is processed inside the
	MFP when TOE normal users use copy function, scan to send
	function, print function, FAX function and box function.
Client PC	It indicates the computers that connect to the network, and
	utilize the TOE services (functions) of the TOEs that are
	connected to the network.
FIPS PUB 180-4	This is an algorithm about a hash function, which is
	standardized by the NIST, U.S. (National Institute of Standards
	and Technology).
FIPS PUB 197	This is an algorithm about the common cryptographic key,
	which is standardized by the NIST, U.S. (National Institute of
	Standards and Technology). Also, this is called "AES".
Management Area	An area within the image data where management information
	for that data is recorded. A logical deletion of image data
	means making this area unrecognizable.
Actual Data Area	An area within the image data where data composing the
	actual image is recorded. When image data is logically
	deleted, this area will remain. This remaining area will be
	called "residue area".

Overwrite-Erase	This is to overwrite on the actual image data area with meaningless character strings when receiving an instruction for deletion of the stored image data in the HDD, and to delete the management information of the image data after the actual data area is completely erased. Thus it disables re-usage of the data.
Operation Panel	This is installed on the uppermost part of the MFP, and is constituted by a liquid crystal panel. It is an external interface, and users can utilize the TOE via this operation panel.

# 8.2. Definition of acronyms

The definitions of the acronyms used in this ST are indicated in Table 8-2.

Acronyms	Definitions
Α.	assumption (when used in hierarchical naming)
ADMIN.	administrator (when used in hierarchical naming)
AES	Advanced Encryption Standard
ALT	alteration
СС	Common Criteria
CONF.	confidential (when used in hierarchical naming)
СРҮ	сору
D.	data (when used in hierarchical naming)
DIS	disclosure
DOC.	document (when used in hierarchical naming)
DSR	document storage and retrieval
EAL	Evaluation Assurance Level
F.	Function (when used in hierarchical naming)
FAX	facsimile
FUNC.	function (when used in hierarchical naming)
HCD	Hardcopy Device
HDD	Hard Disk Drive
IT	information technology
MFP	Multi Functional Printer
NCU	Network Control Unit
NVS	nonvolatile storage

#### Table 8-2 Definitions of acronyms used in this ST

0.	Security Objective (of the TOE) (when used in hierarchical naming)
OE.	Security Objective (of the operational environment) (when used in hierarchical naming)
OSP	organizational security policy
Р.	organizational security policy (when used in hierarchical naming)
PP	Protection Profile
PROT.	protected (when used in hierarchical naming)
PRT	print
SAR	Security Assurance Requirement
SCN	scan
SFP	Security Function Policy
SFR	Security Functional Requirement
SMI	Shared-medium Interface
SSD	Solid State Drive
ST	Security target
Т.	threat (when used in hierarchical naming)
TOE	Target of Evaluation
TSF	TOE security functionality
U.	user (when used in hierarchical naming)
USB	Universal Serial Bus

(The final page)