

IBM z/VM Version 6 Release 1 Security Target

Version: 1.1

Status: Released

Last Update: 2013-01-18

Classification: Public

Trademarks

The following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

- Enterprise Systems Architecture/390
- ESA/390
- IBM
- IBM logo
- HiperSockets
- PR/SM
- Processor Resource/Systems Manager
- RACF
- S/390
- System z
- VM/ESA
- z/Architecture
- z/VM

Other company, product, and service names may be trademarks or service marks of others.

Legal Notice

This document contains information of a public nature.

Review and Approval Process

Refer to the inspection process in the System z Software Programming Process.

Required Reviewers

- Alan Altmark (z/VM Security Architect)
- Brian Hugenbruch

Document Distribution and Change Notification

The document is distributed to the reviewers of this line item. When reissued with changes, the document owner sends a note to the reviewers notifying them of the availability of a new document version.

Archival Requirements

Archival requirement according to the German evaluation and certification scheme is 5 years.

Revision History

Revision	Date	Author(s)	Changes to Previous Revision
0.1	2010-08-26	Alan Altmark	Initial Draft, being a significant rewrite of the version used for z/VM V5.3.
0.2	2010-09-29	Stephan Mueller	Conversion from CC 2.3 to CC 3.1; inclusion of OSPP
0.3	2010-11-11	Stephan Mueller	Addressing evaluator comments

Version: 1.1 Classification: Public Page 2 of 114

Revision	Date	Author(s)	Changes to Previous Revision
0.4	2011-02-21	Stephan Mueller	change to ALC_FLR.2, addition of ID
0.5	2011-06-07	Stephan Mueller	Addition of PTFs
0.6	2011-06-07	Stephan Mueller	Clarification of FTA_SSL.1/2 and FIA_UAU.5
0.7	2011-09-16	Stephan Mueller	Editorial fixes requested by evaluator
0.8	2011-10-06	Stephan Mueller	Update of FCS_RNG.1 discussion
0.9	2012-02-29	Stephan Mueller	Addition of PTF
0.10	2012-03-19	Stephan Mueller	Addition of PTF
0.11	2012-03-27	Stephan Mueller	Fix specification of ASE_CCL.1
1.0	2012-11-26	Stephan Mueller	Editorial updates
1.1	2013-01-18	Stephan Mueller	Clarify the abstract machines allowed in this evaluation, Update FCS_RNG.1 based on BSI comments

Version: 1.1 Classification: Public Page 3 of 114 Last update: 2013-01-18

Table of Contents

1	Introduction	11
	1.1 Security Target Identification	11
	1.2 TOE Identification	11
	1.3 TOE Type	11
	1.4 TOE Overview	11
	1.5 TOE Description	12
	1.5.1 Structure and concept of z/VM	13
	1.5.1.1 Differences from other operating systems	
	1.5.1.2 z/VM's Kernel and non-kernel software	
	1.5.1.3 User's management of virtual machines using the Control Program	
	1.5.1.4 Communication between virtual machines and with the Control	
	Program	
	1.5.2 Intended Method of Use	
	1.5.2.1 Conversational Monitor System (CMS)	
	1.5.3 Summary of Security Features	
	1.5.3.1 Identification and Authentication	
	1.5.3.2 Discretionary Access Control	
	1.5.3.3 Mandatory Access Control and Support for Security Labels	
	1.5.3.4 Separation of virtual machines	
	1.5.3.5 Audit	
	1.5.3.6 Object reuse functionality	
	1.5.3.7 Security Management	
	1.5.4 Configurations	
	1.5.4.1 Software Components	
	1.5.4.2 Software Privileges	
	1.5.4.3 Software Configuration	
	1.5.4.4 Hardware configurations	
2	CC Conformance Claim	
3	Security Problem Definition	
3	3.1 Threat Environment	
	3.1.1 Assets	
	3.1.2 Threat agents	
	3.1.3 Threats countered by the TOE	
	3.2 Assumptions	
	3.2.1 Environment of use of the TOE	
	3.2.1.1 Physical	
	3.2.1.2 Personnel	
	3.2.1.3 Procedural	-
	3.2.1.4 Connectivity	
	3.3 Organizational Security Policies	
4	Security Objectives	

Version: 1.1 Classification: Public Page 4 of 114 Last update: 2013-01-18

	4.1 Objectives for the TOE	
	4.2 Objectives for the Operational Environment	30
	4.3 Security Objectives Rationale	31
	4.3.1 Security Objectives Coverage	31
	4.3.2 Security Objectives Sufficiency	32
5	Extended Components Definition	
	5.1 Class FCS: Cryptographic support	
	5.1.1 Random number generator (RNG)	
	5.1.1.1 FCS_RNG.1 - Random number generation	
6	Security Requirements	
	6.1 TOE Security Functional Requirements	
	6.1.1 Security audit (FAU)	11
	6.1.1.1 Audit data generation (FAU GEN.1)	
	6.1.1.2 User identity association (FAU_GEN.2)	
	6.1.1.3 Audit review (FAU_SAR.1)	
	6.1.1.4 Restricted audit review (FAU_SAR.2)	
	6.1.1.5 Selectable audit review (FAU_SAR.3)	
	6.1.1.6 Selective audit (FAU_SEL.1)	
	6.1.1.7 Protected audit trail storage (FAU_STG.1)	46
	6.1.1.8 Action in case of possible audit data loss (FAU_STG.3)	
	6.1.1.9 Prevention of audit data loss (FAU STG.4)	
	6.1.2 Cryptographic support (FCS)	
	6.1.2.1 Cryptographic key generation (FCS_CKM.1(SYM))	46
	6.1.2.2 Cryptographic key generation (FCS_CKM.1(RSA))	46
	6.1.2.3 Cryptographic key generation (FCS_CKM.1(DSA))	47
	6.1.2.4 Cryptographic key distribution (FCS_CKM.2(NET))	47
	6.1.2.5 Cryptographic key destruction (FCS_CKM.4)	
	6.1.2.6 Cryptographic operation (FCS COP.1(NET))	
	6.1.2.7 Random number generator (Class DRG.2) (FCS_RNG.1)	
	6.1.3 User data protection (FDP)	48
	6.1.3.1 RACF Persistent Storage Object Access Control Policy (FDP ACC.2(RACF-PSO))	.0
	orable rater ensistences espectrices so control ency (i. Breelectrice r. Bey)	48
	6.1.3.2 RACF Transient Storage Object Access Control Policy (FDP_ACC.2(RACF-TSO))	
		49
	6.1.3.3 RACF System Object Access Control Policy (FDP_ACC.2(RACF-SYSTEM))	
		50
	6.1.3.4 Discretionary Access Control Policy by CP (FDP_ACC.2(CP))	50
	6.1.3.5 Access Control Functions by RACF (FDP_ACF.1(RACF))	51
	6.1.3.6 Discretionary Access Control Functions by CP (FDP_ACF.1(CP))	52
	6.1.3.7 Export of user data with security attributes (FDP_ETC.2(LS) (Labeled Security	
	Mode only))	52
	6.1.3.8 Export of user data with security attributes (FDP_ETC.2(VIRT))	53
	6.1.3.9 Complete information flow control (FDP_IFC.2(NI))	53
	6.1.3.10 Complete information flow control (FDP_IFC.2(LS) (Labeled Security Mode	E 4
	only))	54

Version: 1.1 Classification: Public Page 5 of 114 Last update: 2013-01-18

	6.1.3.11	Complete information flow control (FDP_IFC.2(VIRT))	
	6.1.3.12		
	6.1.3.13	· · · · · · · · · · · · · · · · · · ·	56
	6.1.3.14	• • • • • • • • • • • • • • • • • • • •	
	-		56
	6.1.3.15	, , , , , , , , , , , , , , , , , , , ,	
	-	Mode only))	58
	6.1.3.16		58
		Import of user data with security attributes: labeled security (FDP_ITC.2(LS)	58
	6.1.3.18	• • • • • • • • • • • • • • • • • • • •	
	6.1.3.19	· · · · · · · · · · · · · · · · · · ·	
		Full residual information protection (FDF_KIF.2)	
2 1		run residual information protection of resources (FDF_NF.3)	
Э. 1	6.1.4.1	Authentication failure handling (FIA_AFL.1)	
	6.1.4.2	User attribute definition (FIA_ATD.1(HU))	
	6.1.4.3	User attribute definition (FIA_ATD.1(TO))	
	6.1.4.4	_	
	6.1.4.5	Verification of secrets (FIA SOS.1)	
	6.1.4.6	Timing of authentication (FIA UAU.1)	
	6.1.4.7	Multiple authentication mechanisms (FIA UAU.5)	
	6.1.4.8	Protected authentication feedback (FIA_UAU.7)	
		Timing of identification (FIA_UID.1)	
	6.1.4.10	-	
	6.1.4.11	,	
	6.1.4.12	, , , , , , , , , , , , , , , , , , , ,	
s 1		rity management (FMT)	
J. 1	6.1.5.1	Management of object security attributes (FMT MSA.1(DAC))	
		Management of object security attributes: labeled security (FMT MSA.1(LS)	U.S
			63
		Management of security attributes (FMT_MSA.1(VIRT-CIFCP))	
	6.1.5.4	Static attribute initialisation (FMT MSA.3(DAC))	
	6.1.5.5		
	6.1.5.6	Static attribute initialization: labeled security (FMT MSA.3(LS) (Labeled	
	Security	• -	64
	6.1.5.7	Static attribute initialisation (FMT MSA.3(VIRT-CIFCP))	64
	6.1.5.8	Security attribute value inheritance (FMT MSA.4(DAC))	64
	6.1.5.9	Management of TSF data (FMT MTD.1(AE))	65
	6.1.5.10	·	65
	6.1.5.11	Management of TSF data (FMT MTD.1(AT))	65
	6.1.5.12	Management of TSF data (FMT_MTD.1(AF))	65
	6.1.5.13	Management of TSF data (FMT_MTD.1(NI))	65
	6.1.5.14		66
	6.1.5.15	Management of TSF data (FMT_MTD.1(IAF))	66
	6.1.5.16	Management of TSF data (FMT_MTD.1(IAU))	66

Version: 1.1 Classification: Public Page 6 of 114 Last update: 2013-01-18

	6.1.5.17 Management of TSF data (FMT_MTD.1(VIRT-COMP))	. 66
	6.1.5.18 Revocation of Object Attributes (FMT_REV.1(OBJ))	. 66
	6.1.5.19 Revocation of User Attributes (FMT_REV.1(USR))	
	6.1.5.20 Specification of management functions (FMT_SMF.1)	
	6.1.5.21 Security roles (FMT_SMR.1)	
	6.1.6 Protection of the TSF (FPT)	
	6.1.6.1 Reliable time stamps (FPT_STM.1)	
	6.1.6.2 Inter-TSF basic TSF data consistency (FPT_TDC.1(BA))	. 68
	6.1.6.3 Inter-TSF basic TSF data consistency: labeled security (FPT_TDC.1(LS)	
	(Labeled Security Mode only))	
	6.1.6.4 Inter-TSF basic TSF data consistency: virtualization (FPT_TDC.1(VIRT))	
	6.1.7 TOE access (FTA)	
	6.1.7.1 TSF-initiated session locking (FTA_SSL.1)	
	6.1.7.2 User-initiated locking (FTA_SSL.2)	
	6.1.8 Trusted path/channels (FTP)	. 69
	6.1.8.1 Inter-TSF trusted channel (FTP_ITC.1)	
	6.2 Security Functional Requirements Rationale	
	6.2.1 Security Requirements Coverage	. 70
	6.2.2 Security Requirements Sufficiency	
	6.2.3 Security Requirements Dependency Analysis	
	6.2.4 Mutual support of the security functions	
	6.3 Security Assurance Requirements	
	6.3.1 Security Target evaluation (ASE)	
	6.3.1.1 Conformance claims (ASE_CCL.1(CCL))	. 83
	6.4 Security Assurance Requirements Rationale	. 84
7	TOE Summary Specification	
	7.1 TOE Security Functionality	. 85
	7.1.1 Overview of the TOE architecture	
	7.1.2 F.AU: Auditing	. 86
	7.1.2.1 F.AU.1 - Generation of Audit Records	
	7.1.2.2 F.AU.2 - Protection of the Audit Trail	
	7.1.2.3 F.AU.3 - Audit Configuration and Management	
	7.1.3 F.AC: Access Control	
	7.1.3.1 F.AC.1 - General Operation	. 88
	7.1.3.2 F.AC.2 - Profiles	
	7.1.3.3 F.AC.3 - Access control enforcement	. 92
	7.1.3.4 F.AC.4 - Access Control Configuration and Management	. 97
	7.1.3.5 F.AC.5 - Protected Resources	
	7.1.3.6 F.AC.6 - Access control enforcement by CP	. 98
	7.1.4 F.I&A: Identification and Authentication	
	7.1.4.1 F.I&A.1 – Identification and authentication mechanism	
	7.1.4.2 F.I&A.2 - Passwords	100
	7.1.4.3 F.I&A.3 - Identity Change	101
	7.1.5 F.IP: Interference Protection between virtual machines	101

	7	.1.5.1	Access to virtual machines	104
			Virtual machine networking	104
	7.1.6	F.OR:	Object re-use	105
	7.1.7	F.SM	: Security Management	105
	7	.1.7.1	F.SM.1 - Management of user security attributes	106
	7	.1.7.2	F.SM.2 - Management of object security attributes	107
	7	.1.7.3	F.SM.3 - Management of audit	107
			F.SM.4 - Management of system assurance testing	108
	7.1.8	F.TP:	TOE Self Protection	108
			F.TP.1 - Supporting Mechanisms of the Abstract Machine	108
	7	.1.8.2	F.TP.2 - Structure of the TOE	109
8	Abbrevi	ations	s, Terminology and References	111
			ons	111
	8.2 Terr	minolo	gy	111
	8.3 Ref	erence	S	113

List of Tables

Table 1: Mapping of security objectives to threats and policies	31
Table 2: Mapping of security objectives for the Operational Environment to assumptions, threats and policies	
Table 3: Sufficiency of objectives countering threats	33
Table 4: Sufficiency of objectives holding assumptions	35
Table 5: Sufficiency of objectives enforcing Organizational Security Policies	37
Table 6: Security functional requirements for the TOE	40
Table 7: Mapping of security functional requirements to security objectives	70
Table 8: Security objectives for the TOE rationale	73
Table 9: TOE SFR dependency analysis	76
Table 10: Security assurance requirements	
Table 11: RACF user profile	
Table 12: RACF group profile	91
Table 13: RACF resource profile	91
Table 14: Communication channel usage	102

List of Figures

Version: 1.1 Classification: Public Page 10 of 114

1 Introduction

1.1 Security Target Identification

Title: IBM z/VM Version 6 Release 1 Security Target

Version: 1.1

Status: Released
Date: 2013-01-18
Sponsor: IBM Corporation

Developer: IBM z/VM Development

Certification ID: BSI-DSZ-CC-0752

Keywords: access control, discretionary access control, general-purpose operating system,

information protection, security labels, mandatory access control, security,

virtual machine

1.2 TOE Identification

The TOE is z/VM Version 6 Release 1.

1.3 TOE Type

The TOE type is virtual machine operating system implementing a hypervisor.

1.4 TOE Overview

This security target (ST) documents the security characteristics of the IBM z/VM Version 6 Release 1 hypervisor product when configured in a secure manner according to the supplied security guide.

z/VM is a highly secure, flexible, robust, scalable virtual machine hypervisor for IBM System z® mainframe servers onto which to deploy mission-critical virtual servers. A single System z server can host up to 60 instances of z/VM, one per logical partition (LPAR), and each instance of z/VM can host tens to hundreds of virtual servers. Multiple instances of z/VM can be connected to form a networked system called a "collection". The communication aspects within z/VM used for these connections are also part of the evaluation. External communication links can be protected against loss of confidentiality and integrity by cryptographic protection mechanisms not part of the TOE.

Due to the functionality of performing identification and authentication of users, implementation of DAC and MAC, providing management facilities for all security-related functions and the fact that support functionality is hosted in different virtual machines, z/VM also resembles an operating system. Therefore, the Operating System Protection Profile ([OSPP]) is used as a basis for this ST. z/VM meets all of the requirements of the Operating System Protection Profile base [OSPP], as well as its extended packages for labeled security [OSPP-LS] and virtualization [OSPP-VIRT].

z/VM provides identification and authentication of users using different authentication mechanisms, both discretionary and mandatory access control to a large number of different objects, separation of virtual machines, a configurable audit functionality, sophisticated security management functions, preparation of objects for reuse and functionality used internally to protect z/VM from interference and tampering by untrusted users or subjects.

Version: 1.1 Classification: Public Page 11 of 114

1.5 TOE Description

The Target of Evaluation (TOE) is the z/VM virtual machine operating system with the software components as described in section 1.5.4. z/VM is an operating system designed to host other operating systems, each in its own virtual machine. Multiple virtual machine can run concurrently to perform a variety of functions requiring controlled, separated access to the information stored on the system. The TOE provides a virtual machine for each logged in user, separating the execution domain of each user from other users as defined in the virtual machine definitions stored in the system directory. In addition, the system directory contains access control information for privileged functions, such as use of certain options of the processor's DIAGNOSE instruction. In addition to the system directory, the RACF security server is employed to mediate access to resources and privileged functions.

For the purpose of this ST, the TOE is one instance of z/VM running on an abstract machine as the sole operating system on the level of the abstract machine and exercising full control over this abstract machine regardless which software runs inside of virtual machines. This abstract machine is provided by a logical partition (LPAR) of an IBM System z server.

The LPAR itself is not part of the TOE, but belongs to the TOE environment. It is to be noted that although a z/VM instance can be run within a z/VM instance, the evaluated configuration is restricted to one z/VM instance running directly within an LPAR. A z/VM instance running within a virtual machine is allowed, but this "second level" z/VM instance is not in an evaluated configuration, as some security functionality is implemented differently, in particular with respect to the usage of the processor's Start Interpretive Execution (SIE) instruction.

Multiple instances of the TOE may share the RACF database. This is done by sharing the DASD (direct access storage device) volume keeping the RACF database between the different z/VM instances. Although sharing of the RACF database between z/VM and z/OS is technically feasible, it is explicitly excluded from this evaluation.

The platforms selected for the evaluation consist of IBM products, which are available when the evaluation has been completed and will remain available for some period of time afterwards. Even if withdrawn from general marketing, the product may be obtained by special request to IBM.

The TOE security functions (TSF) are provided by the z/VM operating system kernel (called the Control Program – CP) and by an application called RACF that runs within a specially-privileged virtual machine. In addition to providing user authentication, access control, and audit services to CP, RACF can provide the same services to other authorized virtual machines. z/VM provides management functions that allow configuring the TSF and tailor them to the customer's needs.

Some elements have been included in the TOE which do not provide security functions, but run in authorized mode and could therefore, if misbehaved, compromise the TOE. Since these elements are substantial for the operation of many customer environments, they are included as trusted applications within the TOE.

In its evaluated configuration, the TOE allows two modes of operation: a standard mode meeting all requirements of the Operating System Protection Profile base [OSPP] and its extended package for Virtualization [OSPP-VIRT], and a more restrictive mode called Labeled Security Mode, which additionally meets all requirements of the OSPP extended package for Labeled Security [OSPP-LS]. In both modes, the same software elements are used. The two modes have different RACF settings with respect to the use of security labels. All other configuration parameters are identical in the two modes.

Throughout this Security Target, all claims that are valid for the Labeled Security Mode only are marked accordingly. Any claim not marked for Labeled Security Mode applies to both modes.

Version: 1.1 Classification: Public Page 12 of 114

1.5.1 Structure and concept of z/VM

z/VM provides a mechanism to run a heterogeneous mix of z/Architecture® or Enterprise System Architecture/390 (ESA/390) operating systems with overcommitment of processor and memory resources. It provides each end user with an individual working environment known as a virtual machine. The virtual machine simulates the existence of a dedicated real machine, including CPU, memory, operator controls, and input/output (I/O) resources.

Because each virtual machine provides an environment that conforms to the machine architecture, the virtual machine can host a conformant operating system (called a guest). Multiple instances of Linux, z/OS, z/VSE, z/TPF, and even z/VM itself, can run concurrently on the same z/VM system that is supporting z/VM CMS applications and end users. As a result, application development, testing, and production environments can share a single physical computer.

1.5.1.1 Differences from other operating systems

z/VM is similar to any other operating system in that it implements the concepts of:

- Users logging into the system and controlling software acting on behalf of the user
- Access control to memory objects or devices based on rules enforced on users and their associated group or (in Labeled Security Mode) security label assignment
- Nucleus or kernel software running in a privileged and protected environment, controlling and enforcing rules upon subjects and objects
- Management of real and virtual memory and separation of address spaces between different virtual machines
- Scheduling of user software to run multiple software concurrently on one or more processors in a serialized manner

The major difference from a general-purpose operating system is the concept of virtual machines implemented by z/VM. Upon login, each user is provided with a virtual machine that is capable of running arbitrary software. That software must be an operating system, whether it supports a single user or multiple users. Applications run within the operating system. A virtual machine differs from application environment of general-purpose operating systems in the following ways:

- Predefined limits of processors (i.e. definition of logical processors whose number may differ from the number of real processors), processing time (i.e. processing power of logical processors), memory ranges accessible from inside the virtual machine and access to devices are enforced on every virtual machine.
- Virtual machines allow software to run in problem and supervisor state provided by the underlying processors restricted by the limits of the virtual machine z/VM defined by the administrator.
- Hardware can be virtualized. Access to hardware not dedicated for one virtual machine only is virtualized by the TOE (such access to the timer of the abstract machine is mediated by the TOE). Virtualized devices can be accessed the same way, as they would be accessed natively by software inside virtual machines.
- Hardware can be simulated. In some case there is no hardware, but the TOE simulates a hardware device (such as a virtual LAN adapter for providing virtual machines access to the virtual LAN maintained by the TOE). This device can be accessed like any other real hardware from inside the virtual machine using a device driver.
- Pre-defined processor instructions are simulated by the Control Program (CP) to ensure strict separation of virtual machines. z/VM defines the limits of each virtual machine. A set of parameters for the virtual machine environment is loaded into a table within the processor

Classification: Public Version: 1.1 Page 13 of 114 Last update: 2013-01-18

when z/VM passes control to a virtual machine. Whenever the processor detects that an instruction cannot be handled within this "interpreted environment", it generates an interrupt to CP which then handles the instruction by simulating the processor instruction, in addition to well-defined sanity checks. To activate the interpreted environment, the processor provides the Start Interpretive Execution (SIE) instruction.

By using the processor's SIE instruction, the Control Program is capable of maintaining a m:n association between the number of logical processors available in the logical partition z/VM is running in, and the number of virtual processors defined for a virtual machine. Given that an arbitrary number of virtual machines may be active at any one time, it is possible to have more virtual processors demanding access to the CPU than are available in the partition. This time-sharing of the available CPU capacity is implemented in CP by having a pre-emptive scheduler for virtual processors. Pre-emption is implemented by utilizing the SIE instruction's timing mechanism, which allows CP to specify how long the SIE environment is executed by one processor. After the expiry of the timer, the SIE instruction ends, the virtual processor stops, and control is returned to CP.

1.5.1.2 z/VM's Kernel and non-kernel software

The z/VM Control Program (CP) is primarily a real-machine resource manager. CP provides each user with an individual working environment known as a virtual machine. Each virtual machine is a functional equivalent of a real system, sharing the real processor instructions and its functionality, storage, console, and input/output (I/O) device resources.

CP provides connectivity support that allows application programs running within virtual machines to exchange information with each other and to access resources residing on the same z/VM system or on different z/VM systems.

In order to create and maintain these rules (virtual machine definitions), additional management software is employed, that runs outside the CP, but is part of the TOE. Hence, each component of the management software runs within a virtual machine. The following list illustrates, which functionality runs within virtual machines:

- CMS: a single-user general-purpose operating system that is employed to run the RACF and TCP/IP applications. See section 1.5.2.1 for details on the intended usage of CMS in the evaluated configuration
- RACF server: provides authentication, authorization, and audit services to CP and other authorized virtual machines that run applications on CMS. It communicates with CP through a tightly-controlled well-defined interface.
- TCP/IP server: provides traditional IP-based communications services. It is not part of CP, but runs within a virtual machine.

Imbedded within the TCP/IP stack is the Telnet service that enables users to access their virtual machine consoles ("log on") from the IP network. In particular, this Telnet service receives console traffic from the network, removes the telnet or TN3270 protocol wrappers, and then forwards it to CP using a special form of the DIAGNOSE processor instruction. CP generates a virtual console session as a memory object. All outgoing information is sent from the CP back to the Telnet service, which encapsulates the information in the Telnet or TN3270E protocol and sends it back to the client. The TCP/IP server also provides SSL/TLS allowing the establishment of a cryptographically secured channel.

Version: 1.1 Classification: Public Page 14 of 114

Last update: 2013-01-18

1.5.1.3 User's management of virtual machines using the Control Program

The login facility is provided by the Control Program (CP). When a user connects to the z/VM system, they are presented with a welcome message or logo screen. At that point they are prompted to provide their credentials, which consist of a user ID (the name of the virtual machine) and a password. CP hands the credentials to RACF for validation and, if successful, creates the virtual machine environment and connects the user's terminal to the virtual machine. This connection is referred to as the virtual machine operator's console, or simply the virtual console.

CP provides an interactive shell on the virtual console with which the user can enter CP commands to manipulate the virtual machine. After an operating system is IPLed, the console is treated as an I/O device visible to the guest operating system. If desired, the user may explicitly direct the console to communicate with CP. Thus the console serves two purposes after IPL. There may be multiple terminal devices (e.g. 3270s) available to the virtual machine, but only the virtual machine operator's console be used to communicate with CP. Any other terminal devices can communicate only with the guest operating system.

The virtual machine definition typically contains a directive to cause the guest operating system to start automatically at logon. If not, the user can manually IPL the guest.

The virtual machine is initialized with an administrator-predefined virtual machine definition. While the virtual machine is running, the user of the virtual machine may be allowed to alter the virtual machine definition by using the console interface to the CP. These changes are not stored; hence they are in effect until the user logs off from his virtual machine.

If the virtual machine definition contains a CONSOLE statement, the virtual console will be visible to the software running in the virtual machine and can be used to communicate with the quest operating system or applications.

Interfaces to CP for software running in virtual machines are provided using processor instructions (DIAGNOSE, IUCV).

1.5.1.4 Communication between virtual machines and with the Control **Program**

z/VM offers the following communication facilities:

- A virtual LAN segment or switch that simulates an ethernet or System z HiperSockets network. They can be used to communicate between virtual machines or, in the case of the virtual switch, with external (physical) LAN segments. This is provided as part of the virtual I/O subsystem for the virtual machine.
- VMCF (Virtual Machine Communication Facility) provides bidirectional communication channels between virtual machines. This is provided by the DIAGNOSE 0x68 instruction.
- IUCV (Inter-User Communication Vehicle) offers bidirectional communication channels between virtual machines or between a virtual machine and CP. This is provided by the IUCV (0xB2F0) instruction.
- CP commands MESSAGE (MSG), SMSG, and WARNING (WNG) provide unidirectional communication channels between virtual machines. Users can send messages to each other, but there is no "reply" mechanism. This is available to the guest by command at the virtual console or by the use of DIAGNOSE 0x08 by the guest operating system.
- Virtual Channel-To-Channel simulates the functions of a point-to-point channel connection, providing a bidirectional communication channel between virtual machines. This is provided as part of the virtual I/O subsystem for the virtual machine.

Version: 1.1 Classification: Public Page 15 of 114 Last update: 2013-01-18

All listed communication channels are established and maintained by CP. CP protects them against spoofing or eavesdropping ("sniffing").

In addition to the explicitly-defined communication channels above, CP allows the configuration of:

- Shared disk space between virtual machines. CP does not control the access to data stored
 in these shared devices but performs access control when initially linking to the disk; hence,
 the software inside the accessing virtual machines must have some sort of synchronization
 mechanism such as Reserve/Release to avoid data inconsistencies on shared disk space.
- Shared memory between virtual machines. CP allows the following types of sharing:
 - Private memory: this memory is not shared
 - Shared exclusive write: shared memory is allocated once and accessible from virtual machines. Upon first write access, the complete memory area is copied to the write-accessible virtual machine memory. The copied memory is marked as private memory and access to the shared memory area is prohibited.
 - Shared write: a memory area is shared between virtual machines. All virtual machines with access have read and write access to this memory area.
 - Read only: a memory area is shared between virtual machines. However, all virtual machines with access have read-only access to this memory area.

It is to be noted that processor signaling using the SIGP processor instruction is limited to virtual processors belonging to the signaling virtual machine. CP ensures that these signals do not traverse the virtual machine boundary.

1.5.2 Intended Method of Use

z/VM provides a general computing environment that allows users (virtual machines) to gain controlled access to Control Program (CP)-managed resources in different ways:

- Using CP commands from the virtual machine console accessible locally or remotely by Telnet connections via the Telnet service provided by the TCP/IP stack application running in a dedicated virtual machine.
- Access of resources assigned to this virtual machine in the virtual machine definition. The operating system just "sees" those resources assigned to the virtual machine.
- Access to additional authorized resources by use of CP commands issued from the virtual console or via the DIAGNOSE 0x08 instruction. The virtual console may be accessed from
 - A local terminal physically attached to the system,
 - A remote terminal accessing the system using the telnet service provided by the TCP/IP stack application running in a dedicated virtual machine,
 - Another virtual machine that has been authorized to take control of the user's virtual console.
- Execution of a processor instruction by software running inside a virtual machine causing the SIE instruction to terminate and to return the processor control to the CP for simulating the instruction.
- Communication with CP or other virtual machines from inside the virtual machine using the processor's DIAGNOSE instruction, which is defined by the architecture to be intercepted in all cases and simulated by CP.

All users of the TOE are assigned a unique user identifier (user ID). This user ID is used as the basis for access control decisions and for accountability purposes and associates the user with a set of security attributes. The TOE authenticates the claimed identity of a user before allowing this user

Version: 1.1 Classification: Public Page 16 of 114

to perform any further actions. After successful authentication, the user's associated virtual machine is created based on the virtual machine definition. The virtual machine identifier is identical with the user ID. Hence, the virtual machine ID is used as a synonym to the user ID and managed identically by the TOE.

All TOE resources are under control of the TOE. The TOE mediates access of subjects to TOE-protected objects based on discretionary and/or mandatory access rights. Subjects in the TOE are called virtual machines. They are the active entities that may act on behalf of users. Data is stored in named objects. The TOE can associate a set of security attributes with each named resource, which includes the description of the access rights to that object and (in Labeled Security Mode) a security label.

Objects are owned by users, who are assumed to be capable of assigning discretionary access rights to their objects in accordance with the organizational security policies. Ownership of named objects can be transferred under the control of the access control policy. In Labeled Security Mode, security labels are assigned by the TOE, either automatically upon creation of the object or by the trusted system administrator. The security attributes of users, data objects, and objects through which the information is passed are used to determine if information may flow through the system as requested by a user.

Apart from normal users, z/VM recognizes administrative users with special authorizations. They are trusted to perform system administration and maintenance tasks, which includes configuration of the security policy enforced by the z/VM system and attributes related to it. Authorizations can be delegated to other administrative users by updating their security attributes. The TOE also recognizes the role of an auditor, who uses the audit system provided by z/VM to monitor the system usage according to the organizational security policies.

The TOE is intended to operate in a networked environment with other instantiations of the TOE as well as other well-behaved systems operating within the same management domain. All those systems need to be configured in accordance with a defined common security policy.

1.5.2.1 Conversational Monitor System (CMS)

CMS is used as operating systems for TOE applications (such as TCP/IP). The following information concludes that no functionality of CMS is security relevant as it can be considered as a form of library to mediate operations from the TOE applications to the CP.

CMS is a single-user general-purpose operating system delivered with z/VM. It is to be used to run the TCP/IP application in a virtual machine and the RACF security server. Customers can write their own applications to be run on CMS either its native or POSIX-conformant application programming interfaces (APIs).

Although being a general-purpose operating system, CMS offers no security functionality claimed in this document. Security functions are implemented by servers that run as applications on top of CMS. CMS uses CP communication channels (such as IUCV) for ensuring the confidentiality and integrity of the communication with the servers. In addition, these communication channels ensure that the communication partner is really the expected partner (i.e. the communication channels ensure that when CMS assumes to communicate with the Shared File System server, it really speaks with it). Security functions such as listed the following are provided by the filesystem servers:

- Access control and audit for the Shared File System (SFS)
- Access control and auditing for the Byte File System (BFS)

However, when using CMS to run TOE components, the following restrictions apply:

CMS is configured to run TOE components individually in different virtual machines.

Classification: Public Version: 1.1 Page 17 of 114 Last update: 2013-01-18

- Each CMS instance running a TOE component must only be used to run this component. No other service must be provided by this CMS instance.
- Each CMS instance running a TOE component must be restricted to be manageable by authorized users only.
- Each CMS instance running a TOE component must not use SFS (i.e. the virtual machine definition assigns only exclusive minidisks to the virtual machine).
- The virtual machine definition only assigns private memory for the virtual machines running CMS with a TOE component. However, it is permitted to boot CMS from the commonly shared read only code segment (Named Saved System, NSS) containing the CMS binary object code.

These restrictions allow CMS to be treated as a supporting library for this evaluation, since no security functionality required for the operation of the TOE is provided by CMS. CMS is only required to provide a runtime environment for TOE applications.

1.5.3 Summary of Security Features

The primary security features of the product are:

- Identification and authentication
- Discretionary access control
- Mandatory access control and support for security labels in Labeled Security Mode
- Separation of virtual machines
- Audit
- Object reuse functionality
- Security management
- TSF protection

These primary security features are supported by domain separation and reference mediation, which ensure that the features are always invoked and cannot be bypassed.

1.5.3.1 Identification and Authentication

z/VM provides identification and authentication of users by the means of an alphanumeric user ID and a system-encrypted password. The following parts of the TOE perform identification and authentication independently:

- Control Program
- RACF

For performing identification and authentication, z/VM employs RACF managing resource profiles and user profiles.

1.5.3.2 Discretionary Access Control

For implementation of extended DAC rules, RACF provides the capability and flexibility as required by the evaluation compared to the usage of the system. Hence, the evaluated configuration of z/VM includes RACF. Basically, a user's authority to access a resource while operating in a RACF-protected system at any time is determined by a combination of these factors:

- User's identity and group membership
- User's attributes including group-level attributes
- User's group authorities

Version: 1.1 Classification: Public Page 18 of 114

- Security classification of the user and the resource profile (this specified in section 1.5.3.3)
- Access authority specified in the resource profile

1.5.3.3 Mandatory Access Control and Support for Security Labels

In addition to DAC, z/VM provides Mandatory Access Control (MAC), which imposes access restrictions to information based on security classification. Each user and each RACF controlled object can have a security classification specified in its profile. The security classification can be a security level and zero or more security categories. Security labels are maintained separately from privilege classes in RACF.

The access control enforced by the TOE ensures that users may only read labeled information if their security label dominates the information's label, and that they may only write to labeled information containers if the container's label dominates the subject's.

1.5.3.4 Separation of virtual machines

Operating system failures that occur in virtual machines do not normally affect the z/VM operating system running on the real processor. If the error is isolated to a virtual machine, only that virtual machine fails, and the user can re-IPL without affecting the testing and production work running in other virtual machines.

Supported by the underlying processor, the TOE restricts results of software failures (such as program checks) occurring in a virtual machine to this machine, thus not affecting other virtual machines or the CP.

Failures of CP that cannot be isolated to a particular virtual machine result in the abnormal termination ("abend") of the Control Program. In the event of such an abend, the system will re-initialize itself, if possible. Special abend code numbers are used to identify the specific reason for the abend.

1.5.3.5 Audit

The TOE provides an audit capability that allows generating audit records for security critical events. RACF provides a number of logging and reporting functions that allow resource owners and auditors to identify users who attempt to access the resource. The audit records generated by RACF are collected into files residing on disks that are protected from unauthorized modification or deletion by the DAC and (in Labeled Security Mode) MAC mechanism.

1.5.3.6 Object reuse functionality

The TOE provides a facility clearing protected objects and storage previously used by virtual machines or the TOE itself prior to reassignment to other virtual machines or the TOE. This ensures confidentiality of data maintained either by the TOE or by virtual machines.

DASD devices and their derivatives (such as minidisks or temporary disks) are to be cleared manually by the administrator in accordance with the organizational policies. There is additional software support by the IBM Directory Maintenance Facility (DirMaint), which however is not part of this evaluation

Classification: Public Version: 1.1 Page 19 of 114 Last update: 2013-01-18

1.5.3.7 Security Management

z/VM provides a set of commands and options to adequately manage the TOE's security functions. The TOE recognizes several roles that are able to perform the different management tasks related to the TOE's security:

- General security options are managed by security administrators.
- Management of MAC attributes is performed by security administrators in Labeled Security Mode.
- Management of users and their security attributes is performed by security administrators. Management of groups can be delegated to group security administrators.
- Management of virtual machine definitions is performed by security administrators.
- Users are allowed to change their own password, their default group, and their user name.
- Users may choose their security label from the range defined in their profile at login time in LSPP mode.
- Auditors manage the parameters of the audit system (e.g. list of audited events) and can analyse the audit trail.

1.5.3.8 TSF Protection

The z/VM control program enforces integrity of its own domain. No virtual machine can access TOE resources without appropriate authorization. This prevents tampering with TOE resources by untrusted subjects.

Supportive to this functionality are hardware implemented facilities, namely the Interpretive-Execution Facility (SIE instruction). Therefore the hardware and firmware components providing the abstract machine for the TOE are required to be physically protected from unauthorized access.

1.5.4 Configurations

1.5.4.1 Software Components

The Target of Evaluation, IBM z/VM Version 6 Release 1, requires the following software components to be installed, enabled, and configured:

- CMS for operating RACF and TCP/IP
- Control Program (CP)
- RACF Security Server feature
- TCP/IP for z/VM
- PTF UM90240 (RSU4)
- PTF UM33246 (Super Cor PTF for 0910)
- PTF UK76856 (SSL APARs PM52716 and PM43382)

Apart from these required elements, the following elements may be used in the system:

• SSL support for the network communication

1.5.4.2 Software Privileges

The following description defines an unprivileged and a privileged user.

Version: 1.1 Classification: Public Page 20 of 114

An unprivileged user is defined as a virtual machine which (these options are documented in the guidance):

- Has AT MOST the CP commands available in IBM-defined privilege class G (it may have fewer)
- Does not have SPECIAL, group-SPECIAL, CLAUTH, AUDITOR or group-AUDITOR, OPERATIONS or group-OPERATIONS authority to RACF
- Does not have COMSRV, DIAG88, DIAG98, DEVMAINT, MAINTCCW, or SETORIG options in its CP directory entry.
- Does not have access to the VM directory (source or object forms)
- Does not have read-write access to the PARM disk(s), or other system areas of CP-owned volumes
- Does not have read-write access to the source or object code of CP, CMS, RACF, or VM TCP/IP.
- Does not have read-write access to the RACF database.
- Does not have read-write access to the RACF audit trail.
- Does not have OBEY authority for VM TCP/IP or other form of administrative authority over a virtual machine that has any of the special privileges described above.

All other virtual machines are considered to be Trusted Users or Administrators. A Trusted User has access to additional sensitive resources, system services or commands, but cannot alter it's own configuration or bypass DAC controls of resources it does not own, change ownership of system resource, and cannot disable system MAC controls which is possible to an administrator.

1.5.4.3 Software Configuration

The TOE software components allow a broad range of configuration possibilities. However, to implement all security requirements, restrictions on the configuration must be made.

The Secure Configuration Guide provides instructions and constraints for the evaluated configuration.

1.5.4.4 Hardware configurations

The following assumptions about the technical environment of the TOE are made.

In this ST, the TOE is seen as one instance of z/VM running on an abstract machine as the sole operating system and exercising full control over this abstract machine. This abstract machine can be provided by one of the following: a logical partition provided by a certified version of PR/SM on an IBM System z processor:

- IBM System z10 Business Class
- IBM System z10 Enterprise Class
- zEnterprise 114
- zEnterprise 196

The abstract machine itself is not part of the TOE, rather, it belongs to the TOE environment. Nevertheless the correctness of separation and memory protection mechanisms implemented in the abstract machine is analyzed as part of the evaluation since those functions are crucial for the security of the TOE.

The following peripherals can be used with the TOE preserving the security functionality:

all terminals supported by the TOE

Version: 1.1 Classification: Public Page 21 of 114

- all storage devices supported by the TOE
- all network adapters supported by the TOE

Version: 1.1 Classification: Public Page 22 of 114

2 CC Conformance Claim

This ST is CC Part 2 extended and CC Part 3 conformant, with a claimed Evaluation Assurance Level of EAL4, augmented by ALC FLR.3.

This ST claims conformance to the following Protection Profiles:

- [OSPP]: Operating System Protection Profile (with exception of SFR FCS RNG.1, which is superseded by FCS RNG.1 in section 5.1). Version 2.0 as of 2010-06-01; strict conformance.
- [OSPP-LS]: OSPP Extended Package Labeled Security. Version 2.0 as of 2010-05-28; strict conformance.
- [OSPP-VIRT]: OSPP Extended Package Virtualization. Version 2.0 as of 2010-05-28; strict conformance.

Common Criteria [CC] version 3.1 revision 3 is the basis for this conformance claim.

Version: 1.1 Classification: Public Page 23 of 114 Last update: 2013-01-18

3 Security Problem Definition

3.1 Threat Environment

Threats to be countered by the TOE are characterized by the combination of an asset being subject to a threat, a threat agent and an adverse action.

3.1.1 Assets

Assets to be protected are:

- Persistent storage objects used to store user data and/or TSF data, where this data needs to be protected from any of the following operations:
 - Unauthorized read access
 - Unauthorized modification
 - Unauthorized deletion of the object
 - Unauthorized creation of new objects
 - Unauthorized management of object attributes
- Transient storage objects, including network data
- TSF functions and associated TSF data
- The resources managed by the TSF that are used to store the above-mentioned objects, including the metadata needed to manage these objects

3.1.2 Threat agents

Threat agents are external entities that potentially may attack the TOE. They satisfy one or more of the following criteria:

- External entities not authorized to access assets may attempt to access them either by masquerading as an authorized entity or by attempting to use TSF services without proper authorization.
- External entities authorized to access certain assets may attempt to access other assets they are not authorized to either by misusing services they are allowed to use or by masguerading as a different external entity.
- Untrusted subjects (i.e. compartments) may attempt to access assets they are not authorized to either by misusing services they are allowed to use or by masguerading as a different subject.

Threat agents are typically characterized by a number of factors, such as expertise, available resources, and motivation, with motivation being linked directly to the value of the assets at stake. The TOE protects against intentional and unintentional breach of TOE security by attackers possessing an enhanced-basic attack potential.

The following threats are addressed by the TOE. All threats have been copied from the [OSPP] and extended packages. As in the [OSPP], there are no threats and policies to justify the assurance level.

Version: 1.1 Classification: Public Page 24 of 114 Last update: 2013-01-18

3.1.3 Threats countered by the TOE

T.ACCESS.TSFDATA

A threat agent might read or modify TSF data without the necessary authorization when the data is stored or transmitted.

T.ACCESS.USERDATA

A threat agent might gain access to user data stored, processed or transmitted by the TOE without being appropriately authorized according to the TOE security policy.

T.ACCESS.TSFFUNC

A threat agent might use or modify functionality of the TSF without the necessary privilege to grant itself or others unauthorized access to TSF data or user data.

T.ACCESS.COMM

A threat agent might access a communication channel that establishes a trust relationship between the TOE and another remote trusted IT system or masquerade as another remote trusted IT system.

T.RESTRICT.NETTRAFFIC

A threat agent might get access to information or transmit information to other recipients via network communication channels without authorization for this communication attempt by the information flow control policy.

T.IA.MASQUERADE

A threat agent might masquerade as an authorized entity including the TOE itself or a part of the TOE in order to gain unauthorized access to user data, TSF data, or TOE resources.

T.IA.USER

A threat agent might gain access to user data, TSF data or TOE resources with the exception of public objects without being identified and authenticated.

T.DATA_NOT_SEPARATED

The TOE might not adequately separate data on the basis of its sensitivity label, thereby allowing information to flow illicitly from or to users.

T.ACCESS.COMPENV

A threat agent might utilize or modify the runtime environment of other compartments in an unauthorized manner.

T.INFOFLOW.COMP

A threat agent might get access to information without authorization by the information flow control policy.

Version: 1.1 Classification: Public Page 25 of 114 Last update: 2013-01-18

T.COMM.COMP

A threat agent might access the data communicated between compartments or between a compartment and an external entity to read or modify the transferred data.

3.2 Assumptions

This section describes the security aspects of the environment in which the TOE is intended to be used. It includes information about the physical, personnel, procedural, and connectivity aspects of the environment.

The TOE is assured to provide effective security measures in a cooperative non-hostile environment only if it is installed, managed, and used correctly. The operational environment must be managed in accordance with user/administrator guidance documentation. The following specific conditions are assumed to exist in an environment where the TOE is employed.

3.2.1 Environment of use of the TOE

3.2.1.1 Physical

A.PHYSICAL

It is assumed that the IT environment provides the TOE with appropriate physical security, commensurate with the value of the IT assets protected by the TOE.

3.2.1.2 Personnel

A.MANAGE

The TOE security functionality is managed by one or more competent individuals. The system administrative personnel are not careless, willfully negligent, or hostile, and will follow and abide by the instructions provided by the guidance documentation.

A.AUTHUSER

Authorized users possess the necessary authorization to access at least some of the information managed by the TOE and are expected to act in a cooperating manner in a benign environment.

A.TRAINEDUSER

Users are sufficiently trained and trusted to accomplish some task or group of tasks within a secure IT environment by exercising complete control over their user data.

3.2.1.3 Procedural

A.DETECT

Any modification or corruption of security-enforcing or security-relevant files of the TOE, user or the underlying platform caused either intentionally or accidentally will be detected by an administrative user.

Version: 1.1 Classification: Public Page 26 of 114

A.PEER.MGT

All remote trusted IT systems trusted by the TSF to provide TSF data or services to the TOE, or to support the TSF in the enforcement of security policy decisions are assumed to be under the same management control and operate under security policy constraints compatible with those of the TOE.

A.PEER.FUNC

All remote trusted IT systems trusted by the TSF to provide TSF data or services to the TOE, or to support the TSF in the enforcement of security policy decisions are assumed to correctly implement the functionality used by the TSF consistent with the assumptions defined for this functionality.

3.2.1.4 Connectivity

A.CONNECT

All connections to and from remote trusted IT systems and between physically-separate parts of the TSF not protected by the TSF itself are physically or logically protected within the TOE environment to ensure the integrity and confidentiality of the data transmitted and to ensure the authenticity of the communication end points.

3.3 Organizational Security Policies

P.ACCOUNTABILITY

The users of the TOE shall be held accountable for their security-relevant actions within the TOF.

P.USER

Authority shall only be given to users who are trusted to perform the actions correctly.

P.CLEARANCE

The system must limit information flow between protected resources and authorized users based on whether the user's sensitivity label is appropriate for the labeled information.

P.LABELED OUTPUT

The beginning and end of all paged, hardcopy output must be marked with sensitivity labels that properly represent the sensitivity label of the output.

P.RESOURCE LABELS

All resources accessible by subjects and all subjects must have associated labels identifying the sensitivity levels of data contained therein.

P.USER CLEARANCE

All users must have a clearance level identifying the maximum sensitivity levels of data they may access.

Version: 1.1 Classification: Public Page 27 of 114 Last update: 2013-01-18

4 Security Objectives

This section defines the security objectives of the TSF and its supporting environment. Security objectives, categorized as either IT security objectives or non-IT security objectives, reflect the stated intent to counter identified threats, comply with any organizational security policies identified, or both. All of the identified threats and organizational policies are addressed under one of the following categories.

4.1 Objectives for the TOE

O.AUDITING

The TSF must be able to record defined security-relevant events (which usually include security-critical actions of users of the TOE). The TSF must protect this information and present it to authorized users if the audit trail is stored on the local system. The information recorded for security-relevant events must contain the time and date the event happened and, if possible, the identification of the user that caused the event, and must be in sufficient detail to help the authorized user detect attempted security violations or potential misconfiguration of the TOE security features that would leave the IT assets open to compromise.

O.CRYPTO.NET

The TSF must allow authorized users to remotely access the TOE using a cryptographically-protected network protocol that ensures integrity and confidentiality of the transported data and is able to authenticate the end points of the communication. Note that the same protocols may also be used in the case where the TSF is physically separated into multiple parts that must communicate securely with each other over untrusted network connections.

O.DISCRETIONARY.ACCESS

The TSF must control access of subjects and/or users to named resources based on identity of the object. The TSF must allow authorized users to specify for each access mode which users/subjects are allowed to access a specific named object in that access mode.

O.NETWORK.FLOW

The TOE shall mediate communication between sets of TOE network interfaces, between a network interface and the TOE itself, and between subjects in the TOE and the TOE itself in accordance with its security policy.

O.SUBJECT.COM

The TOE shall mediate communication between subjects acting with different subject security attributes in accordance with its security policy.

O.I&A

The TOE must ensure that users have been successfully authenticated before allowing any action the TOE has defined to provide to authenticated users only.

Version: 1.1 Classification: Public Page 28 of 114

O.MANAGE

The TSF must provide all the functions and facilities necessary to support the authorized users that are responsible for the management of TOE security mechanisms and must ensure that only authorized users are able to access such functionality.

O.TRUSTED CHANNEL

The TSF must be designed and implemented in a manner that allows for establishing a trusted channel between the TOE and a remote trusted IT system that protects the user data and TSF data transferred over this channel from disclosure and undetected modification and prevents masquerading of the remote trusted IT system.

O.LS.CONFIDENTIALITY

The TOE will control information flow between entities and resources based on the sensitivity labels of users and resources.

O.LS.PRINT

The TOE will provide the capability to mark printed output with accurate labels based on the sensitivity label of the subject requesting the output.

O.LS.LABEL

The TOE will provide the capability to label all subjects, and all objects accessible by subjects, to restrict information flow based on the sensitivity labels.

O.COMP.INFO_FLOW_CTRL

The TOE will control information flow between compartments under the control of the TOE, based on security attributes of these compartments and potentially other TSF data (e.g., security attributes of objects). This information flow control policy must be able to allow the isolation of individual compartments from other compartments controlled by the TOE.

O.COMP.RESOURCE ACCESS

The TOE will control access of compartments to objects and resources under its control based on:

- security attributes of the objects,
- · security attributes of the compartment that attempts to access the object, and
- the type of access attempted.

The rules that determine access may be based on the value of other TSF data. Access must be controlled down to individual compartments and objects.

O.COMP.IDENT

Last update: 2013-01-18

For each access request, the TOE is able to identify the compartment requesting to access resources, objects or information.

4.2 Objectives for the Operational Environment

OE.ADMIN

Those responsible for the TOE are competent and trustworthy individuals, capable of managing the TOE and the security of the information it contains.

OE.REMOTE

If the TOE relies on remote trusted IT systems to support the enforcement of its policy, those systems provide the functions required by the TOE and are sufficiently protected from any attack that may cause those functions to provide false results.

OE.INFO PROTECT

Those responsible for the TOE must establish and implement procedures to ensure that information is protected in an appropriate manner. In particular:

- All network and peripheral cabling must be approved for the transmittal of the most sensitive data held by the system. Such physical links are assumed to be adequately protected against threats to the confidentiality and integrity of the data transmitted.
- DAC protections on security-relevant files (such as audit trails and authentication databases) shall always be set up correctly.
- Users are authorized to access parts of the data managed by the TOE and are trained to exercise control over their own data.

OE.INSTALL

Those responsible for the TOE must establish and implement procedures to ensure that the hardware, software and firmware components that comprise the system are distributed, installed and configured in a secure manner supporting the security mechanisms provided by the TOE.

OE.MAINTENANCE

Authorized users of the TOE must ensure that the comprehensive diagnostics facilities provided by the product are invoked at every scheduled preventative maintenance period.

OE.PHYSICAL

Those responsible for the TOE must ensure that those parts of the TOE critical to enforcement of the security policy are protected from physical attack that might compromise IT security objectives. The protection must be commensurate with the value of the IT assets protected by the TOE.

OE.RECOVER

Those responsible for the TOE must ensure that procedures and/or mechanisms are provided to assure that after system failure or other discontinuity, recovery without a protection (security) compromise is achieved.

Version: 1.1 Classification: Public Page 30 of 114

OE.TRUSTED.IT.SYSTEM

The remote trusted IT systems implement the protocols and mechanisms required by the TSF to support the enforcement of the security policy.

These remote trusted IT systems are under the same management domain as the TOE, are managed based on the same rules and policies applicable to the TOE, and are physically and logically protected equivalent to the TOE.

4.3 Security Objectives Rationale

4.3.1 Security Objectives Coverage

The following table provides a mapping of TOE objectives to threats and policies, showing that each objective counters or enforces at least one threat or policy, respectively.

Objective	Threats / OSPs
O.AUDITING	P.ACCOUNTABILITY
O.CRYPTO.NET	T.ACCESS.TSFDATA T.ACCESS.USERDATA T.ACCESS.TSFFUNC
O.DISCRETIONARY.ACCESS	T.ACCESS.TSFDATA T.ACCESS.USERDATA
O.NETWORK.FLOW	T.RESTRICT.NETTRAFFIC
O.SUBJECT.COM	T.ACCESS.TSFDATA T.ACCESS.USERDATA
O.I&A	T.IA.MASQUERADE T.IA.USER
O.MANAGE	T.ACCESS.TSFFUNC P.ACCOUNTABILITY P.USER
O.TRUSTED_CHANNEL	T.ACCESS.COMM
O.LS.CONFIDENTIALITY	T.DATA_NOT_SEPARATED P.CLEARANCE P.USER_CLEARANCE
O.LS.PRINT	P.LABELED_OUTPUT
O.LS.LABEL	P.RESOURCE_LABELS P.USER_CLEARANCE
O.COMP.INFO_FLOW_CTRL	T.INFOFLOW.COMP
O.COMP.RESOURCE_ACCESS	T.ACCESS.COMPENV T.COMM.COMP

Version: 1.1 Classification: Public Page 31 of 114 Last update: 2013-01-18

Objective	Threats / OSPs
O.COMP.IDENT	T.ACCESS.COMPENV T.INFOFLOW.COMP T.COMM.COMP

Table 1: Mapping of security objectives to threats and policies

The following table provides a mapping of the objectives for the Operational Environment to assumptions, threats and policies, showing that each objective holds, counters or enforces at least one assumption, threat or policy, respectively.

Objective	Assumptions / Threats / OSPs
OE.ADMIN	A.MANAGE A.AUTHUSER A.TRAINEDUSER
OE.REMOTE	A.CONNECT T.ACCESS.COMM
OE.INFO_PROTECT	A.PHYSICAL A.MANAGE A.AUTHUSER A.TRAINEDUSER P.USER
OE.INSTALL	A.MANAGE A.DETECT
OE.MAINTENANCE	A.DETECT
OE.PHYSICAL	A.PHYSICAL
OE.RECOVER	A.MANAGE A.DETECT
OE.TRUSTED.IT.SYSTEM	A.PEER.MGT A.PEER.FUNC A.CONNECT

Table 2: Mapping of security objectives for the Operational Environment to assumptions, threats and policies

4.3.2 Security Objectives Sufficiency

The following rationale provides justification that the security objectives are suitable to counter each individual threat and that each security objective tracing back to a threat, when achieved, actually contributes to the removal, diminishing or mitigation of that threat:

Version: 1.1 Classification: Public Page 32 of 114 Last update: 2013-01-18

Threat	Rationale for security objectives
T.ACCESS.TSFDATA	The threat of accessing TSF data without proper authorization is removed by: O.CRYPTO.NET requiring cryptographically-protected communication channels for data including TSF data controlled by the TOE in transit between trusted IT systems, O.DISCRETIONARY.ACCESS requiring that data, including TSF data stored with the TOE, have discretionary access control protection, O.SUBJECT.COM requiring the TSF to mediate communication between subjects.
T.ACCESS.USERDATA	The threat of accessing user data without proper authorization is removed by: O.CRYPTO.NET requiring cryptographically-protected communication channels for data including user data controlled by the TOE in transit between trusted IT systems, O.DISCRETIONARY.ACCESS requiring that data including user data stored with the TOE, have discretionary access control protection, O.SUBJECT.COM requiring the TSF to mediate communication between subjects.
T.ACCESS.TSFFUNC	The threat of accessing TSF functions without proper authorization is removed by: O.CRYPTO.NET requiring cryptographically-protected communication channels to limit which TSF functions are accessible to external entities, O.MANAGE requiring that only authorized users utilize management TSF functions.
T.ACCESS.COMM	 The threat of accessing a communication channel that establishes a trust relationship between the TOE and another remote trusted IT system is removed by: O.TRUSTED_CHANNEL requiring that the TOE implements a trusted channel between itself and a remote trusted IT system protecting the user data and TSF data transferred over this channel from disclosure and undetected modification and prevents masquerading of the remote trusted IT system, OE.REMOTE requiring that those systems providing the functions required by the TOE are sufficiently protected from any attack that may cause those functions to provide false results.
T.RESTRICT.NETTRAFFIC	The threat of accessing information or transmitting information to other recipients via network communication channels without authorization for this communication attempt is removed by: O.NETWORK.FLOW requiring the TOE to mediate the communication between itself and remote entities in accordance with its security policy.

Version: 1.1 Classification: Public Page 33 of 114 Last update: 2013-01-18

Threat	Rationale for security objectives
T.IA.MASQUERADE	The threat of masquerading as an authorized entity in order to gain unauthorized access to user data, TSF data or TOE resources is removed by: O.I&A requiring that each entity interacting with the TOE is properly identified and authenticated before allowing any action the TOE is defined to provide to authenticated users only.
T.IA.USER	The threat of accessing user data, TSF data or TOE resources without being identified and authenticated is removed by: O.I&A requiring that each entity interacting with the TOE is properly identified and authenticated before allowing any action the TOE has defined to provide to authenticated users only.
T.DATA_NOT_SEPARATED	The threat of not adequately separating data on the basis of its sensitivity label, thereby allowing information to flow illicitly from or to users, is removed by: O.LS.CONFIDENTIALITY requiring the TOE to control information flow between entities and resources, based on the sensitivity labels of users and resources.
T.ACCESS.COMPENV	The threat of utilizing or modifying the runtime environment of compartments executing on behalf of other users is removed by: O.COMP.RESOURCE_ACCESS requiring the TOE to control access of compartments to objects and resources under its control. O.COMP.IDENT requiring the TOE to identify the compartment requesting to access resources, objects or information for each access request.
T.INFOFLOW.COMP	 The threat of accessing information without authorization by the information flow control policy is removed by: O.COMP.INFO_FLOW_CTRL requiring the TOE to control information flow between compartments under the control of the TOE based on security attributes of these compartments and potentially other TSF data. O.COMP.IDENT requiring the TOE to identify the compartment requesting to access resources, objects or information for each access request.
T.COMM.COMP	The threat of accessing the data communicated between compartments or between a compartment and an external entity is removed by: O.COMP.RESOURCE_ACCESS requiring the TOE to control access of compartments to objects and resources under its control, O.COMP.IDENT requiring the TOE to identify the compartment requesting to access resources, objects or information for each access request.

Table 3: Sufficiency of objectives countering threats

Version: 1.1 Classification: Public Page 34 of 114 Last update: 2013-01-18

The following rationale provides justification that the security objectives for the environment are suitable to cover each individual assumption, that each security objective for the environment that traces back to an assumption about the environment of use of the TOE, when achieved, actually contributes to the environment achieving consistency with the assumption, and that if all security objectives for the environment that trace back to an assumption are achieved, the intended usage is supported:

Assumption	Rationale for security objectives
A.PHYSICAL	The assumption on the IT environment to provide the TOE with appropriate physical security, commensurate with the value of the IT assets protected by the TOE is covered by: OE.INFO_PROTECT requiring the approval of network and peripheral cabling,
	OE.PHYSICAL requiring physical protection.
A.MANAGE	The assumptions on the TOE security functionality being managed by one or more trustworthy individuals is covered by: OE.ADMIN requiring trustworthy personnel managing the TOE, OE.INFO_PROTECT requiring personnel to ensure that
	 information is protected in an appropriate manner, OE.INSTALL requiring personnel to ensure that components that comprise the system are distributed, installed and configured in a secure manner supporting the security mechanisms provided by the TOE,
	 OE.RECOVER requiring personnel to assure that after system failure or other discontinuity, recovery without a protection (security) compromise is achieved.
A.AUTHUSER	The assumption on authorized users to possess the necessary authorization to access at least some of the information managed by the TOE and to act in a cooperating manner in a benign environment is covered by:
	 OE.ADMIN ensuring that those responsible for the TOE are competent and trustworthy individuals, capable of managing the TOE and the security of the information it contains, OE.INFO_PROTECT requiring that DAC protections on security-relevant files (such as audit trails and authentication databases) shall always be set up correctly and that users are authorized to access parts of the data maintained by the TOE.
A.TRAINEDUSER	The assumptions on users to be sufficiently trained and trusted to accomplish some task or group of tasks within a secure IT environment by exercising complete control over their user data is covered by: OE.ADMIN requiring competent personnel managing the TOE, OE.INFO_PROTECT requiring that those responsible for the TOE must establish and implement procedures to ensure that information is protected in an appropriate manner and that users are trained to exercise control over their own data.

Version: 1.1 Classification: Public Page 35 of 114 Last update: 2013-01-18

Assumption	Rationale for security objectives
A.DETECT	The assumption that modification or corruption of security-enforcing or security-relevant files will be detected by an administrative user is covered by:
	OE.INSTALL requiring an administrative user to ensure that the TOE is distributed, installed and configured in a secure manner supporting the security mechanisms provided by the TOE,
	 OE.MAINTENANCE requiring an administrative user to ensure that the diagnostics facilities are invoked at every scheduled preventative maintenance period, verifying the correct operation of the TOE,
	OE.RECOVER requiring an administrative user to ensure that procedures and/or mechanisms are provided to assure that after system failure or other discontinuity, recovery without a protection (security) compromise is achieved.
A.PEER.MGT	The assumption on all remote trusted IT systems to be under the same management control and operate under security policy constraints compatible with those of the TOE is covered by:
	 OE.TRUSTED.IT.SYSTEM requiring that these remote trusted IT systems are under the same management domain as the TOE, and are managed based on the same rules and policies applicable to the TOE.
A.PEER.FUNC	The assumption on all remote trusted IT systems to correctly implement the functionality used by the TSF consistent with the assumptions defined for this functionality is covered by:
	OE.TRUSTED.IT.SYSTEM requiring that the remote trusted IT systems implement the protocols and mechanisms required by the TSF to support the enforcement of the security policy.
A.CONNECT	The assumption on all connections to and from remote trusted IT systems and between physically separate parts of the TSF not protected by the TSF itself are physically or logically protected is covered by:
	 OE.REMOTE requiring that remote trusted IT systems provide the functions required by the TOE and are sufficiently protected from any attack that may cause those functions to provide false results,
	OE.TRUSTED.IT.SYSTEM demanding the physical and logical protection equivalent to the TOE.

Table 4: Sufficiency of objectives holding assumptions

The following rationale provides justification that the security objectives are suitable to cover each individual organizational security policy, that each security objective that traces back to an OSP, when achieved, actually contributes to the implementation of the OSP, and that if all security objectives that trace back to an OSP are achieved, the OSP is implemented:

Version: 1.1 Classification: Public Page 36 of 114 Last update: 2013-01-18

OSP	Rationale for security objectives
P.ACCOUNTABILITY	The policy to hold users accountable for their security-relevant actions within the TOE is implemented by: O.AUDITING providing the TOE with audit functionality,
	O.MANAGE allowing the management of this function.
P.USER	The policy to match the trust given to a user and the actions the user is given authority to perform is implemented by:
	 O.MANAGE allowing appropriately-authorized users to manage the TSF,
	OE.INFO_PROTECT, which requires that users are trusted to use the protection mechanisms of the TOE to protect their data.
P.CLEARANCE	The policy to limit information flow between protected resources and authorized users based on whether the user's sensitivity label is appropriate for the labeled information is implemented by:
	 O.LS.CONFIDENTIALITY requiring the TOE to control information flow between entities and resources based on the sensitivity labels of users and resources.
P.LABELED_OUTPUT	The policy to provide the capability to mark printed output with accurate labels based on the sensitivity label of the user causing the output is implemented by:
	 O.LS.PRINT providing the capability to mark printed output with accurate labels based on the sensitivity label of the user causing the output.
P.RESOURCE_LABELS	The policy that resources accessible by subjects and all subjects must have associated labels identifying the sensitivity levels of data contained therein is implemented by:
	 O.LS.LABEL providing the capability to label all subjects and all objects accessible by subjects, to restrict the information flow based on the sensitivity labels.
P.USER_CLEARANCE	The policy that all users must have a clearance level identifying the maximum sensitivity levels of data they may access is implemented by:
	 O.LS.CONFIDENTIALITY requiring the TOE to control information flow between entities and resources based on the sensitivity labels of users and resources.
	 O.LS.LABEL ensuring that objects and subjects can be labeled such that the TOE can restrict information flow based on those labels.

Table 5: Sufficiency of objectives enforcing Organizational Security Policies

Version: 1.1 Classification: Public Page 37 of 114 Last update: 2013-01-18

5 Extended Components Definition

[OSPP] defines following extended components:

- FDP RIP.3: Full residual information protection of subjects, and
- FIA USB.2: Enhanced user-subject binding.

This security target does not define any additional extended components.

The definition of FCS RNG was supplied by BSI. Due to the changes to FCS RNG.1 requested by BSI, the SFR of FCS RNG.1 referenced in the OSPP needed to be updated as follows.

5.1 Class FCS: Cryptographic support

5.1.1 Random number generator (RNG)

Family behaviour

This family defines quality requirements for the generation of random numbers that are intended to be used for cryptographic purposes.

Component levelling

FCS RNG.1 is not hierarchical to any other component within the FCS RNG family.

Management: FCS RNG.1

The following actions could be considered for the management functions in FMT:

There are no management activities foreseen.

Audit: FCS RNG.1

The following actions should be auditable if FAU GEN Security audit data generation is included in the PP/ST:

- a) Minimal: There are no actions defined to be auditable.
- Basic: There are no actions defined to be auditable. b)
- Detailed: There are no actions defined to be auditable.

5.1.1.1 FCS RNG.1 - Random number generation

Hierarchical to: No other components. Dependencies: No dependencies.

FCS_RNG.1.1 The TSF shall provide a deterministic random number generator that implements:

- DRG.2.1: If initialized with a random seed [selection: using PTRNG of class PTG.2 as random source, using PTRNG of class PTG.3 as random source, using NPTRNG of class NTG.1 as random source, [assignment: other requirements for seeding]], the internal state of the RNG shall [selection: have [assignment: amount of entropy], have [assignment: work factor], require [assignment: guess work]].
- DRG.2.2: The RNG provides forward secrecy.

Version: 1.1 Classification: Public Page 38 of 114 Last update: 2013-01-18

DRG.2.3: The RNG provides backward secrecy.

FCS_RNG.1.2 The TSF shall provide random numbers that meet:

- **DRG.2.4:** The RNG initialized with a random seed [assignment: requirements for seeding] generates output for which [assignment: number of strings] strings of bit length 128 are mutually different with probability [assignment: probability].
- DRG.2.5: Statistical test suites cannot practically distinguish the random numbers from output sequences of an ideal RNG. The random numbers must pass test procedure A [assignment: additional test suites].

Rationale

The quality of the random number generator is defined using this SFR. The quality metric required in FCS RNG.1.2 is detailed in the German Scheme AIS 20 and AIS 31 and amended based on discussions with BSI.

Version: 1.1 Classification: Public Page 39 of 114 Last update: 2013-01-18

6 Security Requirements

6.1 TOE Security Functional Requirements

The following table shows the Security functional requirements for the TOE, and the operations performed on the components according to CC part 2: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security functional group	Security functional requirement		Source	Operations				
		security functional component		Iter.	Ref.	Ass.	Sel.	
FAU - Security audit	FAU_GEN.1 Audit data generation		OSPP	No	No	Yes	No	
addit	FAU_GEN.2 User identity association		OSPP	No	No	No	No	
	FAU_SAR.1 Audit review		OSPP	No	No	Yes	No	
	FAU_SAR.2 Restricted audit review		OSPP	No	No	No	No	
	FAU_SAR.3 Selectable audit review		CC Part 2	No	No	Yes	No	
	FAU_SEL.1 Selective audit		OSPP	No	No	Yes	No	
	FAU_STG.1 Protected audit trail storage		OSPP	No	No	No	Yes	
	FAU_STG.3 Action in case of possible audit data loss		OSPP	No	No	Yes	No	
	FAU_STG.4 Prevention of audit data loss		OSPP	No	No	Yes	Yes	
FCS - Cryptographic support	FCS_CKM.1(SYM) Cryptographic key generation	FCS_CKM.1	OSPP	Yes	No	Yes	No	
	FCS_CKM.1(RSA) Cryptographic key generation	FCS_CKM.1	OSPP	Yes	No	Yes	No	
	FCS_CKM.1(DSA) Cryptographic key generation	FCS_CKM.1	OSPP	Yes	No	Yes	Yes	
	FCS_CKM.2(NET) Cryptographic key distribution	FCS_CKM.2	OSPP	No	No	Yes	Yes	
	FCS_CKM.4 Cryptographic key destruction		OSPP	No	No	No	Yes	
	FCS_COP.1(NET) Cryptographic operation	FCS_COP.1	OSPP	No	No	Yes	Yes	
	FCS_RNG.1 Random number generator (Class DRG.2)		ECD	No	No	Yes	Yes	

Page 40 of 114 Version: 1.1 Classification: Public Last update: 2013-01-18

Page 41 of 114

Security Security functional requirement group	Security functional requirement	Base security	Source	Operations				
	functional component		Iter.	Ref.	Ass.	Sel.		
FDP - User data protection	FDP_ACC.2(RACF-PSO) RACF Persistent Storage Object Access Control Policy	FDP_ACC.2	OSPP	Yes	Yes	Yes	No	
	FDP_ACC.2(RACF-TSO) RACF Transient Storage Object Access Control Policy	FDP_ACC.2	OSPP	Yes	Yes	Yes	No	
	FDP_ACC.2(RACF-SYSTEM) RACF System Object Access Control Policy	FDP_ACC.2	CC Part 2	Yes	No	Yes	No	
	FDP_ACC.2(CP) Discretionary Access Control Policy by CP	FDP_ACC.2	CC Part 2	Yes	No	Yes	No	
	FDP_ACF.1(RACF) Access Control Functions by RACF	FDP_ACF.1	OSPP	Yes	Yes	Yes	No	
	FDP_ACF.1(CP) Discretionary Access Control Functions by CP	FDP_ACF.1	CC Part 2	Yes	No	Yes	No	
	FDP_ETC.2(LS) (Labeled Security Mode only) Export of user data with security attributes	FDP_ETC.2	OSPP-LS	Yes	Yes	Yes	No	
	FDP_ETC.2(VIRT) Export of user data with security attributes	FDP_ETC.2	OSPP-VIRT	Yes	Yes	Yes	No	
	FDP_IFC.2(NI) Complete information flow control	FDP_IFC.2	OSPP	Yes	No	Yes	No	
	FDP_IFC.2(LS) (Labeled Security Mode only) Complete information flow control	FDP_IFC.2	OSPP-LS	Yes	Yes	Yes	No	
	FDP_IFC.2(VIRT) Complete information flow control	FDP_IFC.2	OSPP-VIRT	Yes	No	Yes	No	
	FDP_IFF.1(NI) Simple security attributes	FDP_IFF.1	OSPP	Yes	No	Yes	Yes	
	FDP_IFF.1(VIRT) Simple security attributes	FDP_IFF.1	OSPP-VIRT	Yes	Yes	Yes	No	
	FDP_IFF.2(LS) (Labeled Security Mode only) Hierarchical security attributes	FDP_IFF.2	OSPP-LS	No	Yes	Yes	No	
	FDP_ITC.1(LS) (Labeled Security Mode only) Import of user data without security attributes	FDP_ITC.1	OSPP-LS	No	Yes	Yes	No	
	FDP_ITC.2(BA) Import of user data with security attributes	FDP_ITC.2	OSPP	Yes	Yes	Yes	No	

Version: 1.1 Classification: Public Last update: 2013-01-18

Security functional	Security functional requirement		Source		Opera	ations	
group		security functional component		Iter.	Ref.	Ass.	Sel.
	FDP_ITC.2(LS) (Labeled Security Mode only) Import of user data with security attributes: labeled security	FDP_ITC.2	OSPP-LS	Yes	Yes	Yes	No
	FDP_ITC.2(VIRT) Import of user data with security attributes	FDP_ITC.2	OSPP-VIRT	Yes	Yes	Yes	No
	FDP_RIP.2 Full residual information protection		OSPP	No	No	No	Yes
	FDP_RIP.3 Full residual information protection of resources		OSPP	No	No	No	Yes
FIA - Identification and	FIA_AFL.1 Authentication failure handling		OSPP	No	No	Yes	Yes
authentication	FIA_ATD.1(HU) User attribute definition	FIA_ATD.1	OSPP	Yes	No	Yes	No
	FIA_ATD.1(TU) User attribute definition	FIA_ATD.1	OSPP	Yes	No	Yes	No
	FIA_ATD.1(LS) User attribute definition: labeled security	FIA_ATD.1	OSPP-LS	Yes	Yes	No	No
	FIA_SOS.1 Verification of secrets		OSPP	No	No	No	No
	FIA_UAU.1 Timing of authentication		OSPP	No	No	Yes	No
	FIA_UAU.5 Multiple authentication mechanisms		OSPP	No	Yes	Yes	No
	FIA_UAU.7 Protected authentication feedback		OSPP	No	No	No	No
	FIA_UID.1 Timing of identification		OSPP	No	No	Yes	No
	FIA_UID.2(VIRT) User identification before any action	FIA_UID.2	OSPP-VIRT	No	No	No	No
	FIA_USB.1(LS) (Labeled Security Mode only) User-subject binding	FIA_USB.1	OSPP-LS	No	Yes	Yes	No
	FIA_USB.2 Enhanced user-subject binding		OSPP	No	Yes	Yes	No
FMT - Security management	FMT_MSA.1(DAC) Management of object security attributes	FMT_MSA.1	OSPP	Yes	Yes	Yes	Yes
	FMT_MSA.1(LS) (Labeled Security Mode only) Management of object security attributes: labeled security	FMT_MSA.1	OSPP-LS	Yes	Yes	Yes	No

Version: 1.1 Classification: Public Page 42 of 114 Last update: 2013-01-18

Security	Security functional requirement	Base security functional component	Source	Operation			ns	
functional group				Iter.	Ref.	Ass.	Sel.	
	FMT_MSA.1(VIRT-CIFCP) Management of security attributes	FMT_MSA.1	OSPP-VIRT	Yes	No	Yes	Yes	
	FMT_MSA.3(DAC) Static attribute initialisation	FMT_MSA.3	OSPP	Yes	Yes	Yes	No	
	FMT_MSA.3(NI) Static attribute initialisation	FMT_MSA.3	OSPP	Yes	No	Yes	Yes	
	FMT_MSA.3(LS) (Labeled Security Mode only) Static attribute initialization: labeled security	FMT_MSA.3	OSPP-LS	Yes	Yes	Yes	No	
	FMT_MSA.3(VIRT-CIFCP) Static attribute initialisation	FMT_MSA.3	OSPP-VIRT	Yes	No	Yes	No	
	FMT_MSA.4(DAC) Security attribute value inheritance	FMT_MSA.4	OSPP	No	No	Yes	No	
	FMT_MTD.1(AE) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	No	
	FMT_MTD.1(AS) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	Yes	
	FMT_MTD.1(AT) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	Yes	
	FMT_MTD.1(AF) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	Yes	
	FMT_MTD.1(NI) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	Yes	
	FMT_MTD.1(IAT) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	No	
	FMT_MTD.1(IAF) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	No	
	FMT_MTD.1(IAU) Management of TSF data	FMT_MTD.1	OSPP	Yes	No	Yes	No	
	FMT_MTD.1(VIRT-COMP) Management of TSF data	FMT_MTD.1	OSPP-VIRT	Yes	No	Yes	No	
	FMT_REV.1(OBJ) Revocation of Object Attributes	FMT_REV.1	OSPP	Yes	No	Yes	No	
	FMT_REV.1(USR) Revocation of User Attributes	FMT_REV.1	OSPP	Yes	No	Yes	No	

Version: 1.1 Classification: Public Page 43 of 114 Last update: 2013-01-18

Security functional	Security functional requirement		Source		Operations			
group		security functional component		Iter.	Ref.	Ass.	Sel.	
	FMT_SMF.1 Specification of management functions		OSPP	No	Yes	Yes	No	
	FMT_SMR.1 Security roles		OSPP	No	No	Yes	No	
FPT - Protection of the TSF	FPT_STM.1 Reliable time stamps		OSPP	No	No	No	No	
the 13r	FPT_TDC.1(BA) Inter-TSF basic TSF data consistency	FPT_TDC.1	OSPP	Yes	No	Yes	No	
	FPT_TDC.1(LS) (Labeled Security Mode only) Inter-TSF basic TSF data consistency: labeled security	FPT_TDC.1	OSPP-LS	Yes	No	Yes	No	
	FPT_TDC.1(VIRT) Inter-TSF basic TSF data consistency: virtualization	FPT_TDC.1	OSPP-VIRT	Yes	No	Yes	No	
FTA - TOE access	FTA_SSL.1 TSF-initiated session locking		OSPP	No	No	Yes	No	
	FTA_SSL.2 User-initiated locking		OSPP	No	No	Yes	No	
FTP - Trusted path/channels	FTP_ITC.1 Inter-TSF trusted channel		OSPP	No	Yes	Yes	Yes	

Table 6: Security functional requirements for the TOE

6.1.1 Security audit (FAU)

6.1.1.1 Audit data generation (FAU_GEN.1)

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shutdown of the audit functions;
- b) All auditable events for the basic level of audit; and
- c) all modifications to the set of events being audited;
- d) all user authentication attempts;
- e) all denied accesses to objects for which the access control policy defined in the OSPP base applies;
- f) explicit modifications of access rights to objects covered by the access control policies; and
- g) no other events.

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity (if applicable), and outcome of the event; and
- For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST;

Version: 1.1 Classification: Public Page 44 of 114

- i. User identity (if applicable); and
- (in Labeled Security Mode) The sensitivity labels of ii. subjects, objects, or information involved.

6.1.1.2 User identity association (FAU GEN.2)

FAU GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

Application note: There are some auditable events which may not be associated with a user, such as failed login attempts. It is acceptable that such events do not include a user identity. In the case of failed login attempts it is also acceptable not to record the attempted identity in cases where that attempted identity could be misdirected authentication data; for example when the user may have been out of sync and typed a password in place of a user identifier.

6.1.1.3 Audit review (FAU SAR.1)

- FAU SAR.1.1 The TSF shall provide RACF auditors with the capability to read all audit **information** from the audit records.
- The TSF shall provide the audit records in a manner suitable for the user to FAU_SAR.1.2 interpret the information.

6.1.1.4 Restricted audit review (FAU SAR.2)

FAU SAR.2.1 The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.

6.1.1.5 Selectable audit review (FAU SAR.3)

- FAU SAR.3.1 The TSF shall provide the ability to apply searches of audit data based on the following attributes:
 - a) user identity;
 - b) subject sensitivity label; (Labeled Security Mode only)
 - c) object sensitivity label; (Labeled Security Mode only)
 - d) object type and object name

6.1.1.6 Selective audit (FAU SEL.1)

- FAU SEL.1.1 The TSF shall be able to select the set of events to be audited from the set of all auditable events based on the following attributes:
 - a) Type of audit event;
 - b) Subject or user identity;
 - Outcome (success or failure) of the audit event;
 - d) Named object identity;
 - subject sensitivity label (Labeled Security Mode only); e)
 - object sensitivity label (Labeled Security Mode only) f)

Version: 1.1 Classification: Public Page 45 of 114 Last update: 2013-01-18

6.1.1.7 Protected audit trail storage (FAU_STG.1)

- **FAU_STG.1.1** The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.
- **FAU_STG.1.2** The TSF shall be able to **prevent** unauthorised modifications to the audit records in the audit trail.

6.1.1.8 Action in case of possible audit data loss (FAU STG.3)

FAU_STG.3.1 The TSF shall **generate an alarm to selected RACF auditors** if the audit trail exceeds **the capacity of the SMF disks** or if any of the following **no other** is detected that may result in a loss of audit records.

6.1.1.9 Prevention of audit data loss (FAU_STG.4)

FAU_STG.4.1 The TSF shall **prevent audited events, except those taken by the authorised administrator** and **inform the RACF auditor** if the audit trail is full.

6.1.2 Cryptographic support (FCS)

6.1.2.1 Cryptographic key generation (FCS_CKM.1(SYM))

- **FCS_CKM.1.1** The TSF shall generate symmetric cryptographic keys in accordance with a specified cryptographic key generation algorithm capable of generating a random bit sequence and specified cryptographic key sizes:
 - a) 128 bits,
 - b) 168 bits,
 - c) 256 bits,
 - d) no other cryptographic key sizes

that meet the following: TLS/SSL: generation and exchange of session keys as defined in the [SSLv3], [TLSv1], and [TLSv1.1] standards with the cipher suites defined in FCS_COP.1(NET).

6.1.2.2 Cryptographic key generation (FCS_CKM.1(RSA))

- **FCS_CKM.1.1** The TSF shall generate RSA cryptographic keys in accordance with a specified cryptographic key generation algorithm defined in U.S. NIST FIPS PUB 186-3 appendix B.3 and specified cryptographic key sizes:
 - a) 2048 bits,
 - b) no other cryptographic key sizes

that meet the following:

Last update: 2013-01-18

- a) U.S. NIST FIPS PUB 186-3,
- b) no other standards.

Version: 1.1 Classification: Public Page 46 of 114

6.1.2.3 Cryptographic key generation (FCS CKM.1(DSA))

- FCS CKM.1.1 The TSF shall generate DSA cryptographic keys in accordance with a specified cryptographic key generation algorithm defined in U.S. NIST FIPS PUB 186-3 appendix B.1 and specified cryptographic key sizes:
 - a) L=1024, N=160 bits;

that meet the following:

- U.S. NIST FIPS PUB 186-3,
- no other standards.

6.1.2.4 Cryptographic key distribution (FCS CKM.2(NET))

- FCS CKM.2.1 The TSF shall distribute cryptographic keys in accordance with the following specified cryptographic key distribution method that meets the following:
 - RSA encrypted exchange of pre-master secrets defined for the TLS protocol by [SSLv3], [TLSv1.1], [TLSv1].

6.1.2.5 Cryptographic key destruction (FCS CKM.4)

FCS CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method of **zeroization** that meets the following: vendor-specific zeroization.

6.1.2.6 Cryptographic operation (FCS COP.1(NET))

- FCS COP.1.1 The TSF shall perform encryption, decryption, integrity verification, peer authentication in accordance with the following cryptographic algorithms, cryptographic key sizes that meet the following and applicable standards:
 - TLS allowing the use of TDES in CBC mode with 168 bits key size, and SHA-1 defined by [TLSv1.1];
 - TLS allowing the use of AES in CBC mode with 128 bits and 256 bits key size, and SHA-1 defined by [TLSv1.1];
 - TLS allowing the use of TDES in CBC mode with 168 bits key size, c) and SHA-1 defined by [TLSv1];
 - TLS allowing the use of AES in CBC mode with 128 bits and 256 bits key size, and SHA-1 defined by [TLSv1];
 - TLS allowing the use of TDES in CBC mode with 168 bits key size, and SHA-1 defined by [SSLv3];
 - f) TLS allowing the use of AES in CBC mode with 128 bits and 256 bits key size, and SHA-1 defined by [SSLv3].

6.1.2.7 Random number generator (Class DRG.2) (FCS RNG.1)

- FCS RNG.1.1 The TSF shall provide a deterministic random number generator that implements:
 - DRG.2.1: If initialized with a random seed using CPU iitter as seed source, the internal state of the RNG shall have a minimum entropy of 48 bits.
 - DRG.2.2: The RNG provides forward secrecy. b)

Version: 1.1 Classification: Public Page 47 of 114 Last update: 2013-01-18

- c) DRG.2.3: The RNG provides backward secrecy.
- FCS_RNG.1.2 The TSF shall provide random numbers that meet
 - a) DRG.2.4: The RNG initialized with a random seed **holding 96 bits of entropy** generates output for which **2**25** strings of bit length 128 are mutually different with probability **of greater than 1-2**-10**.
 - b) DRG.2.5: Statistical test suites cannot practically distinguish the random numbers from output sequences of an ideal RNG. The random numbers must pass test procedure A.

Application note: Quote from the FIPS 140-2 security policy covering the DRNG seeding: "... the DRNG engine seeded with 20 bytes of true random data. This true random number generator extracts entropy from time measurement jitter (minute variations of clock edges). The internal TRNG engine feeds entropy on demand into the DRNG; the TRNG itself maintains a running pool of samples, and provides seed if the pool passes basic entropy content checks."

6.1.3 User data protection (FDP)

6.1.3.1 RACF Persistent Storage Object Access Control Policy (FDP_ACC.2(RACF-PSO))

- **FDP_ACC.2.1** The TSF shall enforce the *RACF* Persistent Storage Object Access Control Policy on
 - a) Subjects: virtual machines acting on behalf of a human user or technical entity providing a virtual machine environment;
 - b) Objects:

Last update: 2013-01-18

- i. Persistent Storage Objects of the following type
 - Minidisks
 - Real DASD volumes
 - Restricted DCSS
 - Restricted NSS
 - Spool files
 - POSIX information database
 - RACF database
- ii. no other storage objects

and all operations among subjects and objects covered by the SFP.

FDP_ACC.2.2 The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

Application Note: This SFR is hierarchical to the PP SFR of FDP_ACC.1(PSO) which satisfies the strict conformance claim.

Application Note: The TOE provides virtual machines for other operating systems as well as other components of the TOE. The objects maintained by the TOE are therefore accessible by virtual machines hosting operating systems as well as virtual machines implementing other aspects of the TOE. Therefore, the ST author decided to merge the SFR FDP_ACC.2(VIRT) defined by the OSPP extended package on virtualization into the access control SFRs specified by the OSPP base. To

Version: 1.1 Classification: Public Page 48 of 114

still satisfy the strict compliance with the PP, the ST author uses the hierarchical SFR of FDP ACC.2 to implement the OSPP-base access control policies as well as the virtualization access control policy.

This SFR defines the Persistent Storage Objects covering the SFR of FDP ACC.2(VIRT) required by the PP. The defined subjects are the compartments defined with the PP SFR. Together with FDP ACC.2(RACF-PSO) defined below, the PP SFR FDP ACC.2(VIRT) is also covered, satisfying the strict compliance.

6.1.3.2 RACF Transient Storage Object Access Control Policy (FDP ACC.2(RACF-TSO))

- FDP_ACC.2.1 The TSF shall enforce the RACF Transient Storage Object Access Control Policy
 - Subjects: virtual machines acting on behalf of a human user or a) technical entity providing a virtual machine environment;
 - b) Objects:
 - i. Transient Storage Objects of the following type
 - **Guest LANs**
 - **Virtual Switches**
 - NJE network nodes
 - Virtual point-to-point communication paths (IUCV, VMCF, APPC, virtual CTC, MSG, WNG, MSGNOH, SMSG)
 - **CP** real memory
 - no other storage objects

and all operations among subjects and objects covered by the SFP.

FDP ACC.2.2 The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

Application Note: This SFR is hierarchical to the PP SFR of FDP ACC.1(TSO) which satisfies the strict conformance claim.

Application Note: The TOE provides virtual machines for other operating systems as well as other components of the TOE. The objects maintained by the TOE are therefore accessible by virtual machines hosting operating systems as well as virtual machines implementing other aspects of the TOE. Therefore, the ST author decided to merge the SFR FDP ACC.2(VIRT) defined by the OSPP extended package on virtualization into the access control SFRs specified by the OSPP base. To still satisfy the strict compliance with the PP, the ST author uses the hierarchical SFR of FDP ACC.2 to implement the OSPP-base access control policies as well as the virtualization access control policy.

This SFR defines the Transient Storage Objects covering the SFR of FDP ACC.2(VIRT) required by the PP. The defined subjects are the compartments defined with the PP SFR. Together with FDP ACC.2(RACF-TSO) defined below, the PP SFR FDP ACC.2(VIRT) is also covered, satisfying the strict compliance.

Version: 1.1 Classification: Public Page 49 of 114 Last update: 2013-01-18

6.1.3.3 RACF System Object Access Control Policy (FDP ACC.2(RACF-SYSTEM))

- FDP ACC.2.1 The TSF shall enforce the RACF System Object Access Control Policy on
 - Subjects: virtual machines acting on behalf of a human user or technical entity providing a virtual machine environment;
 - b) Obiects:
 - i. User authentication service
 - ii. **RACROUTE** macro
 - iii. Alternate (surrogate) user IDs
 - iv. Virtual machine console
 - **System access**
 - vi. Objects accessible through the following interfaces:
 - **CP** commands listed in table 4, Appendix A [SCG]
 - DIAGNOSE codes listed in table 5, Appendix A [SCG]
 - iii. System functions listed in table 6, Appendix A [SCG]

and all operations among subjects and objects covered by the SFP.

FDP ACC.2.2 The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

6.1.3.4 Discretionary Access Control Policy by CP (FDP ACC.2(CP))

- FDP ACC.2.1 The TSF shall enforce the CP Access Control Policy on
 - Subjects: virtual machines acting on behalf of a human user or technical entity providing a virtual machine environment;
 - b) **Objects:**
 - CP commands belonging to one or more privilege classes other than privilege class ANY
 - **DIAGNOSE** code belonging to one or more privilege classes other than privilege class ANY or whose can be access restricted with a system directory statement
 - iii. Following processor instruction causing the SIE instruction to terminate:
 - **IUCV** processor instruction (0xB2F0)

and all operations among subjects and objects covered by the SFP.

FDP ACC.2.2 The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

Version: 1.1 Classification: Public Page 50 of 114 Last update: 2013-01-18

6.1.3.5 Access Control Functions by RACF (FDP ACF.1(RACF))

- FDP ACF.1.1 The TSF shall enforce the RACF Persistent Storage Object Access Control Policy , RACF Transient Storage Object Access Control Policy, RACF System Object Access Control Policy to objects based on the following:
 - a) The user identity and group membership(s) associated with a subject; and
 - b) The following access control attributes associated with an object:
 - an access control list capable of defining the access rights read, update, execute, alter, control, and none for individual users and groups
 - a default access right (defined by the UACC attribute in the resource profile) for users who are not addressed in the access control list.
- FDP ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:
 - if the requested type of access is allowed by an access control list (ACL) for this particular compartment or, if a) is not true,
 - b) if the requested type of access is allowed by an access authority for group the compartment belongs to. If list-of-groups processing is not in effect, this rule is evaluated only for the current connect group. Otherwise this rule is evaluated for all groups the compartment is connected to or, if none of the above is true,
 - c) if the requested type of access is granted by the universal access authority (UACC) in the profile protecting the resource.
- FDP ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules:
 - a) Assignment of the OPERATIONS attribute to users or groups allow access to any resource in a class defined in the Class **Descriptor Table with OPER=YES (assigning attributes to groups** provide the user with the same set of rights restricted to the scope of the group)
 - b) By adding resource profiles to the global access table with a **UACC** other than NONE, this resource is always allowed access with the access level specified by the UACC.

Application note: Other attributes, such as the SPECIAL, AUDITOR, or CLAUTH attributes, or the group authority of CONNECT/JOIN allow accessing the resource profile only. Only when changing these profiles to allow the user bearing these attributes access to the resource, access is granted. Therefore, these attributes do not overwrite the DAC policy specified here.

- FDP ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules:
 - a) Assignment of the REVOKE attribute to users
 - b) By adding resource profiles to the global access table with a **UACC** of NONE, this resource is always denied access to.

Version: 1.1 Classification: Public Page 51 of 114 Last update: 2013-01-18

Application Note: The OSPP base specifies FDP_ACF.1(PSO) and FDP_ACF.1(TSO). As this TOE implements one rule set for both object types, the ST author choose to define one instance of FDP ACF.1 covering both. As outlined in this SFR, it applies to both, PSO and TSO. It would always be possible to specify separate FDP ACF.1 iterations individually for TSO and PSO, but they would specify identical rule sets. Therefore, the ST is still considered to be strictly conformant to the OSPP.

Application Note: As outlined for FDP ACC.2(RACF-PSO) and FDP ACC.2(RACF-TSO), both policies also cover all subjects and objects required by FDP ACC.2(VIRT) out of the OSPP extended package of virtualization. Therefore, this SFR also covers FDP ACF.1(VIRT), satisfying the strict compliance of this ST with the PP.

Application Note: FDP ACC.2(RACF-PSO), FDP ACC.2(RACF-TSO), and FDP ACC.2(RACF-SYSTEM) apply to FDP ACF.1(RACF) which is implemented by the trusted application of RACF.

6.1.3.6 Discretionary Access Control Functions by CP (FDP ACF.1(CP))

- FDP ACF.1.1 The TSF shall enforce the **CP Access Control Policy** to objects based on the following:
 - a) The user identity associated with a subject; and
 - b) The following access control attributes associated with an object:
 - a privilege class.

Application note: The membership of the user to groups defined in RACF is not applicable as the access control mechanism only uses the user ID for access validation.

- FDP ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: if the user belongs to the same privilege class the CP command, DIAGNOSE code, or protected processor instruction is assigned to.
- FDP ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **none**.
- FDP ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **none**.

Application note: FDP ACC.2(CP) applies to FDP ACF.1(CP) and is implemented by the TOE kernel (Control Program).

Application note: Both DAC mechanism implemented in RACF and CP are partially enforced on identical objects: the CP commands and DIAGNOSE codes listed in FDP ACC.2(RACF-SYSTEM). The access check on those objects is sequential: first the CP check is being performed and RACF authorizes second. In case the CP check denies access, no further RACF check is performed. In contrast, if the CP check accepts the request from the user, RACF performs its access check. Only if both access checks succeed, the request is being allowed to proceed.

Application note: The REVOKE attribute prevents a user from logging into the system.

6.1.3.7 Export of user data with security attributes (FDP ETC.2(LS) (Labeled Security Mode only))

FDP ETC.2.1 The TSF shall enforce the Mandatory Access Control Policy Multilevel Confidentiality Information Flow Control Policy when exporting user data, controlled under the MAC-policySFP(s), outside of the TOE.

Version: 1.1 Classification: Public Page 52 of 114 Last update: 2013-01-18

- FDP ETC.2.2 The TSF shall export the user data with the user data's associated security attributes.
- FDP ETC.2.3 The TSF shall ensure that the security attributes, when exported outside the TOE, are unambiguously associated with the exported user data.
- FDP ETC.2.4 The TSF shall enforce the following rules when user data is exported from the TOE:
 - When data is exported in hardcopy form, each page shall be marked with a) a printed representation of the sensitivity label of the subject requesting the export of the page. By default, this marking shall appear on both the top and bottom of each printed page.
 - When the data is exported to a *printer* device the security attributes shall be exported with the data using the association of a printer to a single sensitivity label that can only be changed by the authorized administrator.
 - Devices used to export data with security attributes cannot be c) used to export data without security attributes unless the change in device state is performed manually and is auditable.
 - Devices used to export data with security attributes shall completely and unambiguously associate the security attributes with the corresponding data.

6.1.3.8 Export of user data with security attributes (FDP ETC.2(VIRT))

- FDP ETC.2.1 The TSF shall enforce the Compartment Access Control PolicyRACF Persistent Storage Object Access Control Policy, RACF Transient Storage Object Access Control Policy, and Compartment Information Flow Control Policy when exporting user data, controlled under the SFP(s), outside of the TOE.
- FDP ETC.2.2 The TSF shall export the user data with the user data's associated security attributes.
- FDP ETC.2.3 The TSF shall ensure that the security attributes, when exported outside the TOE, are unambiguously associated with the exported user data.
- FDP ETC.2.4 The TSF shall enforce the following rules when user data is exported from the TOE: The host system ensures that the source IP-address is equal to the IP-address assigned to the virtual machine initiating the data export using the network.

6.1.3.9 Complete information flow control (FDP IFC.2(NI))

- FDP IFC.2.1 The TSF shall enforce the Network Information Flow Control Policy on
 - a) Subjects:
 - i. unauthenticated external IT entities that send and receive information mediated by the TOE;
 - **no other subjects** that send and receive information mediated by the TOE;
 - b) Information:
 - Network data routed through the TOE;
 - ii. no other information;

Classification: Public Version: 1.1 Page 53 of 114 Last update: 2013-01-18

and all operations that cause that information to flow to and from subjects covered by the SFP.

FDP IFC.2.2 The TSF shall ensure that all operations that cause any information in the TOE to flow to and from any subject in the TOE are covered by an information flow control SFP.

Application note: This requirement covers IPv4 and IPv6 traffic.

6.1.3.10 Complete information flow control (FDP IFC.2(LS) (Labeled **Security Mode only))**

- FDP_IFC.2.1 The TSF shall enforce the Mandatory Access Control Policy (MAC-policy) Multilevel Confidentiality Information Flow Control Policy on
 - Subjects: virtual machines acting on behalf of a human user or technical entity providing a virtual machine environment;
 - b) Objects:
 - **Minidisks**
 - **Real DASD volumes**
 - Restricted DCSS
 - Restricted NSS
 - Spool files
 - **Guest LANs**
 - **Virtual Switches**
 - NJE network nodes
 - **CP-controlled printers**
 - Virtual point-to-point communication paths (IUCV, VMCF, APPC, virtual CTC, MSG, WNG, MSGNOH, SMSG)
 - POSIX information database
 - User authentication service
 - **RACROUTE** macro
 - **CP** real memory
 - Alternate (surrogate) user IDs
 - **RACF** database
 - Virtual machine console
 - System access
 - Objects accessible through the following interfaces:
 - CP commands listed in table 4, Appendix A [SCG]
 - DIAGNOSE codes listed in table 5, Appendix A 0 [SCG]
 - System functions listed in table 6, Appendix A [SCG]

and all operations that cause that information to flow among them.

Version: 1.1 Classification: Public Page 54 of 114 Last update: 2013-01-18

FDP IFC.2.2 The TSF shall ensure that all operations that cause any information in the TOE to flow among untrusted subjects and named objects in the TOE are covered by the Mandatory Access Control Policy Multilevel Confidentiality Information Flow Control Policy.

6.1.3.11 Complete information flow control (FDP IFC.2(VIRT))

- FDP IFC.2.1 The TSF shall enforce the Compartment Information Flow Control Policy on
 - a) Subjects:
 - i. Compartments;
 - ii. External entities:
 - iii. No other entities:
 - Information: b)
 - i. User data belonging to compartments;
 - User data belonging to subjects outside of compartments; ii.

 - No additional information iv.

and all operations that cause that information to flow to and from subjects covered by the SFP.

Application Note: Compartments are the virtual machines mentioned in other SFRs.

FDP IFC.2.2 The TSF shall ensure that all operations that cause any information in the TOE to flow to and from any subject in the TOE are covered by an information flow control SFP.

6.1.3.12 Simple security attributes (FDP IFF.1(NI))

- FDP_IFF.1.1 The TSF shall enforce the Network Information Flow Control Policy based on the following types of subject and information security attributes:
 - Object security attribute: the logical or physical network interface through which the network data entered the TOE:
 - b) **IEEE 802.1Q VLAN tag information security attributes:**
 - i. VLAN tag.
- FDP IFF.1.2 The TSF shall permit an information flow between a controlled subject and controlled information via a controlled operation if the following rules hold: If the z/VM TCP/IP stack application configured for IP security allows an IP packet to be sent or to be received by a subject, the packet flow is allowed according to the protocol stack's behavior.
- FDP_IFF.1.3 The TSF shall enforce the following rules:

Identification of network data using one or more of the following concepts:

- Information security attribute matching;
- b) No other matching concepts;

Performing one or more of the following actions with identified network data:

Discard the network data without any further processing, with sending a notification to the sender;

Classification: Public Version: 1.1 Page 55 of 114 Last update: 2013-01-18

- b) Allow the network data to be processed unaltered by the TOE according to the routing information maintained by the TOE;
- c) no other actions.
- **FDP_IFF.1.4** The TSF shall explicitly authorise an information flow based on the following rules: **None**.
- The TSF shall explicitly deny an information flow based on the following rules: If the network data is not matched by the rule set, the TSF shall discard the data.

6.1.3.13 Simple security attributes (FDP IFF.1(VIRT))

- **FDP_IFF.1.1** The TSF shall enforce the Compartment Information Flow Control Policy based on the following types of subject and information security attributes:
 - a) Subject security attributes:
 - i. virtual machine ID;
 - ii. no additional subject security attributes;
 - b) Information security attributes:
 - i. virtual machine ID;
 - ii. No TSF data security attributes;
 - iii. No additional information security attributes.

Application Note: The virtual machine identifier is identical with the user ID. Hence, the virtual machine ID is used as a synonym to the user ID and managed identically by the TOE.

- The TSF shall permit an information flow between a controlled subject and controlled information via a controlled operation if the following rules hold: No operations is allowed other than via the TSF-provided inter-VM communication channels specified by FDP_ACC.2(RACF-PSO) and FDP ACC.2(RACF-TSO).
- FDP_IFF.1.3 The TSF shall enforce theno additional information flow control SFP rules.
- **FDP_IFF.1.4** The TSF shall explicitly authorise an information flow based on the following rules: **None**.
- **FDP_IFF.1.5** The TSF shall explicitly deny an information flow based on the following rules: **None**.

6.1.3.14 Hierarchical security attributes (FDP_IFF.2(LS) (Labeled Security Mode only))

- **FDP_IFF.2.1** The TSF shall enforce the *Mandatory Access Control Policy* Multilevel Confidentiality Information Flow Control Policy based on the following types of subject and object security attributes:
 - a) Subject security attributes:
 - Sensitivity label of the subject consisting of at least 8 site definable hierarchical levels and a set of 60 site definable non-hierarchical categories;
 - ii. none;

Last update: 2013-01-18

Version: 1.1 Classification: Public Page 56 of 114

- b) Object security attributes:
 - the sensitivity label of the object consisting of at least 8 site definable hierarchical levels and a set of 60 site definable non-hierarchical categories;
 - ii. none.
- FDP IFF.2.2 The TSF shall permit an information flow between a controlled subject and controlled object via a controlled operation if the following rules, based on the ordering relationships between security attributes hold:
 - If the sensitivity label of the subject is greater than or equal to the sensitivity label of the object, then the flow of information from the object to the subject is permitted (a read operation);
 - If the sensitivity label of the object is greater than or equal to the b) sensitivity label of the subject; then the flow of information from the subject to the object is permitted (a write operation);
 - If the information flow is between objects, the sensitivity label of the destination object must be greater than or equal to the sensitivity label of the source object.

Application Note: If the label of the object is greater than the label of the subject, this is a blind append (i.e., write does not imply a read).

- FDP IFF.2.3 The TSF shall enforce the following additional information flow control SFP rules: security label SYSNONE excludes a user or resource from mandatory access control verification.
- FDP IFF.2.4 The TSF shall explicitly authorise an information flow based on the following rules: none.
- FDP IFF.2.5 The TSF shall explicitly deny an information flow based on the following rules: Objects with the security label "no seclabel specified" cause all MAC access checks to fail for the corresponding subject or object.
- FDP IFF.2.6 The TSF shall enforce the following relationships for any two valid information flow control security attributes:
 - There exists an ordering function that, given two valid security attributes, determines if the security attributes are equal, if one security attribute is greater than the other, or if the security attributes are incomparable with the following properties:
 - Sensitivity labels are equal if the hierarchical levels of both labels are equal and the non-hierarchical category sets are identical;
 - Sensitivity label A is greater than sensitivity label B if the hierarchical level of A is greater than or equal to the hierarchical level of B, and the non-hierarchical category set of A is identical to or a superset of the non-hierarchical category set of B;
 - Sensitivity labels are incomparable if they are not equal and neither label is greater than the other as defined in 1 and 2 above;
 - There exists a "least upper bound" in the set of security attributes, such that, given any two valid security attributes, there is a valid security attribute that is greater than or equal to the two valid security attributes; and

Classification: Public Version: 1.1 Page 57 of 114 Last update: 2013-01-18

c) There exists a "greatest lower bound" in the set of security attributes, such that, given any two valid security attributes, there is a valid security attribute that is not greater than the two valid security attributes.

6.1.3.15 Import of user data without security attributes (FDP_ITC.1(LS) (Labeled Security Mode only))

- **FDP_ITC.1.1** The TSF shall enforce the *Mandatory Access Control Policy* Multilevel Confidentiality Information Flow Control Policy when importing unlabeled user data controlled under the *MAC policy* FP, from outside of the TOE.
- **FDP_ITC.1.2** The TSF shall ignore any label-related security attributes associated with the unlabeled user data when imported from outside the TOE.
- **FDP_ITC.1.3** The TSF shall enforce the following rules when importing unlabeled user data controlled under the *MAC policySFP* from outside the TOE:
 - a) When importing unlabeled data, the TSF shall allow the **authorized administrator** to specify that the data is to be labeled with: **a label manually chosen by the authorized administrator.**
 - b) devices used to import data without security attributes cannot be used to import data with security attributes unless the change in device state is performed manually and is auditable.

6.1.3.16 Import of user data with security attributes (FDP_ITC.2(BA))

- The TSF shall enforce the *RACF* Persistent Storage Access Control Policy, *RACF*Transient Storage Access Control Policy, Network Information Flow Control Policy,
 no other access control SFP(s) and/or information flow control SFP(s)
 when importing user data, controlled under the SFP, from outside of the TOE.
- **FDP_ITC.2.2** The TSF shall use the security attributes associated with the imported user data.
- **FDP_ITC.2.3** The TSF shall ensure that the protocol used provides for the unambiguous association between the security attributes and the user data received.
- **FDP_ITC.2.4** The TSF shall ensure that interpretation of the security attributes of the imported user data is as intended by the source of the user data.
- The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TOE: **no additional importation control rules.**

6.1.3.17 Import of user data with security attributes: labeled security (FDP ITC.2(LS) (Labeled Security Mode only))

- **FDP_ITC.2.1** The TSF shall enforce the *Mandatory Access Control Policy* Multilevel Confidentiality Information Flow Control Policy when importing labeled user data, controlled under the *MAC policy*-SFP, from outside of the TOE.
- **FDP_ITC.2.2** The TSF shall use the label-related security attributes associated with the imported labeled user data.
- **FDP_ITC.2.3** The TSF shall ensure that the protocol used provides for the unambiguous association between the security attributes and the user data received.
- **FDP_ITC.2.4** The TSF shall ensure that interpretation of the label-related security attributes of the imported user data is as intended by the source of the user data.

Version: 1.1 Classification: Public Page 58 of 114

- **FDP_ITC.2.5** The TSF shall enforce the following rules when importing user data controlled under the *MAC policy-SFP* from outside the TOE:
 - Devices used to import data with security attributes shall unambiguously associate security labels with the corresponding data;
 - b) Security labels consist of the following:
 - i. a hierarchical level; and
 - ii. a set of non-hierarchical categories.

6.1.3.18 Import of user data with security attributes (FDP_ITC.2(VIRT))

- **FDP_ITC.2.1** The TSF shall enforce the Compartment Access Control PolicyRACF Persistent Storage Object Access Control Policy, RACF Transient Storage Object Access Control Policy, and Compartment Information Flow Control Policy when importing user data, controlled under the SFP, from outside of the TOE.
- **FDP_ITC.2.2** The TSF shall use the security attributes associated with the imported user data.
- **FDP_ITC.2.3** The TSF shall ensure that the protocol used provides for the unambiguous association between the security attributes and the user data received.
- **FDP_ITC.2.4** The TSF shall ensure that interpretation of the security attributes of the imported user data is as intended by the source of the user data.
- **FDP_ITC.2.5** The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TOE: **no additional importation control rules**.

6.1.3.19 Full residual information protection (FDP RIP.2)

FDP_RIP.2.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the **allocation of the resource to** all objects.

6.1.3.20 Full residual information protection of resources (FDP_RIP.3)

FDP_RIP.3.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the **allocation of the resource to** all subjects or users.

6.1.4 Identification and authentication (FIA)

6.1.4.1 Authentication failure handling (FIA_AFL.1)

- The TSF shall detect when an administrator-configurable number of unsuccessful authentication attempts for the authentication method password-based authentication occur related to consecutive unsuccessful authentication attempts.
- **FIA_AFL.1.2** When the defined number of unsuccessful authentication attempts has been **surpassed**, the TSF shall:
 - For all accounts with the SPECIAL attribute, the operator is prompted whether the user status should be set to REVOKE when the limit is reached.
 - b) For all other accounts, the TSF shall set the user status to REVOKE.

Version: 1.1 Classification: Public Page 59 of 114

c) For all disabled accounts, any response to an authentication attempt given to the user shall not be based on the result of that authentication attempt.

6.1.4.2 User attribute definition (FIA_ATD.1(HU))

- **FIA_ATD.1.1** The TSF shall maintain the following list of security attributes belonging to individual human users:
 - a) User identifier:
 - b) Group memberships;
 - c) User password;
 - d) Software token verification data;
 - e) Security roles;
 - f) default access rights for objects created by the user (UACC) in the user's default group;
 - g) classes in which the user can define profiles (CLAUTH);
 - h) User's attributes including group-level attributes;
 - i) User's group authorities.

6.1.4.3 User attribute definition (FIA_ATD.1(TU))

- **FIA_ATD.1.1** The TSF shall maintain the following list of security attributes belonging to individual technical users:
 - a) the logical or physical network interface through which the network data entered the TOE:
 - b) identity of the logical or physical external interface through which the user connected to the TOE;
 - c) **VLAN tag.**

6.1.4.4 User attribute definition: labeled security (FIA_ATD.1(LS))

- **FIA_ATD.1.1** The TSF shall maintain the following list of security attributes belonging to individual users:
 - a) Sensitivity label (in Labeled Security Mode),
 - b) user clearances (in Labeled Security Mode).

6.1.4.5 Verification of secrets (FIA SOS.1)

FIA_SOS.1.1 The TSF shall provide a mechanism to verify that secrets meet the following quality metric: the probability that a secret can be obtained by an attacker during the lifetime of the secret is less than 2^-20.

Application Note: The CC guide contains configuration suggestions for the password quality mechanism that covers the above mentioned probability. These configuration suggestions assume the worst-case scenario when attacking these settings.

Version: 1.1 Classification: Public Page 60 of 114

6.1.4.6 Timing of authentication (FIA_UAU.1)

FIA_UAU.1.1 The TSF shall allow

- the information flow covered by the Network Information Flow Control Policy;
- b) providing credentials and (in labeled security mode) selection of security label
- c) use of the LOGON and LOGOFF command

on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.7 Multiple authentication mechanisms (FIA_UAU.5)

- **FIA_UAU.5.1** The TSF shall provide the following authentication mechanisms:
 - a) Authentication based on username and password and passphrases;
 - b) Authentication based on software token verification data;
 - c) no other authentication mechanisms

to support user authentication.

- **FIA_UAU.5.2** The TSF shall authenticate any user's claimed identity according to the following rules:
 - a) Authentication based on username and password/passphrase is performed for TOE-originated requests and credentials stored by the TSF;
 - b) Authentication based on software token verification data is performed for TOE-originated requests;
 - c) **no other rules.**

Application Note:

The SSL/TLS channel can be configured to perform certificate-based authentication to using bi-directional certificate validation. The SSL server establishes access to the CP console. Therefore, with an SSL certificate authentication the user has to provide his password/passphrase to authenticate with the CP console.

6.1.4.8 Protected authentication feedback (FIA_UAU.7)

FIA_UAU.7.1 The TSF shall provide only obscured feedback to the user while the authentication is in progress.

6.1.4.9 Timing of identification (FIA_UID.1)

- **FIA_UID.1.1** The TSF shall allow
 - a) providing credentials and (in labeled security mode) selection of security label
 - b) use of the LOGON and LOGOFF command

on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

Version: 1.1 Classification: Public Page 61 of 114

6.1.4.10 User identification before any action (FIA UID.2(VIRT))

FIA UID.2.1 The TSF shall require each compartment user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.11 User-subject binding (FIA USB.1(LS) (Labeled Security Mode only))

- FIA USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user:
 - User sensitivity label that is used to enforce the Mandatory Access Control PolicyMultilevel Confidentiality Information Flow Control Policywhich consists of the following:
 - i A hierarchical level; and
 - A set of non-hierarchical categories.
- FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users:
 - a) The sensitivity label associated with a subject shall be within the clearance range of the user.
- FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: None.

6.1.4.12 Enhanced user-subject binding (FIA USB.2)

- FIA_USB.2.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user:
 - a) The user identity that is associated with auditable events;
 - The user security attributes that are used to enforce the RACF Persistent b) Storage Object Access Control Policy;
 - The user security attributes that are used to enforce the *RACF* Transient c) Storage Object Access Control Policy;
 - The software token that can be used for subsequent identification and d) authentication with the TSF or other remote IT systems;
 - Active roles; e)
 - Active groups;
 - RACF attributes/roles SPECIAL, group-SPECIAL, AUDITOR, group-AUDITOR, CLAUTH and OPERATIONS associated with the user or any of the user's groups.
- FIA_USB.2.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users: a started virtual machine executes with the user ID of the logged in user it has been defined for.
- FIA USB.2.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: a z/VM user can change his z/VM user ID with the DIAGNOSE code D4, provided the user is authorized to use this DIAGNOSE code and has been given explicit authorization to assume the identity of a given user.

Version: 1.1 Classification: Public Page 62 of 114 Last update: 2013-01-18

FIA_USB.2.4 The TSF shall enforce the following rules for the assignment of subject security attributes not derived from user security attributes when a subject is created: **no rules**.

6.1.5 Security management (FMT)

6.1.5.1 Management of object security attributes (FMT_MSA.1(DAC))

- The TSF shall enforce the RACF Persistent Storage Object Access Control Policy , RACF Transient Storage Object Access Control Policy, RACF System Object Access Control Policy, CP Access Control Policy to restrict the ability to modify change_default, query the security attributes of the associated with the named objects covered by the SFP to the owner of the resource profile of the named object and users with
 - the SPECIAL attribute or the appropriate group-SPECIAL attribute,
 - the CLAUTH attribute for the class the resource is assigned to,
 - and users who have ALTER authority to the object.

Application note: Since the DAC policies contain persistent as well as transient and other objects and thus cover both FDP_ACC.2(PSO) and FDP_ACC.2(TSO) claimed in the [OSPP], and in addition both DAC mechanism implemented in RACF and CP are enforced on identical objects: the CP commands and DIAGNOSE codes listed in FDP_ACC.2(CP); there is only one management SFR for DAC required.

Application Note: This SFR also covers FMT_MSA.1(VIRT-CACP) specified by the OSPP extended package on virtualization.

6.1.5.2 Management of object security attributes: labeled security (FMT_MSA.1(LS) (Labeled Security Mode only))

The TSF shall enforce the Mandatory Access Control Policy Multilevel Confidentiality Information Flow Control Policy to restrict the ability to modify the label-related object security attributes to users that satisfy the following rules: users with the SPECIAL attribute or the appropriate group-SPECIAL attribute.

6.1.5.3 Management of security attributes (FMT_MSA.1(VIRT-CIFCP))

The TSF shall enforce the Compartment Information Flow Control Policy to restrict the ability to change_default, query, modify , **delete** the security attributes of the subjects and information covered by the SFP, **no additional security** attributes to the authorized administrator.

Application Note: This SFR covers the definition of a virtual machine and all its resources not covered by the persistent or transient storage object access control policies.

6.1.5.4 Static attribute initialisation (FMT_MSA.3(DAC))

FMT_MSA.3.1 The TSF shall enforce the *RACF* Persistent Storage Object Access Control Policy , *RACF Transient Storage Object Access Control Policy*, *RACF System Object Access Control Policy*, *CP Access Control Policy* to provide restrictive default values for security attributes that are used to enforce the SFP.

Version: 1.1 Classification: Public Page 63 of 114

FMT MSA.3.2 The TSF shall allow the authorized administrators, or the owner (non-Labeled Security Mode only) of the profile protecting the object to specify alternative initial values to override the default values when an object or information is created.

Application note: Since the DAC policies contain persistent as well as transient and other objects and thus cover both FDP ACC.2(PSO) and FDP ACC.2(TSO) claimed in the [OSPP], and in addition both DAC mechanism implemented in RACF and CP are enforced on identical objects: the CP commands and DIAGNOSE codes listed in FDP ACC.2(CP); there is only one management SFR for DAC required.

Application Note: This SFR also covers FMT MSA.3(VIRT-CACP) specified by the OSPP extended package on virtualization.

6.1.5.5 Static attribute initialisation (FMT MSA.3(NI))

- FMT MSA.3.1 The TSF shall enforce the Network Information Flow Control Policy to provide permissive default values for security attributes that are used to enforce the SFP.
- FMT MSA.3.2 The TSF shall allow the authorized administrator to specify alternative initial values to override the default values when an object or information is created.

6.1.5.6 Static attribute initialization: labeled security (FMT MSA.3(LS) (Labeled Security Mode only))

- FMT MSA.3.1 The TSF shall enforce the Mandatory Access Control Policy Multilevel Confidentiality Information Flow Control Policy to provide restrictive default values for security attributes that are used to enforce the Mandatory Access Control PolicySFP.
- FMT MSA.3.2 The TSF shall allow the **authorized administrator** to specify alternative initial values to override the default values when an object or information is created.

6.1.5.7 Static attribute initialisation (FMT MSA.3(VIRT-CIFCP))

- FMT_MSA.3.1 The TSF shall enforce the Compartment Information Flow Control Policy to provide restrictive default values for security attributes that are used to enforce the SFP.
- FMT MSA.3.2 The TSF shall allow the **authorized administrator** to specify alternative initial values to override the default values when an object or information is created.

6.1.5.8 Security attribute value inheritance (FMT MSA.4(DAC))

FMT_MSA.4.1 The TSF shall use the following rules to set the value of security attributes for Persistent Storage Objects: no rules for setting the values of security attributes.

Application Note: This SFR is applicable when a subject can create new objects. However, this TOE does not allow subjects to create new objects.

Version: 1.1 Classification: Public Page 64 of 114 Last update: 2013-01-18

6.1.5.9 Management of TSF data (FMT_MTD.1(AE))

- **FMT_MTD.1.1** The TSF shall restrict the ability to guery, modify the set of audited events to
 - a) users with the AUDITOR attribute or the appropriate group-AUDITOR attribute
 - b) for events related to a profile: the profile owner.

Application Note: This SFR applies to FAU SEL.1.

6.1.5.10 Management of TSF data (FMT MTD.1(AS))

The TSF shall restrict the ability to clear, **create**, **delete** the audit storage to users with the AUDITOR attribute or the appropriate group-AUDITOR attribute.

Application Note: This SFR applies to FAU STG.1.

6.1.5.11 Management of TSF data (FMT_MTD.1(AT))

- **FMT_MTD.1.1** The TSF shall restrict the ability to modify the
 - a) threshold of the audit trail when an action is performed;
 - b) action when the threshold is reached

to users with the AUDITOR attribute or the appropriate group-AUDITOR attribute.

Application Note: This SFR applies to FAU STG.3.

Application Note: As the threshold of the audit trail is always set to a value allowed within the TOE, it can only be modified. Therefore, the selection in FMT_MTD.1.1 is not applicable.

6.1.5.12 Management of TSF data (FMT_MTD.1(AF))

FMT_MTD.1.1 The TSF shall restrict the ability to modify the actions to be taken in case of audit storage failure to **the RACFVM user ID**.

Application Note: This SFR applies to FAU STG.4.

Application Note: As the list of actions is always defined within the TOE, it can only be modified. Therefore, the selection in FMT MTD.1.1 is not applicable.

Application Note: The RACFVM user ID is the virtual machine owner hosting the RACF instance. This ID is privileged in the sense as CP is configured to trust this ID to provide the authentication backend.

6.1.5.13 Management of TSF data (FMT MTD.1(NI))

- **FMT_MTD.1.1** The TSF shall restrict the ability to query, modify, delete, **no other operations** the security attributes for the rules governing the
 - a) identification of network data;
 - b) actions performed on the identified network data

to authorized administrators .

Application Note: This SFR applies to FDP IFF.1(NI).

Version: 1.1 Classification: Public Page 65 of 114

6.1.5.14 Management of TSF data (FMT_MTD.1(IAT))

FMT_MTD.1.1 The TSF shall restrict the ability to modify the threshold for unsuccessful authentication attempts to **authorized administrators** .

Application Note: This SFR applies to FIA_AFL.1.

6.1.5.15 Management of TSF data (FMT MTD.1(IAF))

FMT_MTD.1.1 The TSF shall restrict the ability to re-enable the authentication to the account subject to authentication failure to **authorized administrators** .

Application Note: This SFR applies to FIA AFL.1.

6.1.5.16 Management of TSF data (FMT_MTD.1(IAU))

- **FMT_MTD.1.1** The TSF shall restrict the ability to initialize, modify, delete the user security attributes to
 - a) the authorized administrator
 - b) users authorized to modify their own authentication data.

Application Note: This SFR applies to FIA ATD.1, FIA UAU.1, and FIA UID.1.

6.1.5.17 Management of TSF data (FMT MTD.1(VIRT-COMP))

FMT_MTD.1.1 The TSF shall restrict the ability to initialize, modify, delete the compartment security attributes to **authorized administrators**.

Application Note: This SFR applies to FIA_UID.2(VIRT).

6.1.5.18 Revocation of Object Attributes (FMT_REV.1(OBJ))

- **FMT_REV.1.1** The TSF shall restrict the ability to revoke object security attributes defined by SFPs associated with the corresponding object under the control of the TSF to
 - a) DAC permissions: owner of the resource profile of the named object and authorized administrators;
 - b) Other security attributes: authorized administrators.
- **FMT_REV.1.2** The TSF shall enforce the following rules:
 - The access rights associated with an object shall be enforced when an access check is made;
 - b) Labeled Security Mode only: the rules of the Mandatory Access Control Policy are enforced on all future operations.

6.1.5.19 Revocation of User Attributes (FMT_REV.1(USR))

FMT_REV.1.1 The TSF shall restrict the ability to revoke user security attributes defined by the SFP associated with the corresponding user under the control of the TSF to **the authorized administrators.**

Version: 1.1 Classification: Public Page 66 of 114

FMT REV.1.2 The TSF shall enforce the following rules:

- The enforcement of the revocation of security-relevant authorizations with the next user-subject binding process during the next authentication of the user:
- Revocations/modifications made by an authorized administrator to security attributes of a user like the user identifier, user name, user group(s), user password or assigned security labels shall be effective the next time the user logs in .

6.1.5.20 Specification of management functions (FMT SMF.1)

- **FMT SMF.1.1** The TSF shall be capable of performing the following management functions:
 - Management of auditing; a)
 - Management of cryptographic network protocols; b)
 - Management of RACF Persistent Storage Object Access Control Policy;
 - Management of RACF Transient Storage Object Access Control Policy; d)
 - Management of Network Information Flow Control Policy; e)
 - Management of identification and authentication policy; f)
 - Management of user security attributes; g)
 - Management of RACF System Object Access Control Policy; h)
 - Management of CP Access Control Policy.

6.1.5.21 Security roles (FMT SMR.1)

FMT SMR.1.1 The TSF shall maintain the roles:

- User role with the following rights:
 - Users are authorized to modify their own user password;
 - Users are authorized to modify the access control permissions for the named objects they own;
 - no other rights;
- users authorized by the RACF Persistent Storage Access Control **Policy or RACF Transient Storage Access Control Policy to modify** object security attributes;
- in Labeled Security Mode: users authorized by the Mandatory Access Control Policy to modify object security attributes;
- users authorized to modify their own authentication data; d)
- authorized administrators (users with the SPECIAL or group-SPECIAL attribute in their profile);
- f) RACF auditors (users who have the AUDITOR or group-AUDITOR attribute in their profiles);
- Operations roles (users with the OPERATIONS or group-OPERATIONS attribute);
- Users authorized to define profiles in a class (CLAUTH attribute in their profile for the particular class).

The TSF shall be able to associate users with roles. FMT SMR.1.2

Classification: Public Version: 1.1 Page 67 of 114 Last update: 2013-01-18

6.1.6 Protection of the TSF (FPT)

6.1.6.1 Reliable time stamps (FPT STM.1)

The TSF shall be able to provide reliable time stamps. FPT STM.1.1

6.1.6.2 Inter-TSF basic TSF data consistency (FPT TDC.1(BA))

- FPT TDC.1.1 The TSF shall provide the capability to consistently interpret the following data types:
 - a) Packet filter: VLAN tag out of the IP header;

when shared between the TSF and another trusted IT product.

- FPT TDC.1.2 The TSF shall use the following interpretation rules:
 - a) Packet filter: VLAN tag specification provided in IEEE 802.1Q when interpreting the TSF data from another trusted IT product.

6.1.6.3 Inter-TSF basic TSF data consistency: labeled security (FPT TDC.1(LS) (Labeled Security Mode only))

- FPT TDC.1.1 The TSF shall provide the capability to consistently interpret label-related security attributes, and no other TSF data when shared between the TSF and another trusted IT product.
- FPT TDC.1.2 The TSF shall use the list of security labels to be applied by the TSF when interpreting the TSF data from another trusted IT product.

Application note: Inter-TSF data consistency shall ensure that access control information including security labels are consistently interpreted when this information is shared between different instantiations of the TOE. In order to do this, at least the definition of the security labels between the systems involved have to be identical.

6.1.6.4 Inter-TSF basic TSF data consistency: virtualization (FPT TDC.1(VIRT))

- FPT TDC.1.1 The TSF shall provide the capability to consistently interpret access control and information flow control-related security attributes, and no additional TSF data **types** when shared between the TSF and another trusted IT product.
- FPT TDC.1.2 The TSF shall use the IP addresses part of the network packet transmitted by the TSF as specified in RFC 791 when interpreting the TSF data from another trusted IT product.

6.1.7 TOE access (FTA)

6.1.7.1 TSF-initiated session locking (FTA SSL.1)

- FTA_SSL.1.1 The TSF shall lock an interactive session to a human user maintained by the TSF after an administrator-defined time interval of user inactivity by:
 - clearing or overwriting TSF controlled display devices, making the current contents unreadable;

Version: 1.1 Classification: Public Page 68 of 114 Last update: 2013-01-18

- b) disabling any activity of the user's TSF controlled data access/TSF controlled display devices other than unlocking the session.
- **FTA_SSL.1.2** The TSF shall require the following events to occur prior to unlocking the session:
 - Successful re-authentication with the credentials of the user owning the session using one of the authentication methods out of the list of allowed methods specified in FIA UAU.5;
 - b) no other events.

Application Note: It is possible that the TSF establishes a connection to a session on a remote trusted IT system, for example when using Telnet. This remote trusted IT system maintains the session established with the communication channel. The locking requirement however applies to the session maintained by the TSF only as the TSF can only exercise control of the sessions it maintains.

6.1.7.2 User-initiated locking (FTA_SSL.2)

- **FTA_SSL.2.1** The TSF shall allow user-initiated locking of the user's own interactive session maintained by the TSF, by:
 - a) clearing or overwriting TSF controlled display devices, making the current contents unreadable:
 - b) disabling any activity of the user's TSF controlled data access/TSF controlled display devices other than unlocking the session.
- **FTA_SSL.2.2** The TSF shall require the following events to occur prior to unlocking the session:
 - Successful re-authentication with the credentials of the user owning the session using one of the authentication methods out of the list of allowed methods specified in FIA_UAU.5;
 - b) no other events.

Application Note: It is possible that the TSF establishes a connection to a session on a remote trusted IT system, for example when using Telnet. This remote trusted IT system maintains the session established with the communication channel. The locking requirement however applies to the session maintained by the TSF only, as the TSF can only exercise control of the sessions it maintains.

6.1.8 Trusted path/channels (FTP)

Last update: 2013-01-18

6.1.8.1 Inter-TSF trusted channel (FTP_ITC.1)

- **FTP_ITC.1.1** The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification and disclosure using the following mechanisms:
 - a) Cryptographically-protected communication channel using SSLv3, TLSv1, or TLSv1.1;
 - b) physically protected communication channels provided by the TOE environment.
- The TSF shall permit **the TSF, another trusted IT product** to initiate communication via the trusted channel.

Version: 1.1 Classification: Public Page 69 of 114

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for all security functions specified in the ST that interact with remote trusted IT systems and no other functions and conditions.

6.2 Security Functional Requirements Rationale

6.2.1 Security Requirements Coverage

The following table provides a mapping of SFR to the security objectives, showing that each security functional requirement addresses at least one security objective.

Security Functional Requirements	Objectives
FAU_GEN.1	O.AUDITING
FAU_GEN.2	O.AUDITING
FAU_SAR.1	O.AUDITING
FAU_SAR.2	O.AUDITING
FAU_SAR.3	O.AUDITING
FAU_SEL.1	O.AUDITING
FAU_STG.1	O.AUDITING
FAU_STG.3	O.AUDITING
FAU_STG.4	O.AUDITING
FCS_CKM.1(SYM)	O.CRYPTO.NET
FCS_CKM.1(RSA)	O.CRYPTO.NET
FCS_CKM.1(DSA)	O.CRYPTO.NET
FCS_CKM.2(NET)	O.CRYPTO.NET
FCS_CKM.4	O.CRYPTO.NET
FCS_COP.1(NET)	O.CRYPTO.NET
FCS_RNG.1	O.CRYPTO.NET
FDP_ACC.2(RACF-PSO)	O.COMP.RESOURCE_ACCESS, O.DISCRETIONARY.ACCESS
FDP_ACC.2(RACF-TSO)	O.COMP.RESOURCE_ACCESS, O.DISCRETIONARY.ACCESS, O.SUBJECT.COM
FDP_ACC.2(RACF-SYSTEM)	O.DISCRETIONARY.ACCESS
FDP_ACC.2(CP)	O.DISCRETIONARY.ACCESS

Page 70 of 114 Version: 1.1 Classification: Public Last update: 2013-01-18

Security Functional Requirements	Objectives
FDP_ACF.1(RACF)	O.COMP.RESOURCE_ACCESS, O.DISCRETIONARY.ACCESS, O.SUBJECT.COM
FDP_ACF.1(CP)	O.DISCRETIONARY.ACCESS
FDP_ETC.2(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY, O.LS.PRINT
FDP_ETC.2(VIRT)	O.COMP.INFO_FLOW_CTRL, O.COMP.RESOURCE_ACCESS
FDP_IFC.2(NI)	O.NETWORK.FLOW
FDP_IFC.2(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY
FDP_IFC.2(VIRT)	O.COMP.INFO_FLOW_CTRL
FDP_IFF.1(NI)	O.NETWORK.FLOW
FDP_IFF.1(VIRT)	O.COMP.INFO_FLOW_CTRL
FDP_IFF.2(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY
FDP_ITC.1(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY, O.LS.LABEL
FDP_ITC.2(BA)	O.DISCRETIONARY.ACCESS, O.NETWORK.FLOW, O.SUBJECT.COM
FDP_ITC.2(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY, O.LS.LABEL
FDP_ITC.2(VIRT)	O.COMP.INFO_FLOW_CTRL, O.COMP.RESOURCE_ACCESS
FDP_RIP.2	O.AUDITING, O.CRYPTO.NET, O.DISCRETIONARY.ACCESS, O.I&A, O.NETWORK.FLOW, O.SUBJECT.COM
FDP_RIP.3	O.AUDITING, O.CRYPTO.NET, O.DISCRETIONARY.ACCESS, O.I&A, O.NETWORK.FLOW, O.SUBJECT.COM
FIA_AFL.1	O.I&A
FIA_ATD.1(HU)	O.I&A
FIA_ATD.1(TU)	O.NETWORK.FLOW

Version: 1.1 Classification: Public Page 71 of 114

Last update: 2013-01-18 Copyright © 2013 by atsec information security and IBM

Security Functional Requirements	Objectives
FIA_ATD.1(LS)	O.LS.LABEL
FIA_SOS.1	O.I&A
FIA_UAU.1	O.I&A
FIA_UAU.5	O.I&A
FIA_UAU.7	O.I&A
FIA_UID.1	O.I&A, O.NETWORK.FLOW
FIA_UID.2(VIRT)	O.COMP.IDENT
FIA_USB.1(LS) (Labeled Security Mode only)	O.LS.LABEL
FIA_USB.2	O.I&A
FMT_MSA.1(DAC)	O.COMP.RESOURCE_ACCESS, O.MANAGE
FMT_MSA.1(LS) (Labeled Security Mode only)	O.LS.LABEL
FMT_MSA.1(VIRT-CIFCP)	O.COMP.INFO_FLOW_CTRL
FMT_MSA.3(DAC)	O.COMP.RESOURCE_ACCESS, O.MANAGE
FMT_MSA.3(NI)	O.MANAGE
FMT_MSA.3(LS) (Labeled Security Mode only)	O.LS.LABEL
FMT_MSA.3(VIRT-CIFCP)	O.COMP.INFO_FLOW_CTRL
FMT_MSA.4(DAC)	O.MANAGE
FMT_MTD.1(AE)	O.MANAGE
FMT_MTD.1(AS)	O.MANAGE
FMT_MTD.1(AT)	O.MANAGE
FMT_MTD.1(AF)	O.MANAGE
FMT_MTD.1(NI)	O.MANAGE
FMT_MTD.1(IAT)	O.MANAGE
FMT_MTD.1(IAF)	O.MANAGE
FMT_MTD.1(IAU)	O.MANAGE
FMT_MTD.1(VIRT-COMP)	O.COMP.INFO_FLOW_CTRL, O.COMP.RESOURCE_ACCESS
FMT_REV.1(OBJ)	O.MANAGE

Version: 1.1 Classification: Public Page 72 of 114 Last update: 2013-01-18

Security Functional Requirements	Objectives
FMT_REV.1(USR)	O.MANAGE
FMT_SMF.1	O.MANAGE
FMT_SMR.1	O.MANAGE
FPT_STM.1	O.AUDITING
FPT_TDC.1(BA)	O.DISCRETIONARY.ACCESS, O.NETWORK.FLOW, O.SUBJECT.COM
FPT_TDC.1(LS) (Labeled Security Mode only)	O.LS.CONFIDENTIALITY, O.LS.LABEL
FPT_TDC.1(VIRT)	O.COMP.INFO_FLOW_CTRL, O.COMP.RESOURCE_ACCESS
FTA_SSL.1	O.I&A
FTA_SSL.2	O.I&A
FTP_ITC.1	O.TRUSTED_CHANNEL

Table 7: Mapping of security functional requirements to security objectives

6.2.2 Security Requirements Sufficiency

Last update: 2013-01-18

The following rationale provides justification for each security objective for the TOE, showing that the security functional requirements are suitable to meet and achieve the security objectives:

Security objectives	Rationale
O.AUDITING	The events to be audited are defined in FAU_GEN.1 and are associated with the identity of the user that caused the event (FAU_GEN.2). Authorized users are provided the capability to read the audit records (FAU_SAR.1), while all other users are denied access to the audit records (FAU_SAR.2). The TOE provides a review facility which allows searching of audit trails (FAU_SAR.3). The authorized user must have the capability to specify which audit records are generated (FAU_SEL.1). The TOE prevents the audit log from being modified or deleted (FAU_STG.1) and ensures that the audit log is not lost due to resource shortage (FAU_STG.3, FAU_STG.4). To support auditing, the TOE is able to maintain proper time stamps (FPT_STM.1).
	protected sources FDP_RIP.2, FDP_RIP.3.
O.CRYPTO.NET	The cryptographically-protected network protocol (FCS_COP.1(NET)) is supported by the generation of symmetric keys (FCS_CKM.1(SYM)), as well as asymmetric keys (FCS_CKM.1(RSA), FCS_CKM.1(DSA)). Key generation is supported by the provision of good-quality random numbers (FCS_RNG.1). As part of the cryptographic network protocol, the TOE

Version: 1.1 Classification: Public Page 73 of 114

Security objectives	Rationale
	securely exchanges the symmetric key with a remote trusted IT system (FCS_CKM.2(NET)). The TOE ensures that all keys are zeroized upon de-allocation (FCS_CKM.4).
	The protection of reused resources ensures that no data leaks from other protected sources (FDP_RIP.2, FDP_RIP.3).
O.DISCRETIONARY.ACCESS	The TSF must control access to resources based on the identity of users that are allowed to specify which resources they want to access for storing their data.
	The access control policy must have a defined scope of control (FDP_ACC.2(RACF-PSO), FDP_ACC.2(RACF-TSO), FDP_ACC.2(RACF-SYSTEM), as well as FDP_ACC.2(CP)). The rules for the access control policy are defined (FDP_ACF.1(RACF), FDP_ACF.1(CP)). When import of user data is allowed, the TOE must ensure that user data security attributes required by the access control policy are correctly interpreted (FDP_ITC.2(BA), FPT_TDC.1(BA)).
	The protection of reused resources ensures that no data leaks from other protected sources (FDP_RIP.2, FDP_RIP.3).
O.NETWORK.FLOW	The network information flow control mechanism controls the information flowing between different entities (FDP_IFC.2(NI)). The TOE implements a rule-set governing the information flow (FDP_IFF.1(NI)). To facilitate the information flow control, the information must be identified (FIA_UID.1) based on security attributes the TOE can maintain (FIA_ATD.1(TU)). The TOE must ensure that security attributes of the network data required by the information flow control policy are correctly interpreted (FDP_ITC.2(BA), FPT_TDC.1(BA)). The protection of reused resources ensures that no data leaks from other
O.SUBJECT.COM	protected sources (FDP_RIP.2, FDP_RIP.3). The TSF must control the exchange of data using transient storage
O.JOBJECT.COM	objects between subjects based on the identity of users.
	The access control policy must have a defined scope of control (FDP_ACC.2(RACF-TSO)). The rules for the access control policy are defined (FDP_ACF.1(RACF)). When import of user data is allowed, the TOE must ensure that user data security attributes required by the access control policy are correctly interpreted (FDP_ITC.2(BA), FPT_TDC.1(BA)).
	The protection of reused resources ensures that no data leaks from other protected sources (FDP_RIP.2, FDP_RIP.3).
O.I&A	The TSF must ensure that only authorized users gain access to the TOE and its resources. Human users authorized to access the TOE must use an identification and authentication process (FIA_UID.1, FIA_UAU.1). Multiple I&A mechanisms are allowed as specified in FIA_UAU.5. To ensure authorized access to the TOE, authentication data is protected (FIA_ATD.1(HU), FIA_UAU.7). Proper authorization for subjects acting on behalf of users is also ensured (FIA_USB.2). The appropriate strength of the authentication mechanism is ensured (FIA_SOS.1). To support the strength of authentication methods, the TOE is capable of identifying

Version: 1.1 Classification: Public Page 74 of 114 Last update: 2013-01-18

Security objectives	Rationale			
	and reacting to unsuccessful authentication attempts (FIA_AFL.1). In addition, user-initiated and TSF-initiated session locking (FTA_SSL.1, FTA_SSL.2) protect the authenticated user's session.			
	The protection of reused resources ensures that no data leaks from other protected sources (FDP_RIP.2, FDP_RIP.3).			
O.MANAGE	The TOE provides management interfaces globally defined in FMT_SMF.1 for:			
	 the access control policies FMT_MSA.1(DAC), FMT_MSA.3(DAC); 			
	 the information flow control policy FMT_MSA.3(NI), FMT_MTD.1(NI); 			
	 the auditing aspects FMT_MTD.1(AE), FMT_MTD.1(AS), FMT_MTD.1(AT)]; 			
	 the identification and authentication aspects FMT_MTD.1(IAT), FMT_MTD.1(IAF), FMT_MTD.1(IAU). 			
	Persistently stored user data is stored either in hierarchical or relational fashion, which implies an inheritance of security attributes from parent objects (FMT_MSA.4(DAC)).			
	The rights management for the different management aspects is defined with FMT_SMR.1.			
	The management interfaces for the revocation of user and object attributes is provided with FMT_REV.1(OBJ) and FMT_REV.1(USR).			
O.TRUSTED_CHANNEL	The TOE provides a trusted channel protecting communication between a remote trusted IT system and itself (FTP_ITC.1).			
O.LS.CONFIDENTIALITY	The information flow control policy is defined by specifying the subjects, objects, security attributes and rules in FDP_IFC.2(LS) (Labeled Security Mode only), FDP_IFF.2(LS) (Labeled Security Mode only). Supportive to the enforcement of the policy are the automated label assignment when exporting data (FDP_ETC.2(LS) (Labeled Security Mode only)) and during the import of data (FDP_ITC.1(LS) (Labeled Security Mode only), FDP_ITC.2(LS) (Labeled Security Mode only)). For assigning labels to imported data, the label information transmitted with the data must be interpretable by the TOE (FPT_TDC.1(LS) (Labeled Security Mode only)).			
O.LS.PRINT	The addition of label information on exported data during printing is governed by FDP_ETC.2(LS) (Labeled Security Mode only).			
O.LS.LABEL	The assignment of labels to users is performed during user-subject binding (FIA_USB.1(LS) (Labeled Security Mode only)) with security attributes maintained by the TOE (FIA_ATD.1(LS)). Object labels are assigned to objects when importing them into the TOE (FDP_ITC.1(LS) (Labeled Security Mode only), FDP_ITC.2(LS) (Labeled Security Mode only), FPT_TDC.1(LS) (Labeled Security Mode only)). The management of labels is allowed for the TOE with FMT_MSA.1(LS) (Labeled Security Mode only), FMT_MSA.3(LS) (Labeled Security Mode only).			

Version: 1.1 Classification: Public Page 75 of 114 Last update: 2013-01-18

Security objectives	Rationale
O.COMP.INFO_FLOW_CTRL	The information flow control policy covering the runtime of the compartments is specified with FDP_IFC.2(VIRT) and FDP_IFF.1(VIRT).
	As the TOE shall allow export of data belonging to compartments, the TOE assigns the security attributes for enforcing the information flow control policy to the communicated data as specified with FDP_ETC.2(VIRT), FDP_ITC.2(VIRT), and FPT_TDC.1(VIRT).
	Management of the security attributes for the information flow control policy is specified with FMT_MSA.1(VIRT-CIFCP), and FMT_MSA.3(VIRT-CIFCP) as well as FMT_MTD.1(VIRT-COMP).
O.COMP.RESOURCE_ACCESS	The access control policy for the resources belonging to the different compartments is defined with FDP_ACC.2(RACF-PSO), FDP_ACC.2(RACF-TSO) and FDP_ACF.1(RACF).
	As the TOE shall allow export of data belonging to compartments, the TOE assigns the security attributes for enforcing the access control policy to the communicated data as specified with FDP_ETC.2(VIRT), FDP_ITC.2(VIRT), and FPT_TDC.1(VIRT).
	Management of the security attributes for the access control policy is specified with FMT_MSA.1(DAC), and FMT_MSA.3(DAC) as well as FMT_MTD.1(VIRT-COMP).
O.COMP.IDENT	The identification of compartments to support the information flow control and access control policies is established with FIA_UID.2(VIRT).

Table 8: Security objectives for the TOE rationale

6.2.3 Security Requirements Dependency Analysis

The following table demonstrates the dependencies of SFRs modeled in CC Part 2 and how the SFRs for the TOE resolve those dependencies:

Security Functional Requirement	Dependencies	Resolution	
FAU_GEN.1	FPT_STM.1	FPT_STM.1	
FAU_GEN.2	FAU_GEN.1	FAU_GEN.1	
	FIA_UID.1	FIA_UID.1	
FAU_SAR.1	FAU_GEN.1	FAU_GEN.1	
FAU_SAR.2	FAU_SAR.1	FAU_SAR.1	
FAU_SAR.3	FAU_SAR.1	FAU_SAR.1	
FAU_SEL.1	FAU_GEN.1	FAU_GEN.1	
	FMT_MTD.1	FMT_MTD.1(AE)	

Version: 1.1 Classification: Public Page 76 of 114

Security Functional Requirement	Dependencies	Resolution		
FAU_STG.1	FAU_GEN.1	FAU_GEN.1		
FAU_STG.3	FAU_STG.1	FAU_STG.1		
FAU_STG.4	FAU_STG.1	FAU_STG.1		
FCS_CKM.1(SYM)	[FCS_CKM.2 or FCS_COP.1]	FCS_COP.1(NET)		
	FCS_CKM.4	FCS_CKM.4		
FCS_CKM.1(RSA)	[FCS_CKM.2 or FCS_COP.1]	FCS_COP.1(NET)		
	FCS_CKM.4	FCS_CKM.4		
FCS_CKM.1(DSA)	[FCS_CKM.2 or FCS_COP.1]	FCS_COP.1(NET)		
	FCS_CKM.4	FCS_CKM.4		
FCS_CKM.2(NET)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1(SYM) FCS_CKM.1(RSA) FCS_CKM.1(DSA)		
	FCS_CKM.4	FCS_CKM.4		
FCS_CKM.4	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1(SYM)		
FCS_COP.1(NET)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1(SYM) FCS_CKM.1(RSA) FCS_CKM.1(DSA)		
	FCS_CKM.4	FCS_CKM.4		
FCS_RNG.1	No dependencies.			
FDP_ACC.2(RACF- PSO)	FDP_ACF.1	FDP_ACF.1(RACF)		
FDP_ACC.2(RACF-TSO)	FDP_ACF.1	FDP_ACF.1(RACF)		
FDP_ACC.2(RACF- SYSTEM)	FDP_ACF.1	FDP_ACF.1(RACF)		
FDP_ACC.2(CP)	FDP_ACF.1	FDP_ACF.1(CP)		
FDP_ACF.1(RACF)	FDP_ACC.1	FDP_ACC.2(RACF-PSO) FDP_ACC.2(RACF-TSO) FDP_ACC.2(RACF-SYSTEM)		
	FMT_MSA.3	FMT_MSA.3(DAC)		
FDP_ACF.1(CP)	FDP_ACC.1	FDP_ACC.2(CP)		
	FMT_MSA.3	FMT_MSA.3(DAC)		

Version: 1.1 Classification: Public
Last update: 2013-01-18 Copyright © 2013 by atsec information security and IBM

Security Functional Requirement	Dependencies	Resolution			
FDP_ETC.2(LS) (La beled Security Mode only)	[FDP_ACC.1 or FDP_IFC.1]	FDP_IFC.2(LS) (Labeled Security Mode only			
FDP_ETC.2(VIRT)	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.2(RACF-PSO) FDP_ACC.2(RACF-TSO) FDP_IFC.2(VIRT)			
FDP_IFC.2(NI)	FDP_IFF.1	FDP_IFF.1(NI)			
FDP_IFC.2(LS) (La beled Security Mode only)	FDP_IFF.1	FDP_IFF.2(LS) (Labeled Security Mode only)			
FDP_IFC.2(VIRT)	FDP_IFF.1	FDP_IFF.1(VIRT)			
FDP_IFF.1(NI)	FDP_IFC.1	FDP_IFC.2(NI)			
	FMT_MSA.3	FMT_MSA.3(NI)			
FDP_IFF.1(VIRT)	FDP_IFC.1	FDP_IFC.2(VIRT)			
	FMT_MSA.3	FMT_MSA.3(VIRT-CIFCP)			
FDP_IFF.2(LS) (La beled Security Mode	FDP_IFC.1	FDP_IFC.2(LS) (Labeled Security Mode only)			
only)	FMT_MSA.3	FMT_MSA.3(LS) (Labeled Security Mode only)			
FDP_ITC.1(LS) (La beled Security Mode	[FDP_ACC.1 or FDP_IFC.1]	FDP_IFC.2(LS) (Labeled Security Mode only)			
only)	FMT_MSA.3	FMT_MSA.3(LS) (Labeled Security Mode only)			
FDP_ITC.2(BA)	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.2(RACF-PSO) FDP_ACC.2(RACF-TSO) FDP_ACC.2(RACF-SYSTEM) FDP_ACC.2(CP) FDP_IFC.2(NI)			
	[FTP_ITC.1 or FTP_TRP.1]	FTP_ITC.1			
	FPT_TDC.1	FPT_TDC.1(BA)			
FDP_ITC.2(LS) (La	[FDP_ACC.1 or FDP_IFC.1]	FDP_IFC.2(LS) (Labeled Security Mode only)			
beled Security Mode only)	[FTP_ITC.1 or FTP_TRP.1]	FTP_ITC.1			
	FPT_TDC.1	FPT_TDC.1(LS) (Labeled Security Mode only)			

Version: 1.1 Classification: Public Page 78 of 114 Last update: 2013-01-18

Security Functional Requirement	Dependencies	Resolution
FDP_ITC.2(VIRT)	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.2(RACF-PSO) FDP_ACC.2(RACF-TSO) FDP_IFC.2(VIRT)
	[FTP_ITC.1 or FTP_TRP.1]	FTP_ITC.1
	FPT_TDC.1	FPT_TDC.1(VIRT)
FDP_RIP.2	No dependencies.	
FDP_RIP.3	No dependencies.	
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1
FIA_ATD.1(HU)	No dependencies.	
FIA_ATD.1(TU)	No dependencies.	
FIA_ATD.1(LS)	No dependencies.	
FIA_SOS.1	No dependencies.	
FIA_UAU.1	FIA_UID.1	FIA_UID.1
FIA_UAU.5	No dependencies.	
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1
FIA_UID.1	No dependencies.	
FIA_UID.2(VIRT)	No dependencies.	
FIA_USB.1(LS) (La beled Security Mode only)	FIA_ATD.1	FIA_ATD.1(LS)
FIA_USB.2	FIA_ATD.1	FIA_ATD.1(HU)
FMT_MSA.1(DAC)	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.2(RACF-PSO) FDP_ACC.2(RACF-TSO) FDP_ACC.2(RACF-SYSTEM)
	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MSA.1(LS) (La	[FDP_ACC.1 or FDP_IFC.1]	FDP_IFC.2(LS) (Labeled Security Mode only)
beled Security Mode only)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1

Version: 1.1 Classification: Public Page 79 of 114 Last update: 2013-01-18

Security Functional Requirement	Dependencies	Resolution
FMT_MSA.1(VIRT-	[FDP_ACC.1 or FDP_IFC.1]	FDP_IFC.2(VIRT)
CIFCP)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MSA.3(DAC)	FMT_MSA.1	FMT_MSA.1(DAC)
	FMT_SMR.1	FMT_SMR.1
FMT_MSA.3(NI)	FMT_MSA.1	Satisfied with FMT_MTD.1(NI) as per [OSPP].
	FMT_SMR.1	FMT_SMR.1
FMT_MSA.3(LS) (La beled Security Mode	FMT_MSA.1	FMT_MSA.1(LS) (Labeled Security Mode only)
only)	FMT_SMR.1	FMT_SMR.1
FMT_MSA.3(VIRT-	FMT_MSA.1	FMT_MSA.1(VIRT-CIFCP)
CIFCP)	FMT_SMR.1	FMT_SMR.1
FMT_MSA.4(DAC)	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.2(RACF-PSO)
FMT_MTD.1(AE)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(AS)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(AT)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(AF)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(NI)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(IAT)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(IAF)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1

Version: 1.1 Classification: Public
Last update: 2013-01-18 Copyright © 2013 by atsec information security and IBM

Security Functional Requirement	Dependencies	Resolution
FMT_MTD.1(IAU)	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1(VIRT-	FMT_SMR.1	FMT_SMR.1
COMP)	FMT_SMF.1	FMT_SMF.1
FMT_REV.1(OBJ)	FMT_SMR.1	FMT_SMR.1
FMT_REV.1(USR)	FMT_SMR.1	FMT_SMR.1
FMT_SMF.1	No dependencies.	
FMT_SMR.1	FIA_UID.1	FIA_UID.1
FPT_STM.1	No dependencies.	
FPT_TDC.1(BA)	No dependencies.	
FPT_TDC.1(LS) (La beled Security Mode only)	No dependencies.	
FPT_TDC.1(VIRT)	No dependencies.	
FTA_SSL.1	FIA_UAU.1	FIA_UAU.1
FTA_SSL.2	FIA_UAU.1	FIA_UAU.1
FTP_ITC.1	No dependencies.	

Table 9: TOE SFR dependency analysis

6.2.4 Mutual support of the security functions

The TOE's main purpose is the providing of virtual machines for each logged in user and to serve as a general-purpose operating system that can execute arbitrary software.

In order to control and supervise the correct and secure operation of the TOE, the audit trail stores information about the activity of subjects. The audit facility is provided by F.AU. Audit records are generated and can be reviewed by authorized users. Thus, accountability (as a result of prior authentication) and misuse detection is provided.

In order to allow users (including those in different special roles), identification and authentication of users is provided by F.I&A.

F.AC enforces access control decisions based on administrator-defined access control information for discretionary access control. In addition, administrator-defined sensitivity labels, security categories, and security labels are enforced by F.AC. Administrators themselves are not subject to any access restrictions.

Version: 1.1 Classification: Public Page 81 of 114 Last update: 2013-01-18

To manage user data, including access control and sensitivity/security attributes for subjects and objects, F.SM provides the necessary interfaces. Also the management of the audit function is provided by F.SM.

For serving the main purpose of providing virtual machines that are strictly separated, F.IP provides the facility to maintain such virtual machines. In addition, F.TP protects the TOE against tampering by and disclosure of confidential information to un-trusted subjects.

Since the TOE dynamically reallocates resources from one subject to another (such as memory or processors), F.OR ensures that these resources are cleared prior to reallocation. This function ensures that no residual information can be transmitted between objects and subjects.

As a result

Last update: 2013-01-18

- no security relevant transactions can be requested by users without being authenticated
- all transactions requested by users are subject to access control
- accountability for transactions is provided
- the management of user data, as well as access control data and the audit facility is controlled and restricted to authorized users
- no interference between virtual machines and between one virtual machine and the TOE can take place, which is not specifically allowed by the virtual machine configurations

6.3 Security Assurance Requirements

The following SAR was included from the OSPP base. It does not put an additional requirement on the product but requires the evaluator to check that all ST author notes from the PP have been dealt with in this security target.

The security assurance requirements for the TOE are the Evaluation Assurance Level 4 components as specified in [CC] part 3, augmented by ALC FLR.3.

The following table shows the Security assurance requirements, and the operations performed on the components according to CC part 3: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security assurance class	Security assurance requirement	Source	Operations			
assurance class			Iter.	Ref.	Ass.	Sel.
ASE Security Target evaluation	ASE_CCL.1(CCL) Conformance claims	CC Part 3	No	Yes	No	No
larget evaluation	ASE_INT.1 ST introduction	CC Part 3	No	No	No	No
	ASE_SPD.1 Security problem definition	CC Part 3	No	No	No	No
	ASE_OBJ.2 Security objectives	CC Part 3	No	No	No	No
	ASE_ECD.1 Extended components definition	CC Part 3	No	No	No	No
	ASE_REQ.2 Derived security requirements	CC Part 3	No	No	No	No
	ASE_TSS.1 TOE summary specification	CC Part 3	No	No	No	No
ADV Development	ADV_ARC.1 Security architecture description	CC Part 3	No	No	No	No
	ADV_FSP.4 Complete functional specification	CC Part 3	No	No	No	No

Version: 1.1 Classification: Public Page 82 of 114

Security assurance class	Security assurance requirement	Source	Operations			
assurance class			Iter.	Ref.	Ass.	Sel.
	ADV_IMP.1 Implementation representation of the TSF	CC Part 3	No	No	No	No
	ADV_TDS.3 Basic modular design	CC Part 3	No	No	No	No
AGD Guidance documents	AGD_OPE.1 Operational user guidance	CC Part 3	No	No	No	No
	AGD_PRE.1 Preparative procedures	CC Part 3	No	No	No	No
ALC Life-cycle support	ALC_CMC.4 Production support, acceptance proce dures and automation	CC Part 3	No	No	No	No
	ALC_CMS.4 Problem tracking CM coverage	CC Part 3	No	No	No	No
	ALC_DEL.1 Delivery procedures	CC Part 3	No	No	No	No
	ALC_DVS.1 Identification of security measures	CC Part 3	No	No	No	No
	ALC_FLR.3 Systematic flaw remediation	CC Part 3	No	No	No	No
	ALC_LCD.1 Developer defined life-cycle model	CC Part 3	No	No	No	No
	ALC_TAT.1 Well-defined development tools	CC Part 3	No	No	No	No
ATE Tests	ATE_COV.2 Analysis of coverage	CC Part 3	No	No	No	No
	ATE_DPT.1 Testing: basic design	CC Part 3	No	No	No	No
	ATE_FUN.1 Functional testing	CC Part 3	No	No	No	No
	ATE_IND.2 Independent testing - sample	CC Part 3	No	No	No	No
AVA Vulnerability assessment	AVA_VAN.3 Focused vulnerability analysis	CC Part 3	No	No	No	No

Table 10: Security assurance requirements

6.3.1 Security Target evaluation (ASE)

6.3.1.1 Conformance claims (ASE_CCL.1(CCL))

Content and presentation elements:

ASE CCL.1.10C

The conformance claim rationale shall demonstrate that the statement of security requirements is consistent with the statement of security requirements in the PPs including the statements marked as "ST-Author Note" and the specification given in section 8.1 of the OSPP base for which conformance is being claimed.

Application note: ASE CCL.1 specified in CC Part 3 is refined as follows: All Developer Action Elements, Content and Presentation Elements, Evaluator Action Elements remain unaltered, except for ASE CCL.1.10C as refined above.

Version: 1.1 Classification: Public Page 83 of 114 Last update: 2013-01-18

6.4 Security Assurance Requirements Rationale

The evaluation assurance level has been chosen commensurate with the threat environment that is experienced by typical consumers of the TOE. In addition, the evaluation assurance level has been augmented with ALC FLR.3 commensurate with the augmented flaw remediation capabilities offered by the developer beyond those required by the evaluation assurance level.

The refinement of ASE CCL.1.10C is considered to include certain requirements of the [OSPP] with which the ST author must comply. These requirements specify conditional requirements that only apply when the TOE shows special properties or mechanisms. The [CC] does not define such conditional statements, which are therefore introduced by the [OSPP].

Version: 1.1 Classification: Public Page 84 of 114 Last update: 2013-01-18

7 TOE Summary Specification

7.1 TOE Security Functionality

This chapter provides a summary of the security functions of z/VM that are subject to the evaluation. z/VM has more security functions than described in this chapter; only those that implement the security requirements claimed in chapter 1.5 are described here.

7.1.1 Overview of the TOE architecture

z/VM is an operating system operating on IBM System z architecture processors. Those processors provide the Start Interpretive Executive (SIE) environment and memory protection functions that allow z/VM to prohibit direct access from untrusted virtual machines to I/O devices used by other virtual machines, protected memory areas used by the TOE and memory areas used by other virtual machines. The underlying firmware also allows defining separate logical partitions allowing execution of several instances of the TOE on the same hardware as well as having the TOE execute in one logical partition while other non-TOE software is executing in other logical partitions. The logical partitioning function is part of the TOE environment and has been evaluated separately.

The TOE itself provides interfaces to applications and users allowing them to request TOE services.

The TOE provides the following security functions:

- An audit trail for security relevant events (F.AU)
- 2. Discretionary and (in Labeled Security Mode) Mandatory access control (F.AC)
- 3. Identification & authentication (F.I&A)
- 4. Interference Protection between virtual machines (F.IP)
- 5. Object re-use (F.OR)
- Security management functions to administer audit, discretionary access control and (in Labeled Security Mode) mandatory access control as well as users and groups with their related attributes (F.SM)
- TOE self protection functions based on security features provided by the underlying hardware 7. including memory protection and the provision of a privileged state allowing the TOE to reserve and protect a domain for its own execution (F.TP)

The TOE itself is structured into the following major units:

- The Control Program (CP) responsible for handling virtual machine environments, interrupts, logical processor scheduling, memory management including the management of address spaces.
- The Communication Server responsible for network communication using TCP/IP based protocols (the TCP/IP stack application also provides the Telnet service)
- 3. The Resource Access Control Facility (RACF) as the central system for discretionary and mandatory access control to resources

The TOE itself consists of a "nucleus" operating in the supervisor state and outside the SIE instruction environment of underlying abstract machine and a set of "trusted applications" that operate in dedicated virtual machines communicating with the nucleus over dedicated communication channels. Those trusted applications are granted access to specifically restricted interfaces provided by CP. The functionality behind these interfaces provides the capability of overriding or modifying system security policies. Therefore all trusted applications allowed to be executed in the evaluated configuration are considered to be part of the TOE.

Version: 1.1 Classification: Public Page 85 of 114 Last update: 2013-01-18

Trusted applications are executed in virtual machines dedicated for this task, i.e. no other functionality must be present in the respective virtual machine. These dedicated virtual machines are separated from other virtual machines using the security functionality provided by the nucleus. In addition, all storage area configured for these virtual machines are dedicated, hence no other virtual machine can access any portion of this storage area. Communication between trusted applications and the nucleus is established using the communication channels provided by the nucleus.

7.1.2 F.AU: Auditing

7.1.2.1 F.AU.1 - Generation of Audit Records

The TOE provides a general facility to collect data required for auditing. This function provided by RACF collects and records system audit data.

This component is used by the TOE to collect also security related audit information as required by FAU_GEN.1 and FAU_GEN.2.

Each SMF record consists of a standard header which contains (among other information) the type of the record and the time the record was produced. SMF supports up to 256 different record types where record types 0 to 127 are reserved for the Control Program.

One record type is usually reserved for a whole class of events where the individual events are identified by the record subtype or event code in the header of the SMF record.

RACF as the central access control function has several SMF record types reserved for its use, with record type number 80 being the most important one. The information recorded in this record type contains:

- The record type
- Time stamp (time and date)
- System identification
- Event code and qualifier
- User identification
- Group name
- A count of the relocate sections
- Authorities used to successfully execute commands or access resources
- Reasons for logging
- Command processing error flag
- Foreground user terminal ID
- Foreground user terminal level number
- Job log number (job name, entry time, and date)
- RACF version, release and modification number
- SECLABEL of user

Each record contains further data specific to the event code and qualifier.

This section maps to the following SFRs:

- FAU GEN.1
- FAU GEN.2
- FPT_STM.1

Version: 1.1 Classification: Public Page 86 of 114

7.1.2.2 F.AU.2 - Protection of the Audit Trail

RACF writes SMF audit records into dedicated CMS files that have been defined during system configuration. At least two minidisks must be defined holding the CMS files. Those CMS file need to be protected against unauthorized access by appropriate RACF profiles.

At initialization, RACF uses the SMF CONTROL file to determine on which of two minidisks to record SMF records. When RACF fills up the minidisk on which it began recording, it uses the SMF CONTROL file to determine the location of the alternate minidisk. When it switches minidisks, RACF updates the CURRENT field in the SMF CONTROL file (on RACF's A-disk) to reflect the minidisk that it is now recording on.

For archiving SMF audit records once the SMF minidisk fills up, RACF executes SMFPROF to archive the data to another location.

If no non-full minidisk is found, RACF will disable itself and all requests to access protected resources will fail. Only certain users will be permitted to logon and access resources for the purposes of clearing the system logs and re-enabling RACF. Once RACF is re-enabled, normal processing resumes.

This section maps to the following SFRs:

- FAU SAR.1
- FAU SAR.2 •
- FAU STG.1 and FMT MTD.1(AS)

7.1.2.3 F.AU.3 - Audit Configuration and Management

The system can be configured to halt on exhaustion of audit trail space in order to prevent audit data loss. Operators are warned when audit trail space consumption reaches a pre-defined threshold. With the initial configuration, RACF continues operation even if the SMF disk space is exhausted. Setting the SEVER keyword to YES, RACF severs the path between CP and RACF when the SMF disks are full, and RACF is unable to continue recording SMF records. To manage the audit subsystem in this state, the TOE provides an administrative ID for RACF that can log into the system without RACF being online. The credentials for this user are stored in the system directory.

RACF always generates audit records for events like unauthorized attempts to access the system or changes to the status of the RACF database. The security administrator, auditors and non-SPECIAL users with appropriate authorization can configure which additional optional security events are to be logged. In addition to writing records to the audit trail, messages can be sent to the security console to immediately alert operators of detected policy violations. RACF writes records for detected, unauthorized attempts to enter the system. Optionally, RACF writes records to SMF for authorized attempts and/or detected, unauthorized attempts to:

- Access RACF-protected resources
- Issue RACF commands
- Modify profiles on the RACF database

RACF writes SMF records to a CMS file. To list SMF records, either the RACF report writer or the RACF SMF data unload utility (IRRADU00) can be used. With the report writer, RACF SMF records can be selected to produce the reports. With the SMF data unload utility, RACF SMF records can be translated into a browsable format or uploaded to a database, query, or reporting package, such as DB2.

Classification: Public Version: 1.1 Page 87 of 114 Last update: 2013-01-18

RACF sends messages to the security console for detected, unauthorized attempts to enter the system and for detected, unauthorized attempts to access RACF-protected resources or modify profiles on the RACF database. The security console is the user defined in RACF CSTCONS macro (OPERATOR by default). As well as sending resource access violation messages only to the security console, RACF can send a message to a RACF-defined VM user. Each resource profile can contain the name of a user to be notified when RACF denies access to the resource. If the user is not logged on to the system at the time of the violation, the user receives a reader file that contains the notification information.

If access attempts are audited, and if the RACF function that issues a warning message instead of failing an invalid access attempt is selected (to allow for a more orderly migration to a RACF-protected system), RACF records each attempted access. For each access attempt that would have failed, RACF sends a warning message (ICH408I) to the accessor, but allows the access. If a "notify" user is specified in the resource profile, RACF also sends a message to that user. If you are deferring access authorization to VM through the use of the SYSSEC macro, and are auditing access attempts, RACF writes SMF records for access attempts that would have failed if you were not deferring.

This section maps to the following SFRs:

- FAU SAR.3
- FAU SEL.1 and FMT MTD.1(AE)
- FAU STG.3 and FMT MTD.1(AT)
- FAU STG.4 and FMT MTD.1(AF)

7.1.3 F.AC: Access Control

7.1.3.1 F.AC.1 - General Operation

z/VM provides the Resource Access Control Facility (RACF) as the component that performs access control between software running in virtual machines acting on behalf of a user and resources protected by the Object (Discretionary) and (in Labeled Security Mode) Mandatory access control policies. RACF uses user and resource profiles stored in the RACF database to decide if a subject has access to a resource. In addition to RACF, CP itself provides discretionary access control to CP commands and DIAGOSE codes, which is documented in section 7.1.3.6.

All z/VM components that have to make access decisions will call RACF via a single z/VM internal interface. The following figure shows the flow of requests and replies within z/VM when a request to access a protected resource is made.

Version: 1.1 Classification: Public Page 88 of 114 Last update: 2013-01-18

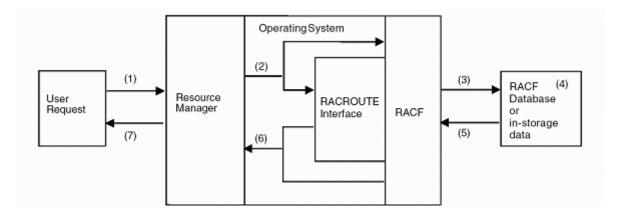


Figure 1: RACF and its relationship to the operating system

A program that wants to access a resource uses a function part of the external interface provided by the z/VM operating system to one of the z/VM components (1). An example is a program that wants to link to a minidisk.

CP calls the RACF component using the internal interface to RACF (the *RPI interface that connects to the RACROUTE interface) to check the access rights of the user that initiated the user request and passes the ID of the user and user attributes like the security label (in Labeled Security Mode), the name and type of the resource and the requested type of access to RACF (2). In addition to the RACROUTE interface, RACF also provides a resource check interface to CP to communicate more complex access control questions to RACF. As this resource check interface also transports queries to RACF, it is considered to be structurally equivalent as the RACROUTE interface.

RACF extracts the user profile, the resource profile from its external database or the internal cache (3) and checks if the user with his current security attributes is allowed to access the resource in the requested access mode (4 and 5).

RACF returns either a "yes" or a "no" decision for the access request in case the user and the resource are both known to RACF. If either of them is not known RACF returns a "don't know" return code (6). In the later case the resource manager needs to make its own decision whether to allow access or not. Depending on the decision the resource manager will either perform or reject the access request of the user program (7). In the evaluated configuration, CP interprets the "don't know" return code as "no".

7.1.3.2 F.AC.2 - Profiles

RACF makes access decisions based on information stored in profiles. RACF manages the following profiles:

- User profiles
- Group profiles
- General resource profiles

User Profiles

A user profile within RACF contains the following data:

Version: 1.1 Classification: Public Page 89 of 114

Name	Description		
USERID	User's identification (maximum 8 characters)		
NAME	User's name (not security relevant, since the user is allowed to change his name)		
OWNER	Owner of the user's profile		
DFLTGRP	User's default group (a user may change his default group to any group he is connected to)		
AUTHORITY	User's authority in the default group (use, create, connect, join)		
PASSWORD	User's password (Userid DES encrypted using the password - padded with blanks) as a key.		
REVOKE	Date on which RACF prevents the user from having access to the system (also an indicator if the user completely revoked)		
RESUME	Date on which RACF lets the user have access to the system again		
UACC	Default universal access authority for resource profiles that the user defines. Only applicable to DATASET and a few general resource classes).		
WHEN	Days of the week and hours of the day during which the user has access to the system (applies only to login via a terminal, not to other ports-of-entry)		
CLAUTH	Classes in which the user can define profiles		
SPECIAL	Gives the user the system-wide SPECIAL attribute		
AUDITOR	Gives the user the system-wide AUDITOR attribute		
OPERATIONS	Gives the user the system-wide OPERATIONS attribute		
SECLABEL	User's default security label		

Table 11: RACF user profile

Note that there is other security relevant user data that is not stored in the RACF user profile but in the user's VM directory entry.

This section maps to the following SFRs:

- FDP ACC.2(RACF-PSO), FDP ACC.2(RACF-TSO), FDP ACC.2(RACF-SYSTEM), and FDP_ACC.2(CP)
- FDP_IFC.2(NI), and FDP_IFC.2(VIRT)
- FIA_ATD.1(HU), and FIA_ATD.1(LS)
- FMT_MSA.1(DAC), FMT_MSA.1(LS), and FMT_MSA.1(VIRT-CIFCP)

Group Profiles

A group profile within RACF contains (among other data not relevant for the security functions defined in this Security target) the following:

Version: 1.1 Classification: Public Page 90 of 114 Last update: 2013-01-18

Name	Description		
GROUPNAME	Name of the group		
OWNER	Owner of the group profile		
SUPGROUP	The profile's superior group		
TERMUACC or NOTERMUACC	The group's Terminal Authorization		
GID	the group's OpenExtension group identifier		

Table 12: RACF group profile

This section maps to the following SFRs:

- FDP_ACC.2(RACF-PSO), FDP_ACC.2(RACF-TSO), FDP_ACC.2(RACF-SYSTEM), and FDP_ACC.2(CP)
- FDP IFC.2(NI), and FDP IFC.2(VIRT)
- FIA ATD.1(HU), and FIA ATD.1(LS)
- FMT_MSA.1(DAC), FMT_MSA.1(LS), and FMT_MSA.1(VIRT-CIFCP)

General Resource Profiles

A general resource profile - also called universal access authority (UACC) - in RACF contains (among other data not relevant for the security functions defined in this Security target) the following:

Name	Description
Profile name	Name of the profile
GENERIC or MODEL or TAPE	indicates if it is a generic, a model or a tape profile
OWNER	Owner of the profile
NOTIFY	The user who is to be notified whenever RACF uses this profile to deny access to a resource
UACC	The universal access authority for the resource protected by the profile
AUDIT	The type of auditing to be performed for the resource protected by the profile
CATEGORY	The security categories to be assigned to the resource protected by the profile
SECLABEL	The security label of the resource protected by the profile
SECLEVEL	The security level of the resource protected by the profile
ACLs	Access control information (see definition below on the content of an individual ACL)

Table 13: RACF resource profile

Attributes within an ACL are:

Version: 1.1 Classification: Public Page 91 of 114 Last update: 2013-01-18

- access type (none, execute, read, update, control, alter)
- user IDs and group IDs allowed for the access type
- conditions of access (among other):
 - WHEN(TERMINAL(terminal-id ...))
 Modifies the access authority. Specifies that the identified users or groups have the specified access authority when logged on to the specified terminal.
 - WHEN(DAYS(day-info))
 - WHEN(TIME(time-info))

UACC applies to all users, whether they are RACF-defined or not. If no access type for a UACC is defined, RACF uses NONE as a user's default universal access authority.

The default security label is "no seclabel specified". This security label causes all MAC access checks to fail for that subject or object.

This section maps to the following SFRs:

- FAU SAR.2
- FAU STG.1
- FDP_ACC.2(RACF-PSO), FDP_ACC.2(RACF-TSO), FDP_ACC.2(RACF-SYSTEM), and FDP_ACC.2(CP)
- FDP IFC.2(LS), and FDP IFC.2(VIRT)
- FIA_ATD.1(HU), and FIA_ATD.1(LS)
- FMT MSA.1(DAC), FMT MSA.1(LS), and FMT MSA.1(VIRT-CIFCP)

7.1.3.3 F.AC.3 - Access control enforcement

A user's authority to access a resource while operating in a RACF-protected system at any time is determined by a combination of these factors:

- User's identity
- User's attributes including group-level attributes
- User's group authorities
- Security classification (in Labeled Security Mode)
- The access authority specified in the resource profile

For printing support, the TOE marks the print output with the label of the user started the print job on the banner and trailer page as well as on the top and bottom of each page.

Data archival and restore allows storing of the meta data for the user data, including associated labels. When restoring data, the archived label is enforced on the restored data set.

This section maps to the following SFRs:

- FAU SAR.2
- FAU_STG.1
- FDP_ACF.1(RACF) and FDP_ACF.1(CP)
- FDP_ETC.2(LS), FDP_ITC.2(LS) for printing and data archival, FPT_TDC.1(LS) for data archival and restore
- FDP_IFF.1(VIRT)
- FDP IFF.2(LS)

Version: 1.1 Classification: Public Page 92 of 114

- FDP ITC.1(LS)
- FMT_MSA.4 (implicitly as no object generation facility is provided by the TOE)

User identity

A z/VM user is identified by an alphanumeric user ID that is associated with the user by RACF. Note, however, that a user need not be an individual. For example, a user ID can be associated with a disconnected service machine. In addition, in many systems today a "user" is equated with a function, rather than an individual. For example, a service bureau customer may comprise several people who submit work as a single user. Their jobs are simply charged to a single account number. From the security standpoint, equating a user ID with anything other than an individual can be undesirable because individual accountability is lost. It is up to the installation, to decide how much individual accountability is required. When defining a user, the administrator assigns a 1- to 8-character user ID. With this user ID, the user logs on to the system (or submits a batch job). When a user attempts to access RACF-protected resources, RACF uses the user ID to determine the user's access to those resources.

A RACF group is normally a collection of users with common access requirements. As such, it is an administrative convenience, because it can simplify the maintenance of access lists in resource profiles. By adding a user to a group, user access is given to all the resources that the group has access to. Likewise, by removing a user from a group, the user is prevented from accessing those resources. Individual users can be connected to any number of groups. Membership and authority in these groups can be used to control the scope of a user's activity. Each user must be assigned (connected) to at least one group (called the user's default group).

User's attributes

The administrator can assign attributes to each RACF-defined user. The attributes determine various extraordinary privileges and restrictions a user has when using the system. Attributes are classified as either user-level attributes (or, simply, user attributes) or group-level attributes. User attributes override DAC and MAC rules (except explicitly stated).

SPECIAL Attribute

A user with the SPECIAL attribute in his user profile is regarded as a system administrator. He can:

- add, delete and modify user, group, DATASET and other profiles
- define RACF general options (except options related to auditing)

Group-SPECIAL

A system administrator can delegate administrative activities to users such that they can administer profiles belonging to a defined group. He does this by assigning such users the group-SPECIAL attribute. Those users have then administrative capabilities within the scope of the group they belong to. Users with the attribute group-SPECIAL cannot define general RACF options using the SETROPTS command (except for the REFRESH GENERIC, REFRESH RACLIST and LIST operands).

AUDITOR Attribute

A user with the AUDITOR attribute can define and modify the audit related options in user, group and resource profiles. This allows him to define which activities are to be recorded in the audit trail. The AUDITOR attribute at the system level gives the user the authority to specify logging options

Version: 1.1 Classification: Public Page 93 of 114

on the ALTUSER, RALTER, SETROPTS, ALTDIR and ALTFILE commands. In addition, the auditor can list auditing information with the LISTGRP, LISTUSER, RLIST, SEARCH, LDIRECT, LFILE, SRDIR, and SRFILE commands and the IRRUT100 utility program.

The user with the AUDITOR attribute can also list the content of any profile and set the system wide audit related options using the SETROPTS command. Those options are:

- AUDIT or NOAUDIT (for each profile class)
- CMDVIOL or NOCMDVIOL
- LOGOPTIONS (for each profile class)
- OPERAUDIT or NOOPERAUDIT
- SAUDIT or NOSAUDIT
- SECLABELAUDIT or NOSECLABELAUDIT (in labeled security mode)
- SECLEVELAUDIT or NOSECLEVELAUDIT (in labeled security mode)

Audit configuration can also be delegated at the group level by giving the group-AUDITOR attribute to a user.

Group-AUDITOR

A user with the group-Auditor attribute can define and modify the audit related options in user, group and resource profiles in his group. The user's authority is limited to profiles that are within the scope of that group.

OPERATIONS Attribute

A user with the system-OPERATIONS attribute has full authorization to all RACF-protected resources in the following classes:

- VMBATCH
- VMCMD
- VMMDISK
- VMNODE
- VMRDR

However specifically configured access control lists for the resources to be accessed and MAC rules have precedence over this attribute.

Group-OPERATIONS

The group-OPERATIONS user's authority is restricted to resources within the scope of the group.

CLAUTH Attribute

A user with the CLAUTH(USER) attribute can add and modify users except for setting or modifying the following attributes:

- SPECIAL or NOSPECIAL
- AUDITOR or NOAUDITOR
- OPERATIONS or NOOPERATIONS

The CLAUTH attribute is assignable on a class-by-class basis; hence it cannot be assigned at the group level.

Version: 1.1 Classification: Public Page 94 of 114

REVOKE attribute

RACF prevents user from entering the system when the user is assigned the REVOKE attribute. The REVOKE attribute can also be assigned on a group level by using the CONNECT command. If the user has the REVOKE attribute for a group, the user cannot enter the system by connecting to that particular group, or access resources as a member of that group. RACF allows specifying a future date for a REVOKE to occur (at both the system and the group level). Also a future date to remove the REVOKE attribute by using the RESUME operand can be specified.

User's group authorities

The administrator can assign a specific level of "group authority" to each user of a group. The group authorities are:

- USE the user can access resources to which the group is authorized to
- CONNECT access rights of USE, and ability of connect other users to the group and assign **USE or CONNECT authorities**
- JOIN access rights of CONNECT, and the ability to define new users and groups and assign any level of group authority. To define new users, the users with JOIN authority must also have the CLAUTH user attribute for the USER class. When a user defines a new group, it becomes a subgroup of the group in which the user has JOIN authority.

Security classification (Labeled security mode)

Label based mandatory access control is supported by z/VM using RACF. User profiles contain a SECLABEL name, which is the name of a profile of the SECLABEL class. This profile contains the security classification consisting of a hierarchical security level and a set of non-hierarchical categories. The values for the levels and the categories can be defined by the administrator. The administrator can then also define resources in the SECLABEL resource class as a combination of one security level and zero or more categories. Such a resource is called a "security label".

The system defines a set of predefined security labels:

- SYSHIGH This label consists of the highest security level and all categories defined for the system.
- This label consists of the lowest security level defined for the system and no categories.
- **SYSNONE**

This is used for resources that need to be excluded from MAC checking. It is used in the evaluated configuration for TCPIP. It must be defined as SYSNONE so that any user can login using telnet. If not defined as SYSNONE, then only users that have the same security label as user TCPIP can log on. It is to be applied only to trusted userids that perform system-wide functions on behalf of all users.

In order for a user to acquire the access rights defined by the security label, the user must be explicitly authorized to access the label. The user's default label is assigned by the security administrator.

The access control enforced by the TOE ensures that users may only read labeled information if their security label dominates the information's label, and that they may only write to labeled information containers if the container's label dominates the subject's.

Classification: Public Page 95 of 114 Version: 1.1 Last update: 2013-01-18

For evaluating RACF access control rules, MAC rules are evaluated prior to DAC rules. When MAC rules deny access, no further evaluation of DAC rules is done. If MAC rules allow access, DAC rules are consulted afterwards to finally decide the access allowance. MAC rules are checked at access time of the object (i.e. in case of a change in MAC rules, changes affect only new access attempts).

During logon, users can select a non-default security label by using the "LOGON userid SECLABEL seclabel" command.

Access authority

The access authority determines to what extent the specified user or group can use the resource. The owner of a profile protecting a general resource (such as a tape volume or terminal) can grant or deny a user or group access to that resource by including the user ID or group ID in the resource profile's access list. Associated with each user ID or group ID is an access authority that determines whether the user or group can access the resource, and if they can access the resource, how they can use it. Access types that may be granted are NONE, READ, UPDATE, CONTROL, and ALTER, which form a hierarchical set of increasing access authorities.

NONE

The specified user or group is not permitted to access the resource or list the profile.

READ

Allows users to access the resource for reading only. (Note that users who can read the minidisk can copy or print it.) For minidisks, link modes R, RR, SR, and ER are permitted.

UPDATE

Allows users to read from, copy from, or write to the resource. For minidisks, link modes W, WR, SW, or EW are permitted in addition to those allowed for READ.

CONTROL

Allows users to read from, copy from, or write to the resource. For minidisks, link modes M, MR, and SM are permitted, in addition to those allowed for UPDATE.

ALTER

Allows user to read from, copy from, or write to the resource. For minidisks, link mode MW is permitted in addition to those allows for CONTROL.

When specified in a discrete profile in a class other than VMMDISK, ALTER allows users to read, alter, and delete the profile itself, including the access list. However, ALTER does not allow users to change the owner of the profile.

When specified in a generic profile or in a discrete profile in the VMMDISK class, ALTER gives users no authority over the profile itself.

In some cases the resource may not implement read-only or read-write capabilities and in such cases, the level of access required to permit use is resource-specific and is documented in the RACF Security Administrator's Guide [RACFSAG].

It is to be noted that MAC rules take precedence over DAC rules in case they contradict each other. DAC rules are checked at access time of the object (i.e. in case of a change in DAC rules, changes affect only new access attempts).

Deferring access control decisions

In case RACF is unable to validate the requested access, RACF notifies CP that it cannot perform the access control decisions. Inability of validating access is possible for RACF in case there is no profile for the calling subject or the requested object. CP validates access based on the directory entries for the calling subject and the requested object

Version: 1.1 Classification: Public Page 96 of 114

In the evaluated configuration, the RACF - CP interface is configured in a way that any deferred operations are automatically and unconditionally denied by CP.

Please note that in case RACF severed the connection to CP due to the audit trail is full, no notification about RACF deferring the access control decision to CP can be made. Therefore, no CP based access control is conducted. This state causes CP to fail any request that requires RACF intervention.

7.1.3.4 F.AC.4 - Access Control Configuration and Management

Management of the access control facility is restricted to users with specific authorities defined in their user profile. The following list shows those authorities:

- SPECIAL Attribute
- **AUDITOR Attribute**
- **CLAUTH Attribute**

System wide configuration of RACF

The system administrator can define system wide-options of RACF with the SETROPTS, SETEVENT and SETRACF commands.

To operate in correspondence with the requirements in this Security Target, the system administrator needs to configure RACF (using the SETROPTS command) with the following options: CATDSNS(FAILURES), NOCOMPATMODE, ERASE(ALL), GENERIC(*), GLOBAL(*), GRPLIST.

This section maps to the following SFRs:

- FMT MSA.1(DAC), FMT MSA.1(LS)
- FMT MSA.3(DAC), FMT MSA.3(LS) •
- FMT MTD.1(IAT), FMT MTD.1(IAF), FMT MTD.1(IAU)
- FMT REV.1(OBJ)
- FMT SMF.1
- FMT SMR.1

7.1.3.5 F.AC.5 - Protected Resources

On z/VM, RACF can be used to control access to all objects with discretionary and with mandatory access control checks.

For the evaluation the protection of the following resource classes is considered:

- Fields in RACF profiles (field-level access checking).
- Global access checking table entry. Fastpath DAC rules for other classes. Only for the SYSLOW security label.
- **GTERMINL** Resource group class for TERMINAL class. See below for terminal class
- Security classification of users and data (security levels and security categories).
- SECLABEL (in Labeled security mode) If security labels are used, and, if so, their definitions.
- **SURROGAT**

Page 97 of 114 Version: 1.1 Classification: Public Last update: 2013-01-18

If surrogate login or access is allowed, and if allowed, which user IDs can act as surrogates.

 TERMINAL Terminals.

7.1.3.6 F.AC.6 - Access control enforcement by CP

In addition to the access control checks performed by RACF as outlined above, CP also provides discretionary access control checks. Access to all CP commands and all DIAGNOSE codes is governed by CP.

Privilege classes

Each CP command and DIAGNOSE code is assigned to a privilege class. The TOE provides predefined privilege classes (A to G) and already assigned all CP commands and DIAGNOSE codes to one of them (privilege class H is reserved by IBM for future use, thus having 8 predefined classes on the system: A through H). DIAGNOSE codes and CP commands assigned to the privilege class any are not subject to CP discretionary access control.

Privilege classes can be redefined by the authorized administrator. Also completely new definitions of privilege classes can be configured. The user class restructure feature provides customers with the ability to control access to commands and DIAGNOSE codes more precisely through customer-defined classes. Customers can use this feature to generate up to 24 self-defined privilege classes in addition to the eight pre-defined classes.

When a virtual machine is defined, the system administrator assigns one of more privilege classes to the virtual machine. When the virtual machine logs on, its *active* set of privileges will be the same as the *defined* set of privileges.

If the SET PRIVCLASS command is enabled by the system administrator, a user can remove privileges from his or her *active* set of privileges. The user may restore the removed privileges to their active set of privileges at any time by again using the SET PRIVCLASS command. Privilege classes that are not in the *defined* set of privileges are not permitted to be added to the *active* set.

Command and DIAGNOSE access check

When a user enters a CP command or executes a DIAGNOSE instruction, CP intercepts the operation and examines the privilege class assigned to the command or the specific code specified on the DIAGNOSE instruction. If that privilege class is currently in the issuing user's *active* set of privilege classes, the command or DIAGNOSE is potentially allowed, subject to any additional protections imposed by RACF (such as is defined for the CP STORE HOST command).

Consistency of access checks between RACF and CP

The access check on those CP commands and DIAGNOSE codes is performed sequentially. First the CP check is performed and then, if the command or DIAGNOSE is defined to have additional RACF checks, RACF is consulted. In case the CP check denies access, no further RACF check is performed. In contrast, if the CP check accepts the request from the user, RACF performs its access check. Only if both access checks succeed, is the request allowed to proceed.

7.1.4 F.I&A: Identification and Authentication

7.1.4.1 F.I&A.1 - Identification and authentication mechanism

Users can interact with the TOE in one of the following ways:

Version: 1.1 Classification: Public Page 98 of 114

- As an operator at a console or via Telnet using Control Program commands
- Using software from inside virtual machines executing DIAGNOSE instructions or processor instructions that cause the SIE instruction to terminate and return the processor control to the CP

In all cases, users must be defined to RACF and are identified and authenticated by a user ID / password combination.

When authenticating a user, RACF will verify:

- If the user is defined in the RACF database. If the user ID is not defined to RACF, the virtual machine cannot be started.
- If the user has supplied a valid password or phrase, and a valid, authorized group name. Otherwise a default group name is selected. Also a security label is associated with the user (in Labeled Security mode). If a user does not have a password defined, then local or telnet logon to the virtual machine console is not permitted.
- If the user ID has the REVOKE attribute, the virtual machine cannot be started.
- If the user's group has the REVOKE attribute, the user cannot enter the system as a member of that particular group, or access resources as a member of that group.

After it has authenticated the user's identity, RACF associates the user with its user attributes and permits CP to create the user's virtual machine.

To "identify a user" means to firmly establish who is using the system to perform a particular act. Every command, DIAGNOSE, and other security-relevant event is directly attributable to a user whose identity has been previously well-established.

If the connection between CP and RACF is severed for any reason, no security-sensitive activities (LOGON, LINK, MESSAGE, etc.) will be permitted, except as described below. The connection can be severed as a result of the RACF server being forcibly removed from the system (CP FORCE), abnormal termination of the RACF service, or due to explicit action by the RACF server itself.

In the evaluated configuration, the RACF server is configured to sever its connection to CP in the event the both audit logs are full. In the event RACF services are unavailable, only select administrative user IDs can login to the system to repair the situation. These user IDs are authenticated using the password maintained in the System Directory (USER DIRECT).

The z/VM Telnet server uses the SCANINTERVAL, INACTIVE and TIMEMARK parameters (as part of the INTERNALCLIENTPARMS statement) to establish a means through which the Telnet server will disconnect a session which is inactive for a configurable number of seconds. This mechanism provides the automated session protection.

The CP DISCONNECT command allows a user to disconnect from the virtual machine terminal. A user would need to reauthenticate before access to the session data is restored.

The SSL server allows the configuration of a bi-directional certificate verification. This mechanism therefore provides the token-based authentication. As the SSL server establishes the communication channel between a remote entity and the CP console, a user still needs to provide his password/passphrase to authenticate with the CP console.

This functionality maps to the following SFRs:

- FTA SSL.1
- FTA SSL.2 lacktrian
- FIA UAU.5

Classification: Public Page 99 of 114 Version: 1.1 Last update: 2013-01-18

7.1.4.2 F.I&A.2 - Passwords

In RACF the user selects his own password and only the user knows his own password. If a password needs to be reset, the security administrator will reset the password. This new password will be in an expired state, thus forcing the user to enter a new password on the first logon. So that self-service security management software can be implemented, RACF also includes the ability to set an *unexpired* password. This is intended for use only by automation software operating on behalf of the end user.

Using the SETROPTS PASSWORD RULES command, a system administrator can define the rules for forming valid passwords. Additional suboptions are provided to enable the administrator to control the maximum lifetime of a password (the change interval) and the number of password changes required before a password may be reused.

If desired, a user can use the PASSWORD command set their password change interval to any value less than the interval set by SETROPTS PASSWORD.

All password change and history policies defined by SETROPTS PASSWORD also apply to password phrases. The syntax requirements for password phrases are contained within the installation-controlled exit routine ICHPWX11.

When a user changes a password, RACF treats the new, user-supplied password as an encryption key to transform the RACF user ID into an encoded form using the DES algorithm that it stores on the database. Neither the clear-text password nor its encrypted form are stored in the RACF database.

The following system wide options can be set to enforce a minimum strength of passwords via the PASSWORD option in the SETROPTS command:

- Minimum and maximum length of passwords (LENGTH(m1:m2) as part of a RULE suboption)
- Maximum password lifetime (INTERVAL suboption)
- Number of passwords from the user's password history that are not allowed for a new password (HISTORY suboption)
- Maximum number of consecutive failed authentication attempts until the REVOKE attribute is set in the user's profile (REVOKE suboption)
- Type of character for each character position of a password. Possible types are:
 - ALPHA
 - ALPHANUM
 - VOWEL
 - NOVOWEL
 - CONSONANT
 - NUMERIC

When the user provides wrong passwords in consecutive authentication attempts, the account status is set to REVOKE by the TSF until the administrator re-enables the account. For accounts with the SPECIAL attribute, the system operator is prompted whether the account status of the offending user shall be set to REVOKE when the limit for consecutive failed authentication attempts is surpassed.

This functionality maps to the following SFRs:

- FIA AFL.1
- FIA SOS.1
- FIA UAU.1

Version: 1.1 Classification: Public Page 100 of 114

- FIA UAU.7
- FIA UID.1
- FIA USB.2

As the identifier for virtual machines is identical to the user identifier, FIA UID.2(VIRT) and FIA USB.1(LS) is also covered by this functionality.

7.1.4.3 F.I&A.3 - Identity Change

During runtime of a virtual machine, an authorized user can switch his identity using the DIAGNOSE 0xD4 instruction. The changed user ID applies to all subsequent access control checks (DAC and MAC) for the LINK command, IUCV connections, and spool file transmission. Using RACF, the administrator is able to limit the target user IDs a particular user can impersonate. This is a privileged (class B) function that is not available to general (class G) users. It is used by trusted virtual machines to do work on behalf of other users.

The BY option of the LOGON command enables a user to logon using his own credentials and assume the identity of another specified user. The administrator must give explicit authority to the user for executing this command.

In Labeled Security Mode: Change of security labels at runtime of a virtual machine is not allowed. For changing the security label, a user has to log off and log on. During the log on process, the user can choose one out of all security labels assigned to this user.

This functionality maps to the following SFRs:

- FIA USB.1(LS)
- FIA USB.2

7.1.5 F.IP: Interference Protection between virtual machines

The TOE provides a strict separation functionality for ensuring confidentiality and integrity between virtual machines to the extend of specifically configured communication channels.

For maintenance of integrity and separation of virtual machines, z/VM exploits the z/Architecture architecture in several other ways:

- The addresses in a virtual machine are virtual addresses. They have no meaning outside the virtual machine in which they are generated and used. Whenever required, these virtual addresses are translated into real addresses by ART (access register translation) and DAT (dynamic address translation), for the address space referenced by the user. Using ART and DAT, the system keeps these address spaces absolutely separate from one another. This means that it is impossible for one user to access an address space of another user unless the owner allows the other user to do so.
- z/VM translates the addresses in all channel programs, except those initiated by DIAGNOSE X'98'. Channel programs are programs built and run by virtual machines that request peripheral devices to perform input and output tasks. For unassisted I/O operations, z/VM performs the I/O on behalf of the virtual machine. If the I/O is assisted by the PR/SM firmware, the I/O is handled by the firmware without interception by CP.
- Every z/VM virtual machine runs in interpretive-execution mode which processes most privileged and non-privileged instructions and handles virtual storage address translation without requiring intervention of z/VM (see section 1.5.1.1 for details).

Classification: Public Page 101 of 114 Version: 1.1 Last update: 2013-01-18

z/VM uses page protection to prevent read-only saved segments from being modified. A
saved segment is a block of data or re-entrant code in virtual, shared storage that many
users can share simultaneously. However, if a user has a legitimate reason for wanting to
change a read-only saved segment, the user must specifically request an exclusive copy
of the saved segment and be authorized to do so in the system user directory. The
unmodified code remains shared among the other virtual machines.

Devices with DMA access are accessed by virtual machines by mapping the DMA memory area into the virtual machine's memory. The mapping is enforced by CP upon initialization of the virtual machine during login of a user.

CP enforces a strict separation of the virtual machines. To accomplish this, CP ensures:

- Virtual machines can only access memory that is mapped to page frames in real memory. The mapping is controlled by CP and is not accessible by the virtual machine. Memory references by the virtual machine to pages not contained of the virtual machine's memory configuration (as defined in the System Directory) will result in an addressing exception program interrupt. References to pages that are defined, but which do not exist or that have been swapped out will be resolved by CP and the operation retried.
 - CP verifies upon initialization of a virtual machine and during allocation of memory during operation of virtual machines that no memory overlaps are present between virtual machines except those explicitly configured. A similar check is performed when virtual machine memory is resized during runtime of the virtual machine.
- CP provides only configured processor resources to virtual machines by virtualizing and simulating the number of logical processors configured for each virtual machine. CP also ensures that logical processors are scheduled according their configured processing power on real processors. No virtual machine instruction can block scheduling of logical processors.

Supported by the underlying processor, the TOE restricts results of software failures (such as program checks or virtual machine checks) occurring in a virtual machine to this machine, thus not affecting other virtual machines or the CP.

Memory as well as DASD devices and their derived devices (such as minidisks) can be configured to be shared among virtual machines. The administrator can configure sharing of devices for a subset of virtual machines. Also, the administrator can configure access of virtual machines consoles from other virtual machines using the single console image facility (SCIF) or by allowing the CP SET SECUSER command. The TOE ensures that sharing objects between virtual machines are limited to these objects, hence they are allowed in an evaluated configuration. The administrator has to ensure that shared configurations are in line with the organizational rules.

It is to be noted that specific communication channels can be established between virtual machines that are capable of transporting interference from one virtual machine to another. Interference transmitted through these communication channels are not covered by this security function. However, the TOE ensures that all communication channels can only be used within the boundary of their definition. The following table presents all possible communication channels and defines the boundary the channel is subject to. This table includes communication channels between a virtual machine and the Control Program.

Communication channel	Boundary
Guest LAN	DAC / MAC enforcement
Virtual Switch	Multidirectional channel between all configured virtual machines

Version: 1.1 Classification: Public Page 102 of 114

Last update: 2013-01-18

Communication channel	Boundary		
VMCF	MAC enforcement bidirectional channel between two configured virtual machines		
IUCV	DAC / MAC enforcement bidirectional channel between two configured virtual machines		
CP commands MESSAGE (MSG), SMSG, and WARNING (WNG), MSGNOH	MAC enforcement unidirectional channel between two configured virtual machines		
VCTC	DAC / MAC enforcement bidirectional channel between two configured virtual machines		
Spool files	DAC / MAC enforcement transferring spool files between virtual machines		
AUTOLOG	MAC enforcement Providing of initial console data to virtual machine		
XAUTOLOG	DAC / MAC enforcement Providing of initial console data to virtual machine		
SET SECUSER	Command is disabled when MAC checking is activated by activating the SECLABEL class. In that case, only the system administrator can set the secondary user by usin the CONSOLE statement in the user directory. Enable read and write access to a virtual machine console		
SET OBSERVER	Command is disabled when MAC checking is activated by activating the SECLABEL class. In that case, only the system administrator can set the secondary user by using the CONSOLE statement in the user directory. Enable read access to a virtual console		
Minidisks	DAC / MAC enforcement configured minidisks are shared		
Memory	DAC / MAC enforcement configured memory range is shared		

Table 14: Communication channel usage

This section maps to the following SFRs:

- FDP_IFC.2(VIRT) and FDP_IFF.1(VIRT)
- FIA_UID.2(VIRT) as each virtual machine is assigned with the unique user identifier that is maintained by CP

Version: 1.1 Classification: Public Page 103 of 114 Last update: 2013-01-18

7.1.5.1 Access to virtual machines

The TOE provides access to the virtual machine's consoles as well as to the virtual machine's CP command line after the user has identified and authenticated. Remote access to the console and the CP command line is provided with the TCP/IP server application executing in its own virtual machine. That TCP/IP server implements a Telnet server that provides the connection between the virtual machine console or virtual machine CP command line and the remote entity.

To separate different concurrent Telnet connections, the TCP/IP application (which includes the Telnet server) maintains TCP/IP sessions by exploiting the TCP protocol immanent sequence and acknowledge numbers. The Telnet server uses these maintained sessions to connect each individual Telnet connection with the virtual console where the session-initial identification and authentication of the user was performed. The Diagnose code X'08' is being used by the Telnet application to access the virtual console facility of CP.

This section maps to the following SFRs:

FDP ETC.2(VIRT) and FDP ITC.2(VIRT)

The TOE also provides an SSL server operating again in a separate virtual machine that implements the SSL protocol, including the initial handshake, as well as the encryption and decryption of data.

The TCP/IP server utilizes the SSL server when it detects SSL traffic. When an SSL handshake request is detected, the TCP/IP server forwards the request to the SSL server to process the handshake and to generate the replies. The TCP/IP server submits the handshake replies to establish an SSL tunnel.

Subsequently, any SSL traffic received by the TCP/IP server is forwarded to the SSL server for decryption. When data is supposed to be send to the remote peer, the TCP/IP server hands the data to the SSL server for encryption, obtains the encrypted data and forwards the data to the remote entity.

To facilitate the SSL protocol, the SSL server is able to generate random numbers to generate the SSL pre-master secret as well as the RSA and DSA keys. In addition, the SSL server implements the cryptographic primitives needed for the SSL protocol.

The random numbers required for the the cryptographic operations of the SSL protocol is delivered with a FIPS 186-2 compliant RNG that is seeded with 160 bits of entropy.

This section maps to the following SFRs:

- FCS CKM.1(SYM), FCS CKM.1(RSA), FCS CKM.1(DSA)
- FCS CKM.2(NET)
- FCS CKM.4
- FCS COP.1(NET)
- FCS RNG.1
- FTP ITC.1

7.1.5.2 Virtual machine networking

CP allows virtual machines to communicate as part of virtual networks maintained by CP as well as to communicate with external entities. CP assigns each virtual machine an IP address that can be used by external entities to communicate with the virtual machine.

Classification: Public Version: 1.1 Page 104 of 114 Last update: 2013-01-18

In addition, CP can restrict network communication based on VLAN tags. Each guest can be associated with a VLAN tag where the TOE maintains the VLAN to virtual machine mapping configuration. Only if the VLAN tag present in the IP packet matches the VLAN tag of a virtual machine, the packet is forwarded.

For communication originating by virtual machines, CP ensures that the proper VLAN tag is added to each outgoing packet.

If no VLAN tags or communication restrictions based on VLAN tags are configured for a virtual machine, that virtual machine is not subject to any communication restriction.

This section maps to the following SFRs:

- FIA ATD.1(TU)
- FDP IFC.2(NI) and FDP IFF.1(NI)
- FDP_ITC.2(BA) (to ensure that data intended for one user is sent to that user's virtual machine) and FPT TDC.1(BA)
- FMT MSA.3(NI)
- FPT_TDC.1(VIRT)

7.1.6 F.OR: Object re-use

Reuse of protected objects and of storage is handled by various software controls, and by administrative practices.

Subject to object reuse enforced by the TOE are:

- Memory ranges cleared upon reallocation to other virtual machines.
- All registers are reassigned since all virtual machines have the same architected registers. The registers are not cleared, however they cannot, by definition, retain any residual data since all registers are reloaded each time a virtual CPU is dispatched.
- Temporary disk space is cleared automatically when the FEATURES ENABLE CLEAR_TDISK option is specified in the system configuration.

Clearing of minidisks, and other DASD volumes must be carried out by the administrator in accordance with organizational policies. Additional software facilities may be used to support this task, but they are not part of this evaluation.

Therefore, subject to object reuse implemented by organizational rules is:

- Clearing of disk storage space used to contain minidisks prior to allocation to a virtual machine,
- Clearing of temporary disk space prior to re-allocation to another virtual machine,
- Erasure of reusable removable media such as tapes prior to re-assignment to another user.

This section maps to the following SFRs:

- FDP RIP.2
- FDP RIP.3

7.1.7 F.SM: Security Management

The TOE allows the management of security functions by trusted users to alter the behavior of security functions and other functions to organizational needs. The following security functions can be managed:

Version: 1.1 Classification: Public Page 105 of 114

- Management of object security attributes, including discretionary access control and (in Labeled Security Mode) of security labels for mandatory access control
- Management of the audit trail and the events to be audited (FAU SEL.1 and FMT MTD.1(AE), FMT MTD.1(AS), FMT MTD.1(AT), FMT MTD.1(AF))
- Management of user security attributes, including authentication data and access control (FMT MTD.1(IAT), FMT MTD.1(IAF), FMT MTD.1(IAU), FMT REV.1(USR))
- Management of VLAN to virtual machine mappings (FMT MTD.1(NI))
- Management of virtual machine resource assignments (FMT MSA.3(VIRT-CIFCP) and FMT MTD.1(VIRT-COMP))

For carrying out security management, the TOE maintains different roles for users. Such user roles depend on the following authorizations:

- Authorization to access and modify objects based on DAC and MAC
- Authorization to access and modify objects based on attributes (such as SPECIAL or RACF AUDITOR)

This and the following sections explain the authorizations needed for performing administrative tasks and cover therefore FMT_SMF.1, FMT_SMR.1.

7.1.7.1 F.SM.1 - Management of user security attributes

RACF manages the database holding various security attributes assigned to a user. On z/VM, authorized users can enter RACF commands by preceding the command name with RAC, by entering a RACF command session, or by use of RACF ISPF panels. The ISPF panels provide an interactive, menu driven user interface.

By using the aforementioned interfaces, authorized users can manage users and groups. User management includes:

- Assignment of IDs to usernames
- Assignment of hardware components to users
- Assignment of user profiles to users
- Assignment of attributes (SPECIAL, AUDITOR, OPERATIONS, CLAUTH, REVOKE) to users
- Assignment of a default universal access authority (UACC) of NONE, READ, UPDATE, CONTROL, or ALTER when being connected to a group. RACF uses this default UACC for all new resources a user defines while connected to the specified default group. When a user issues the ADDDIR, ADDFILE, or RDEFINE command to define a new general resource profile and does not specify a value for the UACC operand, RACF uses the default UACC as the UACC for the profile unless a value for UACC is specified in the class descriptor table.
- Assignment of security levels or security labels (a combination of security levels and security categories) (in Labeled Security Mode)

Other user attributes can be set as well.

Group management includes:

- Defining of groups (or group profiles)
- Assignment of the group's superior group (the predefined group SYS1 is the only group having no superior)
- Assignment of the owner of the group

Classification: Public Page 106 of 114 Version: 1.1 Last update: 2013-01-18

7.1.7.2 F.SM.2 - Management of object security attributes

Similar to the management of user security attributes, object security attributes can be managed by authorized users through the two available user interfaces (command line and RACF ISPF panels).

Each object can be assigned to a resource profile with RACF.

The following information can be managed for objects:

- Assignment to a general resource classes (such as TERMINAL)
- Assignment to a generic (this profile may cover more than one object) or a discrete (this profile covers only one object) profile name
- Assignment of an universal access authority (UACC NONE, READ, UPDATE, CONTROL, ALTER) for users who are not otherwise restricted
- Assignment of a user or group as owner of the resource profile
- Assignment of security levels and categories (or assignment of security labels, which cause security levels and categories to be ignored during access check). (Labeled Security Mode)

7.1.7.3 F.SM.3 - Management of audit

The management of the audit facility can only be performed by users having the AUDITOR attribute, or who belong to a group with the group-AUDITOR attribute. As an exemption, owners of resource profiles can configure RACF to log access attempts to resources protected by the profile (AUDIT operand).

RACF can be configured to audit the following events:

- Changes to any RACF profiles
- All RACF commands that a SPECIAL or group-SPECIAL user issues
- All unauthorized attempts to use RACF commands
- Selected z/VM events, using the SETEVENT command
- All RACF-related activities of specific users
- All accesses to resources (minidisks and general resources) that RACF allows because the user has the OPERATIONS or group-OPERATIONS attribute
- All accesses to specific minidisks
- All accesses to specific general resources
- All accesses to resources protected by specific profiles in the SECLABEL class (Labeled Security Mode)
- All accesses to a specified class of resources at an access level indicated on the LOGOPTIONS keyword of the SETROPTS command

Similar to the configuration of object and user attributes, the audit facility can be configured either using RACF commands or ISPF panels.

The TOE maintains a reliable clock synchronized with the clock from the underlying abstract machine used to generate time stamps as required for the TOE itself and applications. The audit subsystem requires such a reliable time source for the date and time field in the header of each audit record. The clock uses timers provided by the hardware and interrupt routines that update the value of the clock maintained by the TOE.

Page 107 of 114 Version: 1.1 Classification: Public Last update: 2013-01-18

The initial value for this clock may be provided by a hardware clock that is part of the underlying abstract machine, or by the system administrator setting the initial value. Only the system administrator is allowed to overwrite the value of the clock maintained by the TOE at IPL time (e. g, to correct the value in case it has drifted over time due to some inaccuracy of the hardware timer used by the TOE).

7.1.7.4 F.SM.4 - Management of system assurance testing

To perform the system assurance testing, the abstract machine has to be brought into its maintenance mode and the test application has to be started.

The test application is the System Assurance Kernel that tests whether the abstract machine conforms to the z/Architecture Principles of Operation specification.

7.1.8 F.TP: TOE Self Protection

7.1.8.1 F.TP.1 - Supporting Mechanisms of the Abstract Machine

The following section provides a short overview of the supporting protection mechanisms of the abstract machine z/VM is executing on. The purpose of this section is to better understand how z/VM uses those mechanisms to protect itself against tampering and bypassing of the security functions of z/VM.

The z/VM control program system integrity is defined as the inability of any program running in a virtual machine not authorized by a z/VM Control Program mechanism under the customer's control or a guest operating system mechanism under the customer's control to:

- Circumvent or disable the Control Program's memory protection mechanisms,
- Circumvent or disable minidisk protection mechanisms,
- Access a resource protected by RACF to which the virtual machine is not authorized,
- Access a virtual machine using a CP-managed passwords (except when the system is being operated in recovery mode)
- Obtain control outside the SIE environment or with privilege class authority or directory capabilities greater than those it was assigned. This refers to those directory options that control functions intended to be restricted by specific assignment, such as those that permit system integrity controls to be bypassed or those not intended to be generally granted to unprivileged or untrusted users.
- Circumvent the system integrity of any guest operating system that itself has system integrity as the result of an operation by any z/VM control program facility.

Processor Features

TSF protection is based on the protection mechanisms provided by the underlying abstract machine:

- Start Interpretive-Execution (SIE) instruction of the processor
- Access register translation (ART) and dynamic address translation (DAT) facilities provided by the processor

The SIE instruction provided by the processor is the central facility the TOE manages. It is called by the Control Program (CP) restricting the scope of the processor to a limited memory range to set up a virtual machine environment. If the processor enforcing a SIE environment is instructed to execute predefined privileged instructions, the SIE environment is terminated and control is

Classification: Public Page 108 of 114 Version: 1.1 Last update: 2013-01-18

returned to CP. This SIE instruction is executed with a CP-managed timer to allow scheduling of virtual processors (processors visible from inside a virtual machine) and CP execution time on logical processors.

The primary input to the SIE instruction is the SIE Descriptor. It contains a variety of architectural information about the virtual processor, including the Program Status Word and the location of the address translation tables used by SIE.

Access register translation (ART) and dynamic address translation (DAT) protect resident memory objects, whether that memory is shared or exclusive to a single user. ART and DAT are hardware facilities used by the machine during the execution of any instruction to translate a virtual address into the corresponding real address. The system depends on ART and DAT to provide secure, separate address spaces for each virtual machine in the system. This means that it is impossible for one user to access an address space of another user, or the Control Program, unless its owner allows the other user to do so.

In the System z processor, execution of code is driven by the Program Status Word (PSW). The PSW holds, among other things, the results of the most recently executed instruction (the condition code) and information about the next instruction to be run.

When a virtual machine issues an instruction that exits the SIE environment, the processor stores the current PSW and other information about the status of the virtual machine into the SIE descriptor and the processor executes the instruction immediately following the SIE instruction. CP examines the reason for the exit from SIE and responds appropriately.

TOE procedures

The TOE's address space management ensures the strict separation of memory assigned to virtual machines and enforced by the SIE environment.

The TOE's scheduling management ensures the operation of multiple logical processors and CP execution time on top of multiple physical processors.

Access to system services (e.g. via a DIAGNOSE instruction) is controlled by the system, which requires subjects who wish to perform security relevant tasks to be appropriately authorized.

Abstract Machine Modes of Operation

z/VM executes within a logical partition. The Control Program (CP) full control to all the resources allocated to the partition when it has been set up on the hardware management console (HMC). The logical partitioning software (PR/SM) starts the processors allocated to a partition in the "interpretative execution" mode using the SIE instruction. Each processor is then "confined" into the boundaries specified for the logical partition with respect to the physical memory and the peripheral devices it can access. Whenever a resource "virtualized" by PR/SM is accessed by an instruction on a processor, the processor breaks out of the interpretative environment into the PR/SM code, which then services the request in accordance with its own policy. For z/VM this operation is transparent. PR/SM is part of the TOE environment that provides the abstract machine for the operation. PR/SM has been evaluated separately.

7.1.8.2 F.TP.2 - Structure of the TOE

The trusted parts of z/VM consist of

- the Control Program kernel
- authorized applications

Classification: Public Page 109 of 114 Version: 1.1 Last update: 2013-01-18

The z/VM kernel contains the functions invoked either by a CP command, a DIAGNOSE instruction or by terminating the SIE instruction and returning control over the processor back to CP. Those functions start to operate in supervisor state outside the SIE environment with a storage key mask of zero in the PSW. They may change their storage key mask in the PSW (e. g. when checking user operands) but as long as they execute in supervisor state they may set their storage key mask back to zero at any time.

In addition to the Control Program, z/VM has a number of "authorized applications" that need to be trusted since they are granted access to specifically restricted interfaces provided by CP. Using these interfaces, applications may override or modify security policies defined in this Security Target and may implement security functionality. A trusted application establishes a bidirectional communication channel with CP.

There are two authorized applications belonging to the TOE, which run in dedicated virtual machines: the RACF security server and the TCP/IP stack.

In order to trust the virtual machine(s) running an instance of RACF (it is possible to run multiple instances of RACF for one z/VM instance), the Control Program must be modified. When RACF is enabled, the CP kernel is rebuilt by the system service tools to include:

- A list of all user IDs that are planned to run an instance of RACF that CP will use and trust.
- RACF modifications to enable the CP Access Control Interface (ACI). The ACI is the mechanism used by CP to detect the presence of a security product (RACF) and to communicate with it. This includes enablement of the *RPI IUCV system service used by the RACF server to establish a bidirectional connection with CP. Using this connection, CP sends requests to RACF and receives responses.

The TCP/IP does not modifications to CP. However, to run the TCP/IP stack (and optionally the Telnet service), the virtual machine running the TCP/IP stack application must have access to at least one network device.

Protection of Trusted Applications

Certain applications need to be trusted by CP since they implement part of the security functionality provided by the TOE. Trusted applications therefore must be carefully protected from unauthorized modification and the system must be protected from adding authorized applications other than those allowed in the evaluated configuration. The protection of the trusted application is done by the strict separation of the virtual machines implemented by CP. Each trusted application is running inside a virtual machine on top of the operating system CMS.

Trusted and non-trusted applications are characterized in section 1.5.4.1.

Version: 1.1 Classification: Public Page 110 of 114 Last update: 2013-01-18

8 Abbreviations, Terminology and References

8.1 Abbreviations

CC

Common Criteria

CP

Control Program

DAC

Discretionary Access Control

IPL

Initial Program Load

MAC

Mandatory Access Control

PSW

Program Status Word

PR/SM

Processor Resource/Systems Manager™

RACF

Resource Access Control Facility

TOE

Target of Evaluation

TSP

TOE Security Policy

8.2 Terminology

This section contains definitions of technical terms that are used with a meaning specific to this document. Terms defined in the [CC] are not reiterated here, unless stated otherwise.

Access

If an authorized user (virtual machine) is granted a request to operate on an object, the user is said to have *access* to that object. Access rights determine whether the user can update or only read the object, and whether the user has shared or exclusive access to the object.

Access Control Policy

A set of rules used to *mediate user access* to TOE-protected objects. Access control policies consist of two types of rules: *access rules*, which apply to the behavior of *authorized users*, and *authorization rules*, which apply to the behavior of *authorized administrators*.

Authorization

Last update: 2013-01-18

If an *authorized administrator* is granted a requested service, the *user* is said to have *authorization* to the requested service or object. There are numerous possible authorizations. Typical authorizations include auditor authorization, which allows an administrator to view audit records and execute audit tools, and DAC override authorization, which allows an administrator to override object access controls to administer the system.

Version: 1.1 Classification: Public Page 111 of 114

Authorized Administrator

An *authorized user* who has been granted the authority to manage the TOE. Authorized administrators are expected to use this authority only in the manner prescribed by the guidance that is given to them.

Authorized User

A *user* who has been properly defined, identified, and authenticated to the Control Program (CP) and RACF. Authorized users are considered to be legitimate *users* of the TOE.

Category

See security category.

Classification (MLS)

A hierarchical designation for data that represents the sensitivity of the information. The equivalent IBM term is *security level*.

Control Program (IBM)

The Control Program provides the kernel or nucleus of z/VM running in supervisor state outside the SIE instruction environment. It controls and manages the SIE instruction provided by the underlying processor providing a restricted computing environment for the virtual machines.

Discretionary Access Control (DAC)

An access control policy that allows authorized users and authorized administrators to control access to objects based on individual user identity or membership in a group (PROJECTA, for example).

Logical Processor (IBM)

A logical processor is a share of a *real processor* that is used by a logical partition (LPAR). Logical processors have the same behavior as *real processors*, but may "float" among the available *real processors*. The point-in-time mapping of a local processor to a *real processor* is managed by the PR/SM LPAR hypervisor which can overcommit the available CPU capacity, making LPARs wait for access to the CPU. This means that the total number of logical processors can exceed the number of *real processors*.

Mandatory Access Control (MAC)

An access control policy that determines access based on the sensitivity (SECRET, for example) or category (PERSONNEL or MEDICAL, for example) of the information being accessed and the access authority of the user attempting to access that information.

Mediation

When access control policy rules (both DAC and MAC) are invoked, the TOE is said to be mediating access to TOE-protected objects.

Real Processor (IBM)

A real processor is a processor that is physically installed in the server and configured to be usable by a logical partition.

SECLABEL

See security label.

SECLEVEL

See security level (IBM).

Security Category (IBM)

When assigned to an object, it identifies the type of information that may be held by the object. When assigned to a user, it identifies the types of information the subject is authorized to access.

Version: 1.1 Classification: Public Page 112 of 114

Security Label (IBM)

A name that represents the combination of a hierarchical level of *classification* (*IBM security level*) and a set of non-hierarchical categories (*security category*). Security labels are used as the base for *mandatory access control* decisions. Security labels are sometimes referred to as *SECLABELs*.

Security Level (IBM)

A numerical value that represents the relative sensitivity of the information an object contains or that a user is permitted to access. A higher number represents a higher level of sensitivity. Security levels are sometimes referred to as *SECLEVELs*. The equivalent MLS term is *classification*.

Security Level (MLS policy in the Bell-LaPadula model)

The combination of a hierarchical classification (called *security level* in z/VM) and a set of non-hierarchical categories that represents the sensitivity of information is known as the security level.

The equivalent term in other IBM documentation is security label.

Sensitivity Label

A specific marking attached to subjects or objects that indicates the *security level*. The equivalent to this MLS term in other IBM documentation is *security label*.

User

A named virtual machine (virtual server) attempting to access or invoke a service offered by the TOE.

8.3 References

CC	Common Criter	ia for Informatio	on Technolog	gy Securit	y Evaluation
----	---------------	-------------------	--------------	------------	--------------

Version 3.1R3 Date July 2009

Location http://www.commoncriteriaportal.org/files/ccfiles/CC

PART1V3.1R3.pdf

Location http://www.commoncriteriaportal.org/files/ccfiles/CC

PART2V3.1R3.pdf

Location http://www.commoncriteriaportal.org/files/ccfiles/CC

PART3V3.1R3.pdf

OSPP Operating System Protection Profile (with exception of SFR FCS RNG.1,

which is superseded by FCS RNG.1 in section 5.1)

Version 2.0

Date 2010-06-01

Location https://www.bsi.bund.de/cae/servlet/contentblob/1098082/publi

cationFile/88584/pp0067b_pdf.pdf

OSPP-LS OSPP Extended Package - Labeled Security

Version 2.0

Date 2010-05-28

Location https://www.bsi.bund.de/cae/servlet/contentblob/1098148/publi

cationFile/88582/pp0067 EP zip.zip

Version: 1.1 Classification: Public Page 113 of 114

OSPP-VIRT **OSPP Extended Package - Virtualization**

Version 2.0

Date 2010-05-28

Location https://www.bsi.bund.de/cae/servlet/contentblob/1098148/publi

cationFile/88582/pp0067 EP zip.zip

RACFSAG Resource Access Control Facility Security Administrator's Guide

Version SA22-7683-14 Date July 2010

Location http://publibz.boulder.ibm.com/epubs/pdf/ichza7b0.pdf

SCG Secure Configuration Guide

Version SC24-6230-02 Date March 2012

SSLv3 The SSL Protocol Version 3.0

Author(s) Transport Layer Security Working Group, Alan O. Freier (Netscape

Communications), Philip Karlton (Netscape Communications),

Paul C. Kocher (Independent Consultant)

Version 3.02

Date 1996-11-18 File name draft302.txt

TLSv1 The TLS Protocol Version 1.0

Author(s) Network Working Group, T. Dierks (Certicom), C. Allen (Certicom)

Version 1.0

Date January 1999 File name rfc2246.pdf

TLSv1.1 The Transport Layer Security (TLS) Protocol Version 1.1

Author(s) Network Working Group, T. Dierks, E. Rescorla (RTFM, Inc.)

Version 1.1

Last update: 2013-01-18

Date April 2006 File name rfc4346.pdf