



Certification Report

NXP JCOP on SN100.C25 Secure Element

Sponsor and developer: NXP Semiconductors GmbH

Business Unit Security and Connectivity

Troplowitzstrasse 20 22529 Hamburg

Germany

Brightsight Evaluation facility:

Brassersplein 2 2612 CT Delft The Netherlands

NSCIB-CC-195714-CR2 Report number:

Report version:

Project number: 195714

Author(s): **Wouter Slegers**

Date: 10 December 2019

Number of pages: 15

Number of appendices:

Reproduction of this report is authorized provided the report is reproduced in its entirety.

The Netherlands

The Netherlands

info@nl.tuv.com

Certificate

Standard Common Criteria for Information Technology Security Evaluation (CC),

Version 3.1 Revision 5 (ISO/IEC 15408)

Certificate number CC-19-195714/2

TÜV Rheinland Nederland B.V. certifies:

Certificate holder

and developer

NXP Semiconductors GmbH

Business Unit Security and Connectivity
Troplowitzstrasse 20, 22529 Hamburg, Germany

Product and assurance level

NXP JCOP on SN100.C25 Secure Element

Assurance Package:

 EAL5 augmented with AVA_VAN.5, ALC_DVS.2, ASE_TSS.2 and ALC_FLR.1

Protection Profile Conformance:

 Java Card Protection Profile – Open Configuration, Version 3.0.5, December 2017 (BSI-CC-PP-0099-2017).

Project number

195714


Evaluation facility

Brightsight BV located in Delft, the Netherlands



Common Criteria Recognition
Arrangement for components
up to EAL2

Applying the Common Methodology for Information Technology Security Evaluation (CEM), Version 3.1 Revision 5 (ISO/IEC 18045)





SOGIS Mutual Recognition Agreement for components up to EAL7

Validity

Date of 1st issue

: 13-03-2019

Date of 2nd issue

: 09-12-2019

Certificate expiry

: 13-03-2024

PRODUCTS
RVA CO78
Accredited by the Dutch
Council for Accreditation

R. de Jobge, Managing director TÜV Rheinland Nederland B.V. Westervoortsedijk 73, 6827 AV Amhem P.O. Box 2220, NL-6802 CE Arnhem The Netherlands





CONTENTS:

Foreword	4
Recognition of the certificate	5
International recognition	5
European recognition	5
1 Executive Summary	6
2 Certification Results	8
2.1 Identification of Target of Evaluation	8
2.2 Security Policy	8
2.3 Assumptions and Clarification of Scope	9
2.4 Architectural Information	9
2.5 Documentation	10
2.6 IT Product Testing	10
2.7 Re-used evaluation results	12
2.8 Evaluated Configuration	12
2.9 Results of the Evaluation	12
2.10 Comments/Recommendations	13
3 Security Target	14
4 Definitions	14
5 Bibliography	15



Foreword

The Netherlands Scheme for Certification in the Area of IT Security (NSCIB) provides a third-party evaluation and certification service for determining the trustworthiness of Information Technology (IT) security products. Under this NSCIB, TÜV Rheinland Nederland B.V. has the task of issuing certificates for IT security products, as well as for protection profiles and sites.

Part of the procedure is the technical examination (evaluation) of the product, protection profile or site according to the Common Criteria assessment guidelines published by the NSCIB. Evaluations are performed by an IT Security Evaluation Facility (ITSEF) under the oversight of the NSCIB Certification Body, which is operated by TÜV Rheinland Nederland B.V. in cooperation with the Ministry of the Interior and Kingdom Relations.

An ITSEF in the Netherlands is a commercial facility that has been licensed by TÜV Rheinland Nederland B.V. to perform Common Criteria evaluations; a significant requirement for such a license is accreditation to the requirements of ISO Standard 17025 "General requirements for the accreditation of calibration and testing laboratories".

By awarding a Common Criteria certificate, TÜV Rheinland Nederland B.V. asserts that the product or site complies with the security requirements specified in the associated (site) security target, or that the protection profile (PP) complies with the requirements for PP evaluation specified in the Common Criteria for Information Security Evaluation. A (site) security target is a requirements specification document that defines the scope of the evaluation activities.

The consumer should review the (site) security target or protection profile, in addition to this certification report, in order to gain an understanding of any assumptions made during the evaluation, the IT product's intended environment, its security requirements, and the level of confidence (i.e., the evaluation assurance level) that the product or site satisfies the security requirements stated in the (site) security target.

Reproduction of this report is authorized provided the report is reproduced in its entirety.



Recognition of the certificate

Presence of the Common Criteria Recognition Arrangement and SOG-IS logos on the certificate indicates that this certificate is issued in accordance with the provisions of the CCRA and the SOG-IS agreement and will be recognised by the participating nations.

International recognition

The CCRA has been signed by the Netherlands in May 2000 and provides mutual recognition of certificates based on the CC. Starting September 2014 the CCRA has been updated to provide mutual recognition of certificates based on cPPs (exact use) or STs with evaluation assurance components up to and including EAL2+ALC_FLR. The current list of signatory nations and approved certification schemes can be found on: http://www.commoncriteriaportal.org.

European recognition

The European SOGIS-Mutual Recognition Agreement (SOGIS-MRA) version 3 effective from April 2010 provides mutual recognition of Common Criteria and ITSEC certificates at a basic evaluation level for all products. A higher recognition level for evaluation levels beyond EAL4 (resp. E3-basic) is provided for products related to specific technical domains. This agreement was initially signed by Finland, France, Germany, The Netherlands, Norway, Spain, Sweden and the United Kingdom. Italy joined the SOGIS-MRA in December 2010. The current list of signatory nations, approved certification schemes and the list of technical domains for which the higher recognition applies can be found on: http://www.sogisportal.eu.



1 Executive Summary

This Certification Report states the outcome of the Common Criteria security evaluation of the NXP JCOP on SN100.C25 Secure Element. The developer of the NXP JCOP on SN100.C25 Secure Element is NXP Semiconductors GmbH located in Hamburg, Germany and they also act as the sponsor of the evaluation and certification. A Certification Report is intended to assist prospective consumers when judging the suitability of the IT security properties of the product for their particular requirements.

The TOE consists of the certified embedded Secure Element (eSE), including an associated Crypto Library and Security Software, and a software stack (JCOP) which is stored and executed on the eSE. The Secure Element is embedded in a micro-controller which also includes an Integrated NFC controller and a System Mailbox which provides the communication interface for the TOE, The TOE provides Java Card 3.0.4 functionality with post-issuance applet loading, card content management and secure channel features as specified in Global Platform 2.2.1.

It includes also NXP proprietary functionalities: Config Applet, OS Update Component, Applet Migration, Restricted Mode and Error Detection Code (EDC) API.

Cryptographic functionality includes 3DES, AES, RSA and RSA CRT; SHA-1, SHA-224, SHA-256, SHA-384, SHA-512 hash algorithms, HMAC, ECC over GF(p), Twisted Edwards Curve 25519 for signature generation and verification (EdDSA), Diffie-Hellman Key Exchange on Montgomery Curve (25519). Furthermore, the TOE provides random number generation according to class DRG.3 of AIS 20.

Note that proprietary applications have been included in the TOE, but as there are no security claims on these functionalities, these application functionality has not been assessed, only the self-protection of the TSF.

The TOE has been originally evaluated by Brightsight B.V. located in Delft, The Netherlands and was certified on 13 March 2019. The re-evaluation also took place by Brightsight B.V. and was completed on December 6, 2019 with the approval of the ETR. The (re-)certification procedure has been conducted in accordance with the provisions of the Netherlands Scheme for Certification in the Area of IT Security [NSCIB].

This second issue of the Certification Report is a result of a "recertification with major changes".

The major changes are the inclusion of the JCOP 6.0 variant and associated guidance, and renaming the TOE from "JCOP 5.0 on SN100.C25 Secure Element" to "JCOP on SN100.C25 Secure Element". The underlying hardware platform has been recertified to include an additional variant (C58), but the variant used for this TOE (C25) has not changed. The impact of the changed guidance for the hardware platform as well as the removal of the claim of SS.Move has been analysed and to have no impact on this evaluation.

Note that the RNG claim has been changed from DRG.4 to DRG.3.

The security evaluation re-used the evaluation results of previously performed evaluations. A full, up to date vulnerability analysis has been made, as well as renewed testing.

The scope of the evaluation is defined by the security target [ST], which identifies assumptions made during the evaluation, the intended environment for the NXP JCOP on SN100.C25 Secure Element, the security requirements, and the level of confidence (evaluation assurance level) at which the product is intended to satisfy the security requirements. Consumers of the NXP JCOP on SN100.C25 Secure Element are advised to verify that their own environment is consistent with the security target, and to give due consideration to the comments, observations and recommendations in this certification report.

The results documented in the evaluation technical report $[ETR]^1$ for this product provide sufficient evidence that it meets the EAL5 augmented (EAL5(+)) assurance requirements for the evaluated security functionality. This assurance level is augmented with ALC_DVS.2 (Sufficiency of security

¹ The Evaluation Technical Report contains information proprietary to the developer and/or the evaluator, and is not releasable for public review.



measures), AVA_VAN.5 (Advanced methodical vulnerability analysis), ASE_TSS.2 (TOE summary specification with architectural design summary) and ALC_FLR.1 (Basic flaw remediation).

The evaluation was conducted using the Common Methodology for Information Technology Security Evaluation, Version 3.1 Revision 5 [CEM], for conformance to the Common Criteria for Information Technology Security Evaluation, version 3.1 Revision 5 [CC].

TÜV Rheinland Nederland B.V., as the NSCIB Certification Body, declares that the evaluation meets all the conditions for international recognition of Common Criteria Certificates and that the product will be listed on the NSCIB Certified Products list. It should be noted that the certification results only apply to the specific version of the product as evaluated.



2 Certification Results

2.1 Identification of Target of Evaluation

The Target of Evaluation (TOE) for this evaluation is the NXP JCOP on SN100.C25 Secure Element from NXP Semiconductors GmbH located in Hamburg, Germany.

The TOE is comprised of the following main components:

Delivery item type	Identifier	Version
Hardware		
(part of SN100 certificate)	SN100x IC Package	B2.1
	Factory OS	4.2.0
	Boot OS	4.2.0
Software / firmware (part of SN100 certificate)	Flash Driver Software	4.0.8
	Factory Page	18218
	System Page Common	18468
	BootOS Patch	4.2.0 PL3 v4
	Service Software	4.13.3.0
	Crypto Library	1.0.0
Software	JCOP5.0 OS, native applications and OS Update Component	R1.11.0
	JCOP6.0 OS, native applications and OS Update Component	R1.13.0

To ensure secure usage a set of guidance documents is provided together with the NXP JCOP on SN100.C25 Secure Element. Details can be found in section 2.5 of this report.

For a detailed and precise description of the TOE lifecycle refer to the [ST], chapter 1.3.2.

2.2 Security Policy

This TOE is a composite TOE, consisting of a Java Card smart card operating system, an OS updater, an applet migration feature, a restricted mode and an underlying platform, which is composed of a library which provides cryptographic functions and a secure micro controller. The TOE provides Java Card 3.0.4 functionality with post-issuance applet loading, card content management and secure channel features as specified in Global Platform 2.2.1 including SCP03. It includes also NXP Proprietary Functionality

- Config Applet: JCOP OS includes a Config Applet that can be used for configuration of the TOE.
- OS Update Component: Proprietary functionality that can update JCOP OS or UpdaterOS.
- Applet Migration: Keep User Data, Key Data or PIN Data after updating an applet.
- Restricted Mode: In Restricted Mode only very limited functionality of the TOE is available such as, e.g.: reading logging information or resetting the Attack Counter.
- Error Detection Code (EDC) API.



Cryptographic functionality includes 3DES, AES, RSA and RSA CRT; SHA-1, SHA-224, SHA-256, SHA-384, SHA-512 hash algorithms, HMAC, ECC over GF(p), Twisted Edwards Curve 25519 for signature generation and verification (EdDSA), Diffie-Hellman Key Exchange on Montgomery Curve (25519). Furthermore, the TOE provides random number generation according to class DRG.3 of AIS 20.

2.3 Assumptions and Clarification of Scope

2.3.1 Assumptions

The assumptions defined in the Security Target are not covered by the TOE itself. These aspects lead to specific Security Objectives to be fulfilled by the TOE-Environment. Detailed information on these security objectives that must be fulfilled by the TOE environment can be found in section 5.2 of the [ST].


2.3.2 Clarification of scope

The evaluation did not reveal any threats to the TOE that are not countered by the evaluated security functions of the product.

Note that proprietary applications have been included in the TOE, but as there are no security claims on these functionalities, these application functionality has not been assessed, only the self-protection of the TSF.

2.4 Architectural Information

The logical architecture, originating from the Security Target [ST], of the TOE can be depicted as follows:

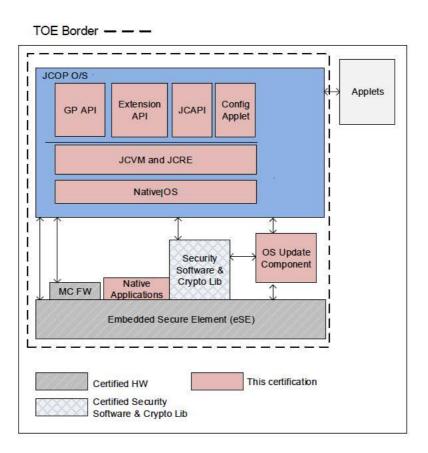



The TOE provides a variety of security features. The hardware of the Micro Controller already protects against physical attacks by applying various sensors to detect manipulations and by processing data in ways which protect against leakage of data by side channel analysis. With the software stack the TOE provides many cryptographic primitives for encryption, decryption, signature generation, signature verification, key generation, secure management of PINs and secure storage of confidential data (e.g. keys, PINs). Also the software stack implements several countermeasures to protect the TOE against attacks.

2.5 Documentation

The following documentation is provided with the product by the developer to the customer: For JCOP 5.0:

Identifier	Version
JCOP 5.0 R1.11.0, User Guidance Manual	Rev. 1.9, 2019-01-22
JCOP 5.0 R1.11.0, User Guidance Addendum	Rev. 1.8, 2018-04-10
JCOP 5.0 R1.11.0, User Guidance Anomaly Sheet	Rev. 1.8, 2018-06-08

For JCOP 6.0:

Identifier	Version
JCOP 6.0 R1.13.0, User Guidance Manual	Rev. 1.13, 2019-04-16
JCOP 6.0 R1.13.0, User Guidance Addendum	Rev. 1.13, 2019-04-16
JCOP 6.0 R1.13.0, User Guidance Anomaly Sheet	Rev. 1.14, 2019-06-08

2.6 IT Product Testing

Testing (depth, coverage, functional tests, independent testing): The evaluators examined the developer's testing activities documentation and verified that the developer has met their testing responsibilities.

2.6.1 Testing approach and depth

The tests cover all security functions and aspects of the TSF. Testing is performed during development as well as for acceptance/release. The developer used a set of test suites (industry standard and proprietary ones) and tools to test the TOE as well as an emulator, PC Platform and FPGA tool as some tests could only be performed in such environment. The identification was checked based on the SVN number. The developer uses a distributed test environment to allow usage of a vast amount of simultaneously driven testing equipment.

The developer has performed extensive testing on FSP, subsystem, module and module interface level. The tests are performed by NXP through execution of the test scripts using an automated and distributed system. Test tools and scripts are extensively used to verify that the tests return expected values.

Code coverage analysis is used by NXP to verify overall test completeness. Test benches for the various TOE parts are executed using code coverage measurement and analysis tools to determine the code coverage (i.e. lines, branches and/or instructions, depending on tool) of each test bench. Cases with incomplete coverage are analysed. For each tool, the developer has investigated and documented inherent limitations that can lead to coverage being reported as less than 100%. In such cases the developer provided a "gap" analysis with rationales (e.g. attack counter not hit due to redundancy checks).

The underlying hardware and crypto-library test results are extendable to composite evaluations, as the underlying platform is operated according to its guidance and the composite evaluation requirements are met.



For the testing performed by the evaluators, the developer has provided samples and a test environment. The evaluators have reproduced a selection of the developer tests, as well as a small number of test cases designed by the evaluator.

Tests from different test benches that are testing different parts of the functionality of the TOE were selected for witnessing at the developer location. The tests were running at the network of the developer.

Besides the repetition of develop tests, the evaluator defined spot-checks on the calculation of codecoverage as used by the developer to demonstrate their completeness of testing. As developer functional testing is quite rigorous, no other tests were defined by the evaluator.

The TOE has two configurations. Since the first certified configuration, i.e. JCOP 5.0 R1.11.0, did not change since the first certification and the test results (both of the developer and evaluator) were still valid. The evaluator verified that the added configuration, i.e. JCOP 6.0 R1.13.0, was tested and performed his own independent testing sample on this configuration. This means that all tests have been performed on the all configurations of the TOE.

2.6.2 Independent Penetration Testing

The methodical analysis performed was conducted along the following steps:

- When evaluating the evidence in the classes ADV and AGD potential vulnerabilities were identified from generating questions to the type of TOE and the specified behaviour. From the ASE class, no potential vulnerabilities were identified.
- For ADV IMP a thorough implementation representation review was performed on the TOE. During this attack oriented analysis the protection against the attack scenarios was analysed using the knowledge gained from all previous evaluation classes. This resulted in the identification of additional potential vulnerabilities. This analysis was performed according to the attack list in [JIL-AP]. An important source for assurance against attacks in this step is the [ETRfC-HW] of the underlying platform; no additional potential vulnerabilities were concluded from this.
- All potential vulnerabilities were analysed using the knowledge gained from all evaluation classes and the public domain. A judgment was made on how to assure that these potential vulnerabilities are not exploitable. For most of the potential vulnerabilities a penetration test was defined. Several potential vulnerabilities were found to be not exploitable due to an impractical attack path.

On the original certification, in total 11 test cases were described. The test effort is a fulltime occupation during to the test period as described in the test descriptions. It results in an overall effort of 21 weeks.

In the re-certification, 3 perturbation tests, 3 side channel analysis tests, and 2 logical tests were performed. See details in [ETRfC].

2.6.3 Test Configuration

The TOE was tested in both the JCOP 5.0 and JCOP 6.0 configurations. For some test cases, development versions of the TOE were used. The differences in these versions have been analysed and all tests are applicable to the actual version of the TOE in all of its configurations.

2.6.4 Testing Results

The testing activities, including configurations, procedures, test cases, expected results and observed results are summarised in the [ETR], with references to the documents containing the full details.

The developer's tests and the independent functional tests produced the expected results, giving assurance that the TOE behaves as specified in its [ST] and functional specification.

No exploitable vulnerabilities were found with the independent penetration tests.



The algorithmic security level of cryptographic functionality has not been rated in this certification process, but the current consensus on the algorithmic security level in the open domain, i.e. from the current best cryptanalytic attacks published, has been taken into account.

The TOE supports a wider range of key sizes (see [ST]), including those with sufficient algorithmic security level to exceed 100 bits as required for high attack potential (AVA VAN.5).

The strength of the implementation of the cryptographic functionality has been assessed in the evaluation, as part of the AVA_VAN activities. These activities revealed that for some cryptographic functionality the security level could be reduced from an algorithmic security level above 100 bits to a practical remaining security level lower than 100 bits. As the remaining security level still exceeds 80 bits, this is considered sufficient. So no exploitable vulnerabilities were found with the independent penetration tests.

For composite evaluations, please consult the [ETRfC] for details.

2.7 Re-used evaluation results

There has been extensive re-use of the ALC aspects for the sites involved in the development and production of the TOE, by use of 6 site certificates:

- NXP Semiconductors in Hamburg,
- NXP Semiconductors in Gratkorn.
- NXP Semiconductors India Private limited.
- NXP San Diego,
- NXP San Jose.
- NXP Eindhoven HTC60.

Sites involved in the development and production of the hardware platform were re-used by composition. No sites have been visited as part of this evaluation.

Testing (both functional and penetration) results from the first certification have been re-used with argumentation as the tests were less than a year old and there were no changes to the first configuration of the TOE ("JCOP 5.0 R1.11.0"). To address the second configuration of the TOE ("JCOP 6.0 R1.13.0"), testing also used in EMVco certifications has been used in this recertification, as well as testing only for the CC certification.

2.8 Evaluated Configuration

The TOE is defined uniquely by its name and version number NXP JCOP on SN100.C25 Secure Element (both listed configurations "JCOP 5.0 R1.11.0" and "JCOP 6.0 R1.13.0").

2.9 Results of the Evaluation

The evaluation lab documented their evaluation results in the [ETR]² which references a ASE Intermediate Report and other evaluator documents. To support composite evaluations according to [CCDB-2007-09-01] a derived document [ETRfC] was provided and approved. This document provides details of the TOE evaluation that have to be considered when this TOE is used as platform in a composite evaluation.

The verdict of each claimed assurance requirement is "Pass".

Based on the above evaluation results the evaluation lab concluded the NXP JCOP on SN100.C25 Secure Element, to be **CC Part 2 extended, CC Part 3 conformant** and to meet the requirements of EAL 5 augmented with AVA_VAN.5, ALC_DVS.2, ASE_TSS.2 and ALC_FLR.1. This implies that the product satisfies the security requirements specified in Security Target [ST].

The Security Target claims 'demonstrable' conformance to the Protection Profile [JC PP].

² The Evaluation Technical Report contains information proprietary to the developer and/or the evaluator, and is not releasable for public review.



2.10 Comments/Recommendations

The user guidance as outlined in section 2.5 contains necessary information about the usage of the TOE. Certain aspects of the TOE's security functionality, in particular the countermeasures against attacks, depend on accurate conformance to the user guidance of both the software and the hardware part of the TOE. There are no particular obligations or recommendations for the user apart from following the user guidance. Please note that the documents contain relevant details with respect to the resistance against certain attacks.

In addition all aspects of assumptions, threats and policies as outlined in the Security Target not covered by the TOE itself need to be fulfilled by the operational environment of the TOE.

The customer or user of the product shall consider the results of the certification within his system risk management process. In order for the evolution of attack methods and techniques to be covered, he should define the period of time until a re-assessment for the TOE is required and thus requested from the sponsor of the certificate.

For users of the old certification results: note that the RNG claim has been changed from DRG.4 to DRG.3.

The strength of the implemented cryptographic algorithms and protocols was not rated in the course of this evaluation. This specifically applies to the following proprietary or non-standard algorithms, protocols and implementations:

• none (note that any algorithms implemented by the proprietary applets is out of scope for this certifications).

Not all key sizes specified in the [ST] have sufficient cryptographic strength for satisfying the AVA_VAN.5 "high attack potential". In order to be protected against attackers with a "high attack potential", sufficiently large cryptographic key sizes shall be used (references can be found in national and international documents and standards).





3 **Security Target**

The Security Target, NXP JCOP on SN100.C25 Secure Element, Rev 2.2, 6 November 2019 [ST] is included here by reference.

Please note that for the need of publication a public version [ST-lite] has been created and verified according to [ST-SAN].

4 **Definitions**

This list of Acronyms and the glossary of terms contains elements that are not already defined by the CC or CEM:

ACL Access Control List`

AES Advanced Encryption Standard

CBC Cipher Block Chaining (a block cipher mode of operation) **CBC-MAC** Cipher Block Chaining Message Authentication Code

DES Data Encryption Standard DFA Differential Fault Analysis

ECB Electronic Code Book (a block cipher mode of operation)

ECC Elliptic Curve Cryptography

ECDH Elliptic Curve Diffie-Hellman algorithm **ECDSA** Elliptic Curve Digital Signature Algorithm

EMA Electromagnetic Analysis

IC Integrated Circuit

IT Information Technology

ITSEF IT Security Evaluation Facility JIL Joint Interpretation Library MAC Message Authentication Code

NSCIB Netherlands scheme for certification in the area of IT security

PKI Public Key Infrastructure

PP **Protection Profile**

RNG Random Number Generator Remote Method Invocation RMI

RSA Rivest-Shamir-Adleman Algorithm

SHA Secure Hash Algorithm

SPA/DPA Simple/Differential Power Analysis

TOE Target of Evaluation

True Random Number Generator **TRNG**



5 Bibliography

This section lists all referenced documentation used as source material in the compilation of this report:

[CC] Common Criteria for Information Technology Security Evaluation, Parts I, II and III,

Version 3.1 Revision 5, April 2017.

[CEM] Common Methodology for Information Technology Security Evaluation, Version 3.1

Revision 5, April 2017.

[ETR] Evaluation Technical Report NXP JCOP on SN100.C25 Secure Element, Version

1.0, 2019-11-18.

[ETRfC] ETR for Composite Evaluation NXP JCOP on SN100.C25 Secure Element,

Version 1.0, 2019-11-18.

[HW+CL-CERT] Certification Report SN100 Series - Secure Element with Crypto Library SN100_SE

B2.1 C25/C48/C58, version 1, 18 September 2019, CC-174263-CR2.

[HW+CL-ETRfC] Evaluation Technical Report for Composition SN100 Series - Secure Element with

Crypto Library B2.1 C25 and C48 and C58 EAL6+, 19-RPT-569 v7.0, 9 September

2019.

[HW+CL-ST] Security Target, SN100 Series - Secure Element with Crypto Library, rev 3.3, 16

August 2019.

[JC PP] Java Card Protection Profile – Open Configuration, Version 3.0.5, December 2017

(BSI-CC-PP-0099-2017).

[NSCIB] Netherlands Scheme for Certification in the Area of IT Security, Version 2.4, 27

Sept 2017.

[ST] Security Target, NXP JCOP on SN100.C25 Secure Element, Rev 2.2, 6 November

2019, NXP Semiconductors GmbH.

[ST-lite] Security Target Lite, NXP JCOP on SN100.C25 Secure Element, Rev 2.0, 6

November 2019, NXP Semiconductors GmbH.

[ST-SAN] ST sanitising for publication, CC Supporting Document CCDB-2006-04-004, April

2006.

(This is the end of this report).