

NetApp, Inc.

Data ONTAP® v8.1.1 7-Mode

Security Target

Evaluation Assurance Level (EAL): EAL2+
Document Version: 0.7



Prepared for:



NetApp, Inc.
495 East Java Drive
Sunnyvale, CA 94089
United States of America

Phone: +1 408 822 6000

<http://www.netapp.com>

Prepared by:



Corsec Security, Inc.
13135 Lee Jackson Memorial Hwy., Suite 220
Fairfax, VA 22033
United States of America

Phone: +1 703 267 6050

<http://www.corsec.com>

Table of Contents

I	INTRODUCTION	4
1.1	PURPOSE	4
1.2	SECURITY TARGET AND TOE REFERENCES	4
1.3	PRODUCT OVERVIEW	5
1.4	TOE OVERVIEW	6
1.4.1	Brief Description of the Components of the TOE	7
1.4.2	TOE Environment Hardware	11
1.4.3	TOE Environment Software	11
1.5	TOE DESCRIPTION	14
1.5.1	Physical Scope	14
1.5.2	Logical Scope	15
1.5.3	Product Physical and Logical Features and Functionality not included in the TOE	17
2	CONFORMANCE CLAIMS	19
3	SECURITY PROBLEM	20
3.1	THREATS TO SECURITY	20
3.2	ORGANIZATIONAL SECURITY POLICIES	21
3.3	ASSUMPTIONS	21
4	SECURITY OBJECTIVES	22
4.1	SECURITY OBJECTIVES FOR THE TOE	22
4.2	SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT	23
4.2.1	IT Security Objectives	23
4.2.2	Non-IT Security Objectives	23
5	EXTENDED COMPONENTS	25
5.1	EXTENDED TOE SECURITY FUNCTIONAL COMPONENTS	25
5.2	EXTENDED TOE SECURITY ASSURANCE COMPONENTS	27
6	SECURITY REQUIREMENTS	28
6.1	CONVENTIONS	28
6.2	SECURITY FUNCTIONAL REQUIREMENTS	28
6.2.1	Class FAU: Security Audit	30
6.2.2	Class FDP: User Data Protection	32
6.2.3	Class FIA: Identification and Authentication	37
6.2.4	Class FMT: Security Management	38
6.2.5	Class FPT: Protection of the TSF	39
6.2.6	Class FTA: TOE Access	40
6.3	SECURITY ASSURANCE REQUIREMENTS	41
7	TOE SUMMARY SPECIFICATION	42
7.1	TOE SECURITY FUNCTIONS	42
7.1.1	Security Audit	43
7.1.2	User Data Protection	45
7.1.3	Identification and Authentication	51
7.1.4	Security Management	52
7.1.5	Protection of the TSF	54
7.1.6	TOE Access	55
8	RATIONALE	56
8.1	CONFORMANCE CLAIMS RATIONALE	56
8.2	SECURITY OBJECTIVES RATIONALE	56
8.2.1	Security Objectives Rationale Relating to Threats	56
8.2.2	Security Objectives Rationale Relating to Assumptions	60
8.3	RATIONALE FOR EXTENDED SECURITY FUNCTIONAL REQUIREMENTS	62

8.4	RATIONALE FOR EXTENDED TOE SECURITY ASSURANCE REQUIREMENTS.....	62
8.5	SECURITY REQUIREMENTS RATIONALE	62
8.5.1	<i>Rationale for Security Functional Requirements of the TOE Objectives</i>	62
8.5.2	<i>Security Assurance Requirements Rationale</i>	66
8.5.3	<i>Dependency Rationale</i>	66
9	ACRONYMS AND TERMS	69
9.1	TERMINOLOGY	69
9.2	ACRONYMS	69

Table of Figures

FIGURE 1	SAMPLE DEPLOYMENT CONFIGURATION OF THE TOE	7
FIGURE 2	WAFL FUNCTIONALITY DETAIL.....	9
FIGURE 3	PHYSICAL TOE BOUNDARY	14
FIGURE 4	TSF DOMAIN SEPARATION FOR SOFTWARE TOES FAMILY DECOMPOSITION.....	26
FIGURE 5	MULTISTORE ENABLES SECURE MULTI-TENANCY FOR SHARED STORAGE IMPLEMENTATIONS	55

List of Tables

TABLE 1	ST AND TOE REFERENCES.....	4
TABLE 2	SECURITY ATTRIBUTE DESCRIPTIONS.....	10
TABLE 3	TOE CLIENT SECURITY ATTRIBUTE DESCRIPTIONS.....	11
TABLE 4	CC AND PP CONFORMANCE.....	19
TABLE 5	THREATS	20
TABLE 6	ASSUMPTIONS.....	21
TABLE 7	SECURITY OBJECTIVES FOR THE TOE.....	22
TABLE 8	IT SECURITY OBJECTIVES	23
TABLE 9	NON-IT SECURITY OBJECTIVES	23
TABLE 10	EXTENDED TOE SECURITY FUNCTIONAL REQUIREMENTS	25
TABLE 11	TOE SECURITY FUNCTIONAL REQUIREMENTS.....	28
TABLE 12	FAU_GEN.1.2 AUDIT GENERATION DETAILS.....	30
TABLE 13	FDP_ACC.1.1 DETAIL	32
TABLE 14	FDP_ACF.1.1 DETAIL.....	32
TABLE 15	FDP_ACF.1.2 DETAIL.....	34
TABLE 16	ROLES MAINTAINED BY THE TOE	38
TABLE 17	EAL2 ASSURANCE REQUIREMENTS.....	41
TABLE 18	MAPPING OF TOE SECURITY FUNCTIONS TO SECURITY FUNCTIONAL REQUIREMENTS.....	42
TABLE 19	AUDIT TRAIL STORAGE ACCESS BY ROLE.....	43
TABLE 20	UNIX STYLE FILE ACCESS REQUESTS	47
TABLE 21	NTFS STYLE FILE ACCESS REQUESTS	47
TABLE 22	SECURITY FUNCTIONS CAPABILITIES.....	52
TABLE 23	THREATS:OBJECTIVES MAPPING	56
TABLE 24	ASSUMPTIONS:OBJECTIVES MAPPING.....	60
TABLE 25	OBJECTIVES:SFRs MAPPING.....	62
TABLE 26	FUNCTIONAL REQUIREMENTS DEPENDENCIES.....	66
TABLE 27	TERMS.....	69
TABLE 28	ACRONYMS	69



Introduction

This section identifies the Security Target (ST), Target of Evaluation (TOE), and the organization of the ST. The TOE is the NetApp Data ONTAP® v8.1.1 7-Mode, and will hereafter be referred to as the TOE or Data ONTAP® v8.1.1 7-Mode throughout this document. The TOE is a software-only microkernel operating system that supports multi-protocol services and advanced data management capabilities for consolidating and protecting data for enterprise applications and users. The TOE includes a separate software-only management GUI¹ called the System Manager which is used to manage the TOE security functions. NetApp's storage appliances are based on the Data ONTAP® v8.1.1 7-Mode microkernel operating system, where a single storage appliance is capable of running one version of the TOE.

1.1 Purpose

This ST is divided into nine sections, as follows:

- Introduction (Section 1) – Provides a brief summary of the ST contents and describes the organization of other sections within this document. It also provides an overview of the TOE security functions and describes the physical and logical scope for the TOE, as well as the ST and TOE references.
- Conformance Claims (Section 2) – Provides the identification of any Common Criteria (CC), Protection Profile, and Evaluation Assurance Level (EAL) package claims. It also identifies whether the ST contains extended security requirements.
- Security Problem (Section 3) – Describes the threats, organizational security policies, and assumptions that pertain to the TOE and its environment.
- Security Objectives (Section 4) – Identifies the security objectives that are satisfied by the TOE and its environment.
- Extended Components (Section 5) – Identifies new components (extended Security Functional Requirements (SFRs) and extended Security Assurance Requirements (SARs)) that are not included in CC Part 2 or CC Part 3.
- Security Requirements (Section 6) – Presents the SFRs and SARs met by the TOE.
- TOE Summary Specification (Section 7) – Describes the security functions provided by the TOE that satisfy the security functional requirements and objectives.
- Rationale (Section 8) - Presents the rationale for the security objectives, requirements, and SFR dependencies as to their consistency, completeness, and suitability.
- Acronyms and Terms (Section 9) – Defines the acronyms and terminology used within this ST.

1.2 Security Target and TOE References

Table 1 below shows the ST and TOE references.

Table 1 ST and TOE References

ST Title	NetApp, Inc. Data ONTAP® v8.1.1 7-Mode Security Target
ST Version	Version 0.7
ST Author	Corsec Security, Inc.
ST Publication Date	10/22/2012
TOE Reference	NetApp Data ONTAP® v8.1.1 7-Mode

¹ Graphical User Interface

1.3 Product Overview

The Product Overview provides a high level description of the product that is the subject of the evaluation. The following section, TOE Overview, will provide the introduction to the parts of the overall product offering that are specifically being evaluated.

Data ONTAP® v8.1.1 7-Mode is a proprietary microkernel operating system developed by NetApp. The microkernel is included in the distribution of several of NetApp's storage solution products including the Fabric Attached Storage (FAS) and V-Series appliances. Data ONTAP® v8.1.1 7-Mode provides data management functions that include providing secure data storage and multi-protocol access.

Data ONTAP® v8.1.1 7-Mode is a software product that is distributed with the following NetApp storage solution products:

- **FAS:** NetApp's FAS systems offer seamless access to a full range of enterprise data for users on a variety of platforms. FAS systems support Network File System (NFS) and Common Internet File System (CIFS) for file access, as well as Fibre Channel Protocol (FCP) and Internet Small Computer System Interface (iSCSI) for block-storage access.
- **V-Series:** The V-Series product family provides unified Network Attached Storage (NAS) and Storage Area Network (SAN) access to data stored in Fibre Channel (FC) SAN storage arrays enabling data center storage deployment.

V-Series and FAS products use the same hardware controller and run the Data ONTAP® v8.1.1 7-Mode operating system. The key difference between a V-Series system front ending a storage array and a FAS system with NetApp disks is that the V-Series controller no longer runs Redundant Array of Independent Disks (RAID) 4 or RAID-DP™². Instead, the V-Series system offloads the RAID protection to the storage array. V-Series storage pools are large RAID 0 stripe sets of iSCSI or Fibre Channel Logical Unit Numbers (LUNs).

For more information on NetApp Storage Controllers on which the product operates, see section 1.4.2. The products support both single controller and High Availability controller pairs as Storage Controller options on some models.

Data ONTAP® v8.1.1 7-Mode supports multiple authentication mechanisms:

- For CIFS shares, Data ONTAP® v8.1.1 7-Mode can authenticate end users with Kerberos[†] or New Technology Local Area Network Manager (NTLM)[†] against an Active Directory (AD) domain, with NTLM[†] against an Windows NT-style domain, or locally using NT-style NTLM authentication against a local user database.
- For NFS shares, the TOE can authenticate end users with Kerberos against both an Active Directory domain and a Network Information Service (NIS) domain, or locally against User Identifiers (UID) and passwords in local UNIX identity stores and `/etc/passwd/`.
- For administration, the TOE authenticates administrators against a local user repository.

² RAID-DP – a NetApp proprietary Double Parity RAID 6 implementation that prevents data loss when two drives fail

[†] Off-box Identification and Authentication to a NIS or AD domain via either NTLM or Kerberos is a functionality provided by the IT Environment. Identification and Authentication of end-users is not a claimed security functionality of the TOE whether local or remote.

The following section, TOE Overview, will provide the introduction to the parts of the overall product offering that are specifically being evaluated.

For management of the common storage system functions, a browser based graphical user interface (GUI) called the System Manager is used. System Manger supports the following operating systems shown below.

Windows system can run on one of the following in 32-bit or 64-bit configuration:

- Windows XP Pro SP3
- Windows Vista SP2
- Windows 7 Enterprise
- Windows Server 2003 SP2
- Windows Server 2008 SP2

Linux system can run on one of the following in 32-bit configuration:

- Red Hat Enterprise Linux Server 5
- SUSE Linux Enterprise Server 11

See section 1.4.3 for the specified test environment configuration for System Manger.

I.4 TOE Overview

The TOE Overview summarizes the usage and major security features of the TOE. The TOE Overview provides a context for the TOE evaluation by identifying the TOE type, describing the product, and defining the specific evaluated configuration. Functionality included in the logical software-only TOE boundary includes:

- Secure Multi-protocol Data Storage Access

Secure storage is provided by the TOE by implementing strict access control rules to data managed by the TOE. Multi-protocol access support is provided by the TOE by supporting both NFS and CIFS clients and providing transparent access to data.

- Identification and Authentication

The TOE supports on-box Identification and Authentication of administrators against a local user repository.

- Domain Separation

The TOE can function as a storage server for multiple groups of users within the TOE's scope of control which must remain isolated from one another through the implementation of NetApp's MultiStore virtualization technology.

- Management

The Management functionality included in the TOE's logical boundary supports functionality that enables users to modify TOE Data and TSF security functional behavior.

- Audit

The Audit functionality provided by the TOE generates audit records for administrator logins and configuration changes.

Figure 1 shows the details of a sample deployment configuration of the TOE. The following acronyms not yet defined are used in Figure 1:

SATA - Serial Advanced Technology Attachment

SAS - Serial Attached Small Computer Systems Interface (SCSI)

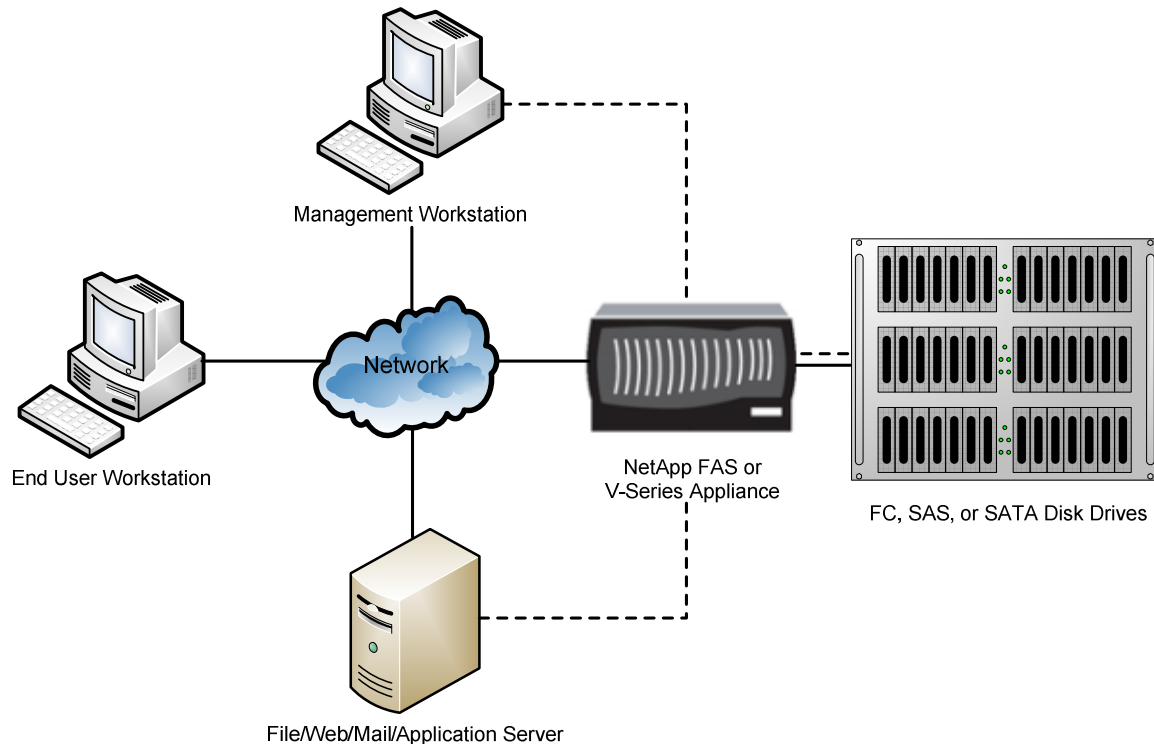


Figure 1 Sample Deployment Configuration of the TOE

1.4.1 Brief Description of the Components of the TOE

Data ONTAP® v8.1.1 7-Mode is divided into four components: Write Anywhere File Layout® (WAFL), System Administration, Operating System Kernel, and the System Manager GUI. The four components are described below.

WAFL - The TOE's WAFL component is responsible for implementing the TOE's Discretionary Access Control (DAC) Security Functional Policy (SFP). The DAC SFP includes enforcing access rules to user data based on client type, client security attributes, file types, file security attributes and access request (create, read, write, execute, delete, change permission, and change owner).

System Administration - The System Administration component provides an administrator with a Command Line Interface (CLI) that supports administrator functions including enforcing identification and authentication, user roles, and providing the necessary user interface commands that enable an authorized administrator to support the TOE's security functionality. The System Administration function is performed by a user with the *root*, or *admin* role, and this functionality is available locally and remotely via a CLI, or remotely via one of several management interfaces detailed in section 7.1.4. System Administration functions are audited by default.

Operating System Kernel - The Kernel facilitates communication between the components of the Operating System. The Kernel is a small portion of the operating system through which all references to information and all changes to authorizations must pass.

System Manager GUI - The System Manager GUI component provides an authorized administrator with a web based GUI that supports administrator functions including enforcing identification and authentication, user roles, and providing the necessary user interface commands that enable an authorized administrator to support the TOE's security functionality. The System Manager GUI function is performed by a user with the *root*, or *admin* role and provides remote management of the TOE security functions. All security relevant actions within the System Manager GUI are audited by default. The System Manager GUI is a separate TOE component that must be installed on a management workstation.

1.4.1.1 WAFL Functionality Detail

The TOE's WAFL Component protects User data. The TOE uses the subject, subject's security attributes, the object, the object's security attributes and the requested operation to determine if access is granted. The subjects are end users on remote systems that access the TOE via NFS or CIFS. Figure 2 depicts the WAFL functionality.

The following acronyms not yet defined are used in Figure 2 WAFL Functionality Detail below:

- ACL – Access Control List
- ACE – Access Control Entry
- GID – Group Identifier
- NTFS – New Technology File System
- SD – Security Descriptor
- SID – Security Identifier

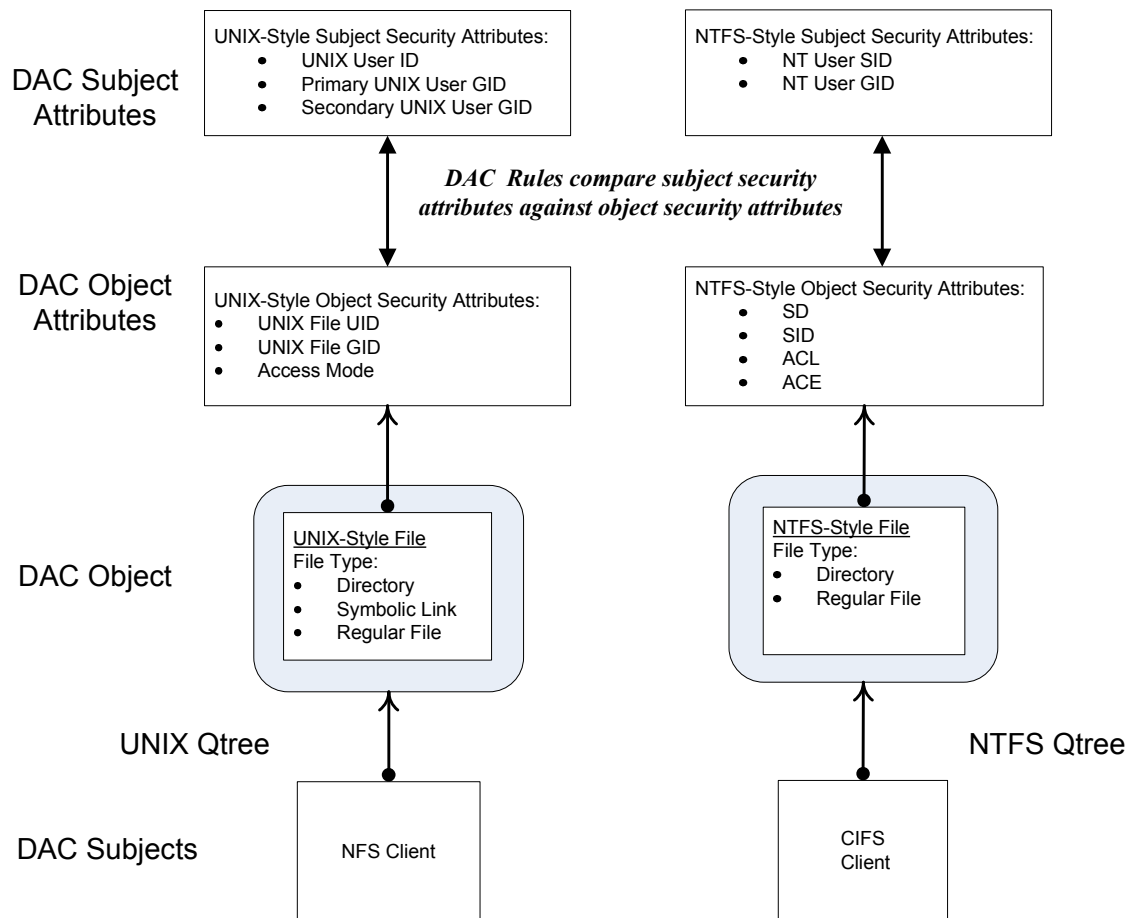


Figure 2 WAFL Functionality Detail

1.4.1.1.1 User Data

The User Data that is covered by the DAC SFP are the files that reside within the TOE's scope of control (i.e. user files on NetApp disks attached to an FAS series appliance, or SANs attached to a V-Series appliance). Each file maintained by the TOE has a file style associated with it. The TOE maintains three styles of files: NFSv3 UNIX-Style files, NFSv4 UNIX-Style files, and NTFS-Style files. NFSv3 UNIX-Style files have UNIX-Style security attributes, NFSv4 UNIX-Style files have NFSv4 security attributes, and NTFS-Style files have NTFS-Style security attributes.

In addition to a file style, each file has a file type. The file types may be directories, symbolic links, or regular files. UNIX-Style files may be a directory, a symbolic link or a regular file. NTFS-Style files do not have symbolic links; therefore the file type will be either a directory or a regular file.

A Qtree is a disk space partition. In addition to the file type, the TOE maintains three different storage types: UNIX Qtrees, NTFS Qtrees and Mixed Qtrees. UNIX Qtrees store UNIX-Style files with UNIX-Style security attributes. NTFS Qtrees store NTFS-Style files with NTFS Style security attributes. Mixed Qtrees store both styles of files. Files stored in Mixed Qtrees always have the security attributes associated with the client that was last used to change their access permissions or ownership. Mixed Qtrees are not part of the evaluated configuration.

A file's security attributes are determined when the file is created. The TOE will create UNIX-Style security attributes for a file stored in a UNIX Qtree. The TOE will create NTFS-Style security attributes for a file stored in an NTFS Qtree. These security attributes are outlined in Table 2 below:

Table 2 Security Attribute Descriptions

Security Attribute	Description
Access Control Entry	A data structure associated with NTFS-Style files. Each ACE explicitly allows or denies access to a user or group for a specific NTFS-Style supported operation.
Access Control List	A data structure associated with NTFS-Style files. Each ACL includes one or more ACEs.
Access Mode	A data structure associated with a UNIX-Style File. An access mode string is the last nine characters of a UNIX-Style File Permission string (drwxrwxrwx). The nine characters represent the access mode for the file in three sets of rwx triplets. The first triplet specifies the permission for the file's owner (UID). The next triplet specifies the permissions for the group associated with the file (UNIX file GID). The last three characters specify the permission for the users who are neither the owner nor members of the file's group (other). The rwx triplet identifies the permission for that set (owner, group, other). The three characters represent read, write or execute privileges. If the character is a dash, the set does not have permissions to perform the specific action.
File Permission String	A data structure associated with a UNIX-Style file. The file permission string is represented in ten characters common to all UNIX files (e.g. drwxrwxrwx). The first character contains one of three characters that identify the file type: d for directory, l for a symbolic link, or a dash (-) indicates the file is a regular file. The following 9 characters represent the access mode for the file in three sets of rwx triplets.
Security Descriptor	A data structure associated with NTFS-Style files. A SD contains a SID and an ACL.
Security Identifier	The CIFS User SID of the file's owner.
Group Identifier	A UNIX File GID identifies the groups associated with the UNIX-Style file.
User Identifier	The UNIX User UID of the file's owner.

1.4.1.1.2 TOE Clients

End user access to user data is possible through the use of either the NFS or CIFS client protocol. In a typical deployment as depicted in Figure 1 above, end user workstations or the file, web, mail, or application servers of the IT Environment connect to the TOE that hosts the user data residing on the storage arrays. The TOE is positioned between these workstations and servers, and the storage arrays, facilitating seamless NFS or CIFS connectivity between them while adding increased performance, efficiency, manageability, scalability, security, redundancy, and fault tolerance.

End system workstations and the file, web, mail, or application servers authenticate with the TOE according to the operating procedures of the organization and IT Environment. Typical scenarios include the file, web, mail, or application servers prompting end users for credentials as they attempt to access a web page, e-mail system, or stand alone application, or the TOE prompting end users for credentials as they attempt to access shared network directories (NFS or CIFS). The TOE facilitates server and end-user

authentication of the end users attempting to access the TSF data residing within the TOE's scope of control via NFS or CIFS.

To determine if file access is allowed, the TOE compares a client's security attributes with the file's security attributes, listed in Table 3 below. The type of client security attributes (UNIX-Style or NTFS-Style) required by the TOE depends on the type of security attributes maintained by the file and the operation requested. The file or operation will require UNIX-Style subject security attributes (NFSv3 or NFSv4), NTFS-Style subject security attributes or both. If the file or operation requires UNIX-Style security attributes for a client, the TOE will attempt to obtain the client's UNIX User UID and UNIX User GID. If the file or operation requires NTFS-Style subject security attributes, the TOE will attempt to acquire the client's Windows User SID and a Windows User GID. Because of the native operating systems of the two clients, NFS clients are associated with UNIX-Style security attributes and CIFS Clients are associated with NTFS-Style security attributes.

The resolution of client security attributes is processed differently by the TOE for each type of client because the two protocols are different. NTFS-Style security attributes for a CIFS client are resolved when the CIFS client logs into the remote system and joins the Windows domain (of which the TOE is a member). Therefore, NTFS-Style security attributes for a CIFS client is completed before the TOE receives a CIFS request. Alternatively, NFS client security attributes are resolved per NFS request. The UNIX User UID is passed in each NFS request and this UID is used to resolve the required client security attributes.

Table 3 TOE Client Security Attribute Descriptions

Security Attribute	Description
Windows User SID	The Windows user ID number. Each user in a Windows system is assigned a unique Windows User SID.
Windows User GID	The Windows group ID number. Each user in a Windows system is assigned to a group and that group is assigned a unique GID.
UNIX User UID	The UNIX user ID number. Each user in a UNIX system is assigned a unique UNIX User UID.
UNIX User GID	The UNIX group ID number. Each user in an UNIX system is assigned to a group and that group is assigned a unique GID.

1.4.2 TOE Environment Hardware

The IT Environment Hardware includes the appliance hardware of the FAS, V-Series systems, and System Manager V2.0.2. The product functionality provided by the FAS and V-Series products is supplied by the IT Environment. For a complete list of NetApp Storage Controllers on which the TOE operates, refer to the "New and changed platform and hardware support" section of the release notes for Data ONTAP® v8.1.1 7-Mode.

1.4.3 TOE Environment Software

The IT Environment Software includes several components of the NetApp storage solutions that are outside the TOE boundary. The following functionality is used by the TOE; however, it is not evaluated:

- CIFS Client software, CIFS Server software, NFS Client software, and NFS Server software

The TOE provides secure access to files under control of the TOE. The TOE provides a protective layer between NFS Clients and CIFS Clients and NFS Servers and CIFS Servers ensuring that only authorized users (clients) can access TOE protected files. The CIFS Client, NFS Client, CIFS Server and NFS Server software is supplied by the IT Environment.

- iSCSI Protocol, FCP Protocol

Storage systems can be fabric-attached, network-attached, or direct-attached to support iSCSI over TCP³/IP⁴ as well as SCSI over FCP for block-storage access.

- RAID Manager

The RAID Manager supports multiple disk drives which provide fault tolerance and performance. The RAID Manager is supplied by the IT Environment.

- TCP/IP Protocol

The UDP⁵/TCP/IP protocol stack is supplied by the IT Environment.

- Browser Software, SNMPv3 Protocol

The web browser used to access the Security Manager web interface and the SNMPv3 protocol used to communicate between the remote workstation and the TOE are supplied by the IT Environment. The System Manager V2 does not support SNMPv3; as a result, the community string can be changed to use SNMPv1/v2c.

Before an authorized administrator begins the software setup process, he must ensure that the network and storage environment for the new storage system has been prepared according to the Guidance Documentation. For further information, refer to Section “Prerequisites to initial configuration” in the *Data ONTAP® 8.1 7-Mode Software Setup Guide*. The following sections must be referred to in the previously stated document:

- Requirements for the administration host
- High-availability (HA) requirements
- Requirements for Windows domains
- Requirements for Active Directory authentication
- Time services requirements
- Switch configuration requirements for interface groups
- DHCP requirements for remote access
- Managing feature licenses
- Requirements for creating array LUNs for V-Series systems
- V-Series system licensing requirements

Once the proper configuration have been met, the administrator must gather the appropriate configuration items from the network and storage environment and keep them handy for proper installation of the TOE. If the V-Series is ordered with native disks, the factory has pre-installed Data ONTAP® v8.1.1 7-Mode software and licenses for the TOE administrator. If the system was ordered without native disks, the TOE administrator must install the Data ONTAP® v8.1.1 7-Mode software and licenses after running the setup program.

³ TCP – Transport Control Protocol

⁴ IP – Internet Protocol

⁵ UDP – User Datagram Protocol

System Requirements for System Manager

To ensure that the required host system configuration, operating system, and browser to run the System Management software.

Host system must meet the following minimum requirements:

- Pentium x86 processor
- 1-GB⁶ RAM⁷
- 40-GB HDD⁸
- Wireless or Ethernet connection to the network
- A 32-bit Windows or Linux operating system or a 64-bit Windows operating system
- Adobe Flash Player 8.0 or later
- 32-bit Sun Java Runtime Environment (JRE) 6
 - Note: It is best to use 32-bit JRE 6 update 24 or later.

Windows system must be running:

- Windows Server 2008 SP2 32-bit

Web Browser must be one of the following:

- 32-bit Internet Explorer 7.0 or 8.0 (for Windows)
- 32-bit Mozilla Firefox 3.0, 3.5, or 3.6 (for both Windows and Linux)
 - Note: System Manager is best viewed using the resolution 1280 by 1024 pixels.

Storage systems must be running the following versions of Data ONTAP:

- Data ONTAP® v8.1.1 7-Mode

See the Netapp Interoperability Matrix Tool for the latest versions: <http://now.netapp.com/matrix/> Note: This web site requires a login to view the matrix.

⁶ GB – Gigabyte

⁷ RAM – Random Access Memory

⁸ HDD – Hard Disk Drive

I.5 TOE Description

This section primarily addresses the physical and logical components of the TOE included in the evaluation.

I.5.1 Physical Scope

Figure 3 illustrates the physical scope and the physical boundary of the overall solution, its deployment in a networked environment, and ties together all of the components of the TOE and the constituents of the TOE Environment. The essential physical component for the proper operation of the TOE in the evaluated configuration is the Data ONTAP® v8.1.1 7-Mode operating system which consists of the WAFL, the System Administration, System Manager installed on the Management Workstation (software-only), and the Operating System Kernel as depicted in Figure 3 below:

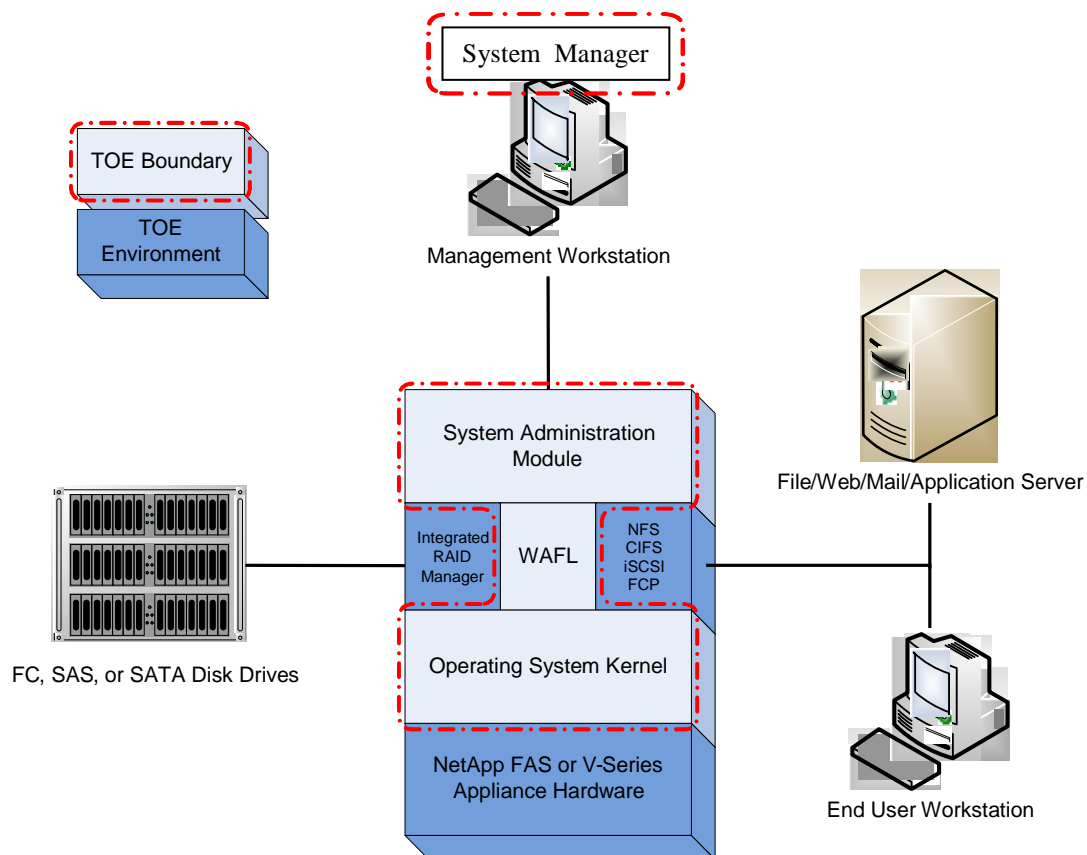


Figure 3 Physical TOE Boundary

I.5.1.1 TOE Software

The TOE software is a microkernel operating system which runs on a subset of NetApp's proprietary 64-bit x86-based storage controller platforms listed above in section 1.4.2.

The following statements describe the TOE's evaluated configuration:

The `waf1.root_only_chown` option in the evaluated configuration is disabled. When enabled, only a root user has permission to change the owner of a file. When disabled, the `waf1.root_only_chown` option enables the owner of a file to change ownership of a file.

All authorized NetApp Administrators have the TSF admin role.

The `security.admin.authentication` parameter is set to “internal”. When set to “internal”, administrators are authenticated locally, and Lightweight Directory Access Protocol (LDAP), NIS, etc. authentication is disabled.

The `security.passwd.rules.everyone` parameter is set to “on”. When set to “on”, all administrative users, including the ‘root’ and ‘administrator’ accounts are subject to password rules such as account lock-out.

The options `auditlog.enable` parameter is set to “on”. When set to “on”, the auditing functionality of the TOE is enabled.

The evaluated configuration does not support changing a Qtree’s style once the Qtree is configured.

1.5.1.2 Guidance Documentation

The following guides are required reading and part of the TOE:

1. Administrator and User guidance for Data ONTAP Common Criteria deployments for Data ONTAP® v8.1.1 7-Mode
2. Data ONTAP® v8.1.1 7-Mode System Administration Guides
3. Data ONTAP® v8.1.1 7-Mode MultiStore Management Guides
4. Data ONTAP® v8.1.1 7-Mode File Access and Protocols Management Guides
5. Data ONTAP® v8.1.1 7-Mode Release notes
6. Data ONTAP® 8.1.1 7-Mode Data Protection Tape Backup and Recovery Guide
7. Data ONTAP® 8.1.1 7-Mode Network Management Guide
8. Data ONTAP® 8.1.1 7-Mode Software Setup Guide
9. Data ONTAP® 8.1.1 7-Mode Storage Efficiency Management Guide
10. Data ONTAP® 8.1.1 7-Mode Storage Management Guide
11. Data ONTAP® 8.1.1 7-Mode High-Availability Configuration Guide
12. Data ONTAP Security Guidance
13. NetApp, Data ONTAP® 8.0 7-Mode Commands: Manual Page Reference, Volume 1
14. NetApp, Data ONTAP® 8.0 7-Mode Commands: Manual Page Reference, Volume 2
15. OnCommand™ System Manager 2.0R1 Quick Start Guide
16. OnCommand™ System Manager 2.0R1 Help For Use With Data ONTAP® 7-Mode
17. OnCommand® System Manager 2.0.2 Help For Use with Data ONTAP® Cluster-Mode
18. V-Series Systems Installation Requirements and Reference Guide

1.5.2 Logical Scope

The logical boundary of the TOE will be broken down into the following security classes which are further described in sections 6 and 7 of this ST. The logical scope also provides the description of the security features of the TOE. The security functional requirements implemented by the TOE are usefully grouped under Security Function Classes.

1.5.2.1 Security Audit

The TOE keeps track of auditable events through the Audit Log, stored in `/etc/log/auditlog`. An audit log is a record of commands executed at the console or a secure shell (SSH). All the commands executed in a source file script are also recorded in the audit log. Administrative Hypertext Transfer Protocol (HTTP) operations, such as those resulting from the use of System Manager, are logged. All login attempts to access the storage system, with success or failure, are also logged.

In addition, changes made to configuration and registry files are logged. Read-only Application Programming Interfaces (APIs) by default are not logged but an administrator can enable auditing with the `auditlog.readonly_api.enable` option.

For configuration changes, the audit log shows the following information:

- What configuration files were accessed
- When the configuration files were accessed
- What has been changed in the configuration files

For commands executed through the console or an SSH shell, the audit log shows the following information:

- What commands were executed
- Who executed the commands
- When the commands were executed.

The TOE ensures that the audit trail storage is protected by rotating log files as they reach an administrator-configurable maximum size, and overwriting the oldest log file when the audit trail reaches an administrator-configurable maximum size. In addition, the log files are accessible for viewing by an authorized administrator via NFS, CIFS, or HTTPS.

1.5.2.2 User Data Protection

User data protection defines how users connecting to the TOE are allowed to perform operations on objects.

User access to objects controlled by the TOE is governed by the enforcement of the DAC SFP. Access to NTFS-Style files via a CIFS share is authorized locally by file ACEs. Access to NFSv3 UNIX-Style files via an NFSv3 export is authorized locally by file/directory ownership and UNIX-Style security attributes. Access to NFSv4 UNIX-Style files via an NFSv4 export is authorized locally by file ACEs.

The TOE provides authorized administrators with several management interfaces outlined in section 1.5.2.4 to configure end-user network access. The management interfaces provide for the creation of rules that define actions the TOE is to take based on a set of conditions. The conditions and actions affect either the allowed access to user data by end-users (DAC SFP), or the way administrators interact with the TOE.

For more information on the User Data Protection functionality of the TOE, see section 7.1.2.

1.5.2.3 Identification and Authentication

The Identification and Authentication (I&A) functionality of the TOE enforces human administrators to identify and authenticate themselves to the TOE before allowing any modifications to TOE managed TSF Data. Authentication credentials are maintained by the TOE in a local registry.

The TOE enforces minimum password strength requirements. Passwords must have a length of at least 8 characters and contain at least one numeric character and at least two alphabetic characters.

The TOE will lock out an administrator account if the user fails to enter the proper credentials after 6 failed login attempts.

For more information on the I&A functionality of the TOE, see section 7.1.3.

1.5.2.4 Security Management

The TSF management functionality provides the necessary functions to allow a NetApp administrator to manage and support the TSF. Included in this functionality are the rules enforced by the TOE that define access to TOE-maintained TSF Data and its corresponding security attributes, and TSF Functions.

The security attributes include authentication data (used to authenticate end users), roles, security attribute data (used for DAC SFP enforcement) and other TSF data (used for DAC SFP subject security attribute resolution).

The TOE maintains the following roles for users: *root*, *admin*, *power*, *backup*, *compliance*, *audit*, *none*. A “NetApp Administrator” is defined to be any human user who is assigned any of the administrative roles (except for *none*) listed above.

The TSF Functions include the following groups of capabilities (which are defined in detail in Table 22): *login*, *CLI*, *security*, *API*, *compliance*, and *System Manager*.

For more information on the TSF management functionality, see section 7.1.4.

1.5.2.5 Protection of TOE Security Functions

The TOE protects the TOE Security Function (TSF) via the implementation of domain separation made possible by MultiStore virtualization functionality.

For more information on domain separation and Protection of the TSF, see section 7.1.5.

1.5.2.6 TOE Access

The TOE mitigates unauthorized administrator access by automatically terminating administrator sessions after 10 minutes of inactivity at the CLI.

1.5.3 Product Physical and Logical Features and Functionality not included in the TOE

Features and Functionality that are not part of the evaluated configuration of the TOE are:

- Appliance hardware and firmware
- High Availability appliance pairs
- Cluster Mode
- Remote resolution of authentication data via the `nsswitch.conf` `passwd` file (i.e. UNIX LDAP)
- Cross-protocol support (NFS access to NTFS-Style files, CIFS access to UNIX-Style files)
- Shared level ACLs
- Bypass traverse checking option
- Windows Group Policy Objects
- `waf1.root_only_chown` is disabled in the evaluated version (when disabled, file owners, in addition to the root account, can change ownership of files)
- Native File Blocking (File Screening)
- Mixed Qtrees
- Changing a Qtree’s style once the Qtree has been configured
- Remote CLIs accessible via:
- Ethernet connections to an RLM⁹ or a SP¹⁰ or a BMC¹¹ installed in the appliance
- A Telnet session to the appliance
- A remote shell program, such as RSH¹²
- FTP
- Trivial File Transfer Protocol (TFTP)

⁹ RLM – Remote Local Area Network (LAN) Management

¹⁰ SP – Service Processor

¹¹ BMC – Baseboard Management Controller

¹² RSH – Remote Shell

- HTTP (including WebDAV support)

2

Conformance Claims

This section provides the identification for any CC, Protection Profile (PP), and EAL package conformance claims. Rationale is provided for any extensions or augmentations to the conformance claims. Rationale for CC and PP conformance claims can be found in Section 8.1.

Table 4 CC and PP Conformance

Common Criteria (CC) Identification and Conformance	Common Criteria for Information Technology Security Evaluation, Version 3.1, Revision 3, July 2009; CC Part 2 extended; CC Part 3 conformant; PP claim (none); Parts 2 and 3 Interpretations of the CEM ¹³ as of 12/1/2011 were reviewed, and no interpretations apply to the claims made in this ST.
PP Identification	None
Evaluation Assurance Level	EAL2+ Augmented with Flaw Remediation ALC_FLR.3

¹³ Common Evaluation Methodology



Security Problem

This section describes the security aspects of the environment in which the TOE will be used and the manner in which the TOE is expected to be employed. It provides the statement of the TOE security environment, which identifies and explains all:

- Known and presumed threats countered by either the TOE or by the security environment
- Organizational security policies with which the TOE must comply
- Assumptions about the secure usage of the TOE, including physical, personnel and connectivity aspects

3.1 Threats to Security

This section identifies the threats to the IT¹⁴ assets against which protection is required by the TOE or by the security environment. The threat agents are divided into three categories:

- Attackers who are not TOE users: They have public knowledge of how the TOE operates and are assumed to possess a low skill level, limited resources to alter TOE configuration settings or parameters and no physical access to the TOE.
- TOE users: They have extensive knowledge of how the TOE operates and are assumed to possess a high skill level, moderate resources to alter TOE configuration settings or parameters and physical access to the TOE. (TOE users are, however, assumed not to be willfully hostile to the TOE.)
- Agents or processes working either on behalf of attackers or autonomously: They may or may not have knowledge of the public or proprietary TOE configuration settings/parameters. These agents and processes can take many forms, such as bots or botnets designed to exploit common vulnerabilities or deny others access to IT products and services.

All are assumed to have a low level of motivation. The IT assets requiring protection are the TSF¹⁵ and user data saved on or transitioning through the TOE and the hosts on the protected network. Removal, diminution and mitigation of the threats are through the objectives identified in Section 4 Security Objectives. The following threats are applicable to the TOE:

Table 5 Threats

Name	Description
T.MASQUERADE	A TOE user or process may masquerade as another entity in order to gain unauthorized access to data or TOE resources.
T.TAMPER	A TOE user or process may be able to bypass the TOE's security mechanisms by tampering with the TOE or TOE environment.
T.UNAUTH	A TOE user may gain access to security data on the TOE, even though the user is not authorized in accordance with the TOE security policy.
T.DATALOSS	Threat agents may attempt to remove or destroy data collected and produced by the TOE.
T.NO_AUDIT	Threat agents may perform security-relevant operations on the TOE without being held accountable for it.

¹⁴ IT – Information Technology

¹⁵ TSF – TOE Security Functionality

Name	Description
T.IA	Threat agents may attempt to compromise the TOE or network resources controlled by the TOE by attempting actions that it is not authorized to perform on the TOE or network resources.

3.2 Organizational Security Policies

An Organizational Security Policy (OSP) is a set of security rules, procedures, or guidelines imposed by an organization on the operational environment of the TOE. There are no OSPs defined for this ST.

3.3 Assumptions

This section describes the security aspects of the intended environment for the evaluated TOE. The operational environment must be managed in accordance with assurance requirement documentation for delivery, operation, and user guidance. The following specific conditions are required to ensure the security of the TOE and are assumed to exist in an environment where this TOE is employed.

Table 6 Assumptions

Name	Description
A.PEER	Any other systems with which the TOE communicates are assumed to be under the same management control and use a consistent representation for specific user and group identifiers.
A.NETWORK	Security Management shall be provided to protect the Confidentiality and Integrity of transactions on the network.
A.MANAGE	There will be one or more competent individuals assigned to manage the TOE and the security of the information it contains.
A.NO_EVIL_ADM	The system administrative personnel are not hostile and will follow and abide by the instructions provided by the administrator documentation.
A.COOP	Authorized users possess the necessary authorization to access at least some of the information managed by the TOE and are expected to act in a cooperating manner in a benign environment.
A.PROTECT	The processing resources of the TOE critical to the security policy enforcement will be protected from unauthorized physical modification by potentially hostile outsiders.
A.ADMIN_ACCESS	Administrative functionality shall be restricted to authorized administrators.
A.NTP	The IT Environment will be configured to provide the TOE to retrieve reliable time stamps by implementing the Network Time Protocol (NTP).



Security Objectives

Security objectives are concise, abstract statements of the intended solution to the problem defined by the security problem definition (see Section 3). The set of security objectives for a TOE form a high-level solution to the security problem. This high-level solution is divided into two part-wise solutions: the security objectives for the TOE, and the security objectives for the TOE's operational environment. This section identifies the security objectives for the TOE and its supporting environment.

4.1 Security Objectives for the TOE

The specific security objectives for the TOE are as follows:

Table 7 Security Objectives for the TOE

Name	Description
O.ADMIN_ROLES	The TOE will provide administrative roles to isolate administrative actions.
O.AUDIT	The TOE will audit all administrator authentication attempts, whether successful or unsuccessful, as well as TOE user account configuration changes.
O.DAC_ACC	TOE users will be granted access only to user data for which they have been authorized based on their user identity and group membership.
O.ENFORCE	The TOE is designed and implemented in a manner that ensures the security policies can't be bypassed or interfered with via mechanisms within the TOE's scope of control.
O.IA	The TOE will require users to identify and authenticate themselves.
O.MANAGE	The TSF will provide functions and facilities necessary to support the authorized administrators that are responsible for the management of TOE security.
O.STRONG_PWD	The TOE must ensure that all passwords will be at least 8 characters in length and will consist of at least one number and at least two alphabetic characters. Password construction will be complex enough to avoid use of passwords that are easily guessed or otherwise left vulnerable, e.g. names, dictionary words, phone numbers, birthdays, etc. should not be used.
O.INACTIVE	The TOE will terminate an inactive management session after a configurable interval of time.
O.TIMESTAMP	The TOE will provide a reliable timestamp for use by the TOE.

4.2 Security Objectives for the Operational Environment

4.2.1 IT Security Objectives

The following IT security objectives are to be satisfied by the environment:

Table 8 IT Security Objectives

Name	Description
OE.ACCESS	The IT Environment will ensure that users gain only authorized access to the data the IT Environment manages.
OE.ADMIN_ROLES	The IT Environment will provide administrative roles to isolate administrative actions.
OE.ENFORCE	The IT Environment will support the TOE by providing mechanisms to ensure the TOE is neither bypassed nor interfered with via mechanisms outside the TSC.
OE.IA	The IT Environment must require authorized CIFS and NFS Clients to successfully I&A before allowing access to the TOE.
OE.NETWORK	The network path between the TOEs is a trusted channel. The network path between the CLI client and the TOE is a trusted channel.
OE.NTP	The IT Environment will enable the TOE to provide reliable time stamps by implementing the Network Time Protocol (NTP).
OE.SUBJECTDATA	The IT Environment will provide the TOE with the appropriate subject security attributes.

4.2.2 Non-IT Security Objectives

The following non-IT environment security objectives are to be satisfied without imposing technical requirements on the TOE. That is, they will not require the implementation of functions in the TOE hardware and/or software. Thus, they will be satisfied largely through application of procedural or administrative measures.

Table 9 Non-IT Security Objectives

Name	Description
ON.CREDEN	Those responsible for the TOE must ensure that all access credentials, such as passwords, are protected by the users in a manner that maintains IT security objectives.
ON.INSTALL	Those responsible for the TOE and hardware required by the TOE must ensure that the TOE is delivered, installed, configured, managed, and operated in a manner which maintains IT security objectives.
ON.PHYSICAL	Those responsible for the TOE must ensure that those parts of the TOE and the IT Environment critical to security policy are protected from any physical attack that might compromise the IT security objectives.

Name	Description
ON.TRAINED	Those responsible for the TOE will be properly trained and provided the necessary information that ensures secure management of the TOE and the IT Environment.



Extended Components

This section defines the extended SFRs and extended SARs met by the TOE. These requirements are presented following the conventions identified in Section 6.1.

5.1 Extended TOE Security Functional Components

This section specifies the extended SFRs for the TOE. The extended SFRs are organized by class. Table 10 identifies all extended SFRs implemented by the TOE

Table 10 Extended TOE Security Functional Requirements

Name	Description
FPT_SEP_EXT.1	TSF domain separation for software TOEs

5.1.1 Class FPT: Extended Protection of the TSF

Families in this class address the requirements for functions to implement domain separation functionality as defined in CC Part 2.

5.1.1.1 Family FPT_SEP_EXT: TSF Domain Separation for Software TOEs

Family Behaviour

This family defines the requirements for domain separation of TSF data. This section defines the extended components for the FPT_SEP_EXT family.

Component Leveling



Figure 4 TSF Domain Separation for Software TOEs family decomposition

The extended FPT_SEP_EXT.1 component is considered to be part of the FPT_SEP_EXT family.

FPT_SEP_EXT.1: TSF Domain Separation for Software TOEs provides the capability of the TOE to maintain a separate security domain to protect it from untrusted objects in the TOE's scope of control. The extended family "FPT_SEP_EXT" was modeled after other FDP SFRs.

Management: FPT_SEP_EXT.1

The following actions could be considered for the management functions in FPT_SEP_EXT.1:

- Physical storage system administrators performing maintenance (deletion, modification, addition) of vFiler units, volumes, users, and groups of users, and their assignment to various vFilers within the TOE's scope of control.
- vFiler (security domain) administrators performing maintenance (deletion, modification, addition) of volumes, users, and groups of users within the security domain's scope of control.

Audit: FPT_SEP_EXT.1

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Maintenance (deletion, modification, addition) of vFiler units, users, and groups of users, and their assignment to various security domains within the TOE's scope of control.

FPT_SEP_EXT.1 TSF Domain Separation for Software TOEs

Hierarchical to: No other components

FPT_SEP_EXT.1.1

The TSF shall maintain a security domain that protects it from interference and tampering by untrusted subjects in the TOE's scope of control.

FPT_SEP_EXT.1.2

The TSF shall enforce separation between the security domains of subjects in the TOE's scope of control.

Dependencies: No Dependencies

5.2 Extended TOE Security Assurance Components

There are no extended TOE Security Assurance Components.



Security Requirements

This section defines the SFRs and SARs met by the TOE. These requirements are presented following the conventions identified in Section 6.1.

6.1 Conventions

There are several font variations used within this ST. Selected presentation choices are discussed here to aid the Security Target reader.

The CC allows for assignment, refinement, selection and iteration operations to be performed on security functional requirements. All of these operations are used within this ST. These operations are performed as described in Part 2 of the CC, and are shown as follows:

- Completed assignment statements are identified using [*italicized text within brackets*].
- Completed selection statements are identified using [underlined text within brackets].
- Refinements are identified using **bold text**. Any text removed is stricken (Example: ~~TSE-Data~~) and should be considered as a refinement. In keeping with these conventions, in the event a refinement is within an assignment, it will be depicted as ***bold italicized*** text, and when a refinement is within a selection, it will be depicted in **bold underlined** text.
- Extended Functional and Assurance Requirements are identified using “_EXT” at the end of the short name.
- Iterations are identified by appending a letter in parentheses following the component title. For example, FAU_GEN.1(a) Audit Data Generation would be the first iteration and FAU_GEN.1(b) Audit Data Generation would be the second iteration.

6.2 Security Functional Requirements

This section specifies the SFRs for the TOE. This section organizes the SFRs by CC class. Table 11 identifies all SFRs implemented by the TOE and indicates the ST operations performed on each requirement.

Table 11 TOE Security Functional Requirements

Name	Description	S	A	R	I
FAU_GEN.1	Audit data generation	✓	✓		
FAU_GEN.2	User Identity Association				
FAU_SAR.1	Audit review		✓		
FAU_SAR.2	Restricted audit review				
FAU_STG.1	Protected audit trail storage	✓			
FAU_STG.4	Prevention of audit data loss	✓	✓		
FDP_ACC.1	Subset access control		✓		
FDP_ACF.1	Security attribute based access control		✓		
FIA_AFL.1	Authentication failure handling	✓	✓		
FIA_ATD.1	User attribute definition		✓		
FIA_SOS.1	Verification of secrets		✓		
FIA_UAU.2	User authentication before any action			✓	

Name	Description	S	A	R	I
FIA_UID.2	User identification before any action			✓	
FMT_MOF.1	Management of security function behaviour	✓	✓	✓	
FMT_MSA.1	Management of security attributes	✓	✓		
FMT_MSA.3	Static attribute initialisation	✓	✓		
FMT_MTD.1(a)	Management of TSF data	✓	✓		✓
FMT_MTD.1(b)	Management of TSF data	✓	✓		✓
FMT_SMF.1	Specification of management functions		✓		
FMT_SMR.1	Security roles		✓		
FPT_SEP_EXT.1	TSF domain separation for software TOEs				
FPT_STM.1	Reliable Time Stamps				
FTA_SSL.3	TSF-initiated termination		✓	✓	

Note: S=Selection; A=Assignment; R=Refinement; I=Iteration

6.2.1 Class FAU: Security Audit

FAU_GEN.1 Audit Data Generation

Hierarchical to: No other components.

FAU_GEN.1.1

The TSF shall be able to generate an audit record of the following auditable events:

- Start-up and shutdown of the audit functions;
- All auditable events, for the [not specified] level of audit; and
- [The events specified in Table 12 below].

FAU_GEN.1.2

The TSF shall record within each audit record at least the following information:

- Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, [the additional event information specified in Table 12 below].

Table 12 FAU_GEN.1.2 Audit Generation Details

SFR Addressed	Auditable Events	Additional Event Information
FIA_UAU.2, FIA_UID.2	Successful local logon	User identity, security domain
FIA_UAU.2, FIA_UID.2	Unsuccessful local logon	User identity supplied, security domain
FMT_SMF.1	User created	User ID ¹⁶ created, User ID of the administrator performing the action, security domain
FMT_SMF.1	User deleted	User ID deleted, User ID of the administrator performing the action, security domain
FMT_SMF.1	Group created	Group created, User ID of the administrator performing the action, security domain
FMT_SMF.1	Group deleted	Group deleted, User ID of the administrator performing the action, security domain
FMT_SMF.1	Group member added	User ID and group associated, User ID of the administrator performing the action, security domain
FMT_SMF.1	Group member deleted	User ID and group disassociated, user ID of the administrator performing the action, security domain

Dependencies: FPT_STM.1 Reliable time stamps

¹⁶ ID - Identifier

FAU_GEN.2 User identity association**Hierarchical to: No other components.****FAU_GEN.2.1**

For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

Dependencies: FAU_GEN.1 Audit data generation**FIA_UID.1 Timing of identification****FAU_SAR.1 Audit review****Hierarchical to: No other components.****FAU_SAR.1.1**

The TSF shall provide [*authorised administrators*] with the capability to read [*all audit information*] from the audit records.

FAU_SAR.1.2

The TSF shall provide the audit records in a manner suitable for the user to interpret the information.

Dependencies: FAU_GEN.1 Audit data generation**FAU_SAR.2 Restricted audit review****Hierarchical to: No other components.****FAU_SAR.2.1**

The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.

Dependencies: FAU_SAR.1 Audit review**FAU_STG.1 Protected audit trail storage****Hierarchical to: No other components.****FAU_STG.1.1**

The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.

FAU_STG.1.2

The TSF shall be able to [prevent] unauthorised modifications to the stored audit records in the audit trail.

Dependencies: FAU_GEN.1 Audit data generation**FAU_STG.4 Prevention of audit data loss****Hierarchical to: FAU_STG.3 Action in case of possible audit data loss****FAU_STG.4.1**

The TSF shall [overwrite the oldest stored audit records] and [*no other actions*] if the audit trail is full.

Dependencies: FAU_STG.1 Protected audit trail storage

6.2.2 Class FDP: User Data Protection

FDP_ACC.1 **Subset access control**

Hierarchical to: **No other components.**

FDP_ACC.1.1

The TSF shall enforce the [DAC SFP] on [the subjects, objects, and operations among subjects and objects listed in Table 13 below].

Table 13 FDP_ACC.1.1 Detail

Subject	Object (Files on the Storage Appliance)			Operation among Subject and Object covered by the DAC SFP
	File Style	File Type	Qtree Type	
NFSv3 Client	NFSv3 UNIX-Style File	Directory, Symbolic Link, Regular File	UNIX Qtree	Create, read, write, execute, delete, change permissions, change ownership
NFSv4 Client	NFSv4 Unix-Style File	Directory, Symbolic Link, Regular File	UNIX Qtree	Create, read, write, execute, delete, change permissions, change ownership
CIFS Client	NTFS-Style File	Directory, Regular File	NTFS Qtree	Create, read, write, execute, delete, change permissions, change ownership

Dependencies: **FDP_ACF.1 Security attribute based access control**

FDP_ACF.1 **Security attribute based access control**

Hierarchical to: **No other components.**

FDP_ACF.1.1

The TSF shall enforce the [DAC SFP] to objects based on the following [the subjects, objects, operations, and associated security attributes listed in Table 14 below:]

Table 14 FDP_ACF.1.1 Detail

Operation	Subject	Object (File)	Subject		Object (file) Security Attribute	Other Objects and Security Attributes used for DAC SFP
			Security Attribute	Other TSF Data		
Create	NFSv3 Client	NFSv3 UNIX-Style file	UNIX User UID, UNIX User GID	UNIX Username	N/A	UNIX Parent Directory UID, UNIX Parent Directory GID and access mode
	NFSv4 Client	NFSv4 UNIX-Style file	UNIX User UID, UNIX User GID	UNIX Username	N/A	UNIX Parent Directory UID, UNIX Parent Directory ACEs

Operation	Subject	Object (File)	Subject		Object (file) Security Attribute	Other Objects and Security Attributes used for DAC SFP
			Security Attribute	Other TSF Data		
	CIFS Client	NTFS-Style file	Windows User SID, Windows User GID	Windows Username	N/A	Qtree type, Parent directory's SID and ACEs
Read, Write, Execute	NFSv3 Client	NFSv3 UNIX-Style file	UNIX User UID, UNIX User GID	None	UNIX file UID, UNIX file GID, access mode	None
	NFSv4 Client	NFSv4 UNIX-Style file	UNIX User UID, UNIX User GID	None	UNIX User UID, ACEs	None
	CIFS Client	NTFS-Style file	Windows User SID, Windows User GID	Windows Username	SID and ACEs	None
Delete	NFSv3 Client	NFSv3 UNIX-Style file	UNIX User UID, UNIX User GID	UNIX Username	None	UNIX Parent Directory UID, UNIX Parent Directory GID and access mode
	NFSv4 Client	NFSv4 UNIX-Style file	UNIX User UID UNIX User GID	None	UNIX User UID, ACEs	UNIX Parent Directory UID, UNIX Parent Directory ACEs
	CIFS Client	NTFS-Style file	Windows User SID, Windows User GID	Windows Username	SID and ACEs	Parent directory's SID and ACEs
Change Permission	NFSv3 Client	NFSv3 UNIX-Style file	UNIX User UID, UNIX User GID	UNIX Username	None	UNIX Parent Directory UID, UNIX Parent Directory GID and access mode
	NFSv4 Client	NFSv4 UNIX-Style file	UNIX User UID UNIX User GID	None	UNIX User UID, ACEs	UNIX Parent Directory UID, UNIX Parent Directory ACEs
	CIFS Client	NTFS-Style file	Windows User SID, Windows User GID	Windows Username	SID and ACEs	Parent directory's SID and ACEs
Change Owner	NFSv3 Client	NFSv3 UNIX-Style file	UNIX User UID	None	UNIX User UID	None

Operation	Subject	Object (File)	Subject		Object (file) Security Attribute	Other Objects and Security Attributes used for DAC SFP
			Security Attribute	Other TSF Data		
	NFSv4 Client	NFSv4 UNIX-Style file	UNIX User UID	None	UNIX User UID	None
	CIFS Client	NTFS-Style file	Windows User SID, Windows User GID	None	SID and ACEs	None

FDP_ACF.1.2

The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: *[access is granted if one of the following conditions listed in Table 15 below is true:]*

Table 15 FDP_ACF.1.2 Detail

Operation	Subject	Object (File)	=DAC Rule
Create	NFSv3 Client	NFSv3 UNIX-Style file	<p>1. The subject is the owner of the parent directory and the owner has been granted Write and Execute access (UNIX-Style security attributes).</p> <p>2. The subject is not the owner of the parent directory but is a member of the parent directory's group and the group has Write and Execute access (UNIX-Style security attributes).</p> <p>3. The subject is neither the owner of the parent directory nor a member of the parent directory's group but Write and Execute access has been granted to all subjects (UNIX-Style security attributes).</p>
	NFSv4 Client	NFSv4 UNIX-Style file	<p>4. The subject is the owner of the parent directory and the owner has been granted Write and Execute access (UNIX-Style security attributes).</p> <p>5. There is no parent directory ACE that denies Write or Execute access to the subject and parent directory ACEs exist that grant Write and Execute permission to the subject (NFSv4-Style security attributes).</p> <p>6. There is no parent directory ACE that denies Write or Execute access to any group that the subject is a member of and parent directory ACEs exist that grant Write and Execute permission to any group the subject is a member of (NFSv4-Style security attributes).</p>
	CIFS Client	NTFS-Style file	<p>7. There is no parent directory ACE that denies Write or Execute access to the subject and</p>

Operation	Subject	Object (File)	=DAC Rule
			<p>parent directory ACEs exist that grant Write and Execute permission to the subject (NTFS-Style security attributes).</p> <p>8. There is no parent directory ACE that denies Write or Execute access to any group that the subject is a member of and parent directory ACEs exist that grant Write and Execute permission to any group the subject is a member of (NTFS-Style security attributes).</p>
Read, Write Execute	NFSv3 Client	NFSv3 UNIX-Style file	<p>9. The subject is the owner of the file and the owner has been granted access for the specific operation (UNIX-Style security attributes).</p> <p>10. The subject is not the owner of the file but is a member of the object's group and the object's group has access for the specific operation (UNIX-Style security attributes).</p> <p>11. The subject is neither the owner of the file nor a member of the object's group but the specific access request has been granted to all subjects (UNIX-Style security attributes)</p>
	NFSv4 Client	NFSv4 UNIX-Style file	<p>12. The subject is the owner of the file and the owner has been granted access for the specific operation (UNIX-Style security attributes).</p> <p>13. There is no ACE that denies access to the subject for the specific operation and an ACE exists that grants permission to the subject for the specific operation (NFSv4-Style security attributes).</p> <p>14. There is no ACE that denies access for the specific operation to any group that the subject is a member of and an ACE exists that grants permission to any group the subject is a member of for the specific operation (NFSv4-Style security attributes).</p>
	CIFS Client	NTFS-Style file	<p>15. There is no ACE that denies access to the subject for the specific operation and an ACE exists that grants permission to the subject for the specific operation (NTFS-Style security attributes).</p> <p>16. There is no ACE that denies access for the specific operation to any group that the subject is a member of and an ACE exists that grants permission to any group the subject is a member of for the specific operation (NTFS-Style security attributes).</p>
Delete	NFSv3 Client	NFSv3 UNIX-Style file	<p>17. Rule 1, 2 or 3 above is true (subject has Write and Execute UNIX-Style permission for parent directory).</p>

Operation	Subject	Object (File)	=DAC Rule
	NFSv4 Client	NFSv4 UNIX-Style file	18. Rule 12, 13, or 14 above is true (subject has Delete NFSv4-style permission or is UNIX owner for parent directory)
	CIFS Client	NTFS-Style file	19. Rule 15 or 16 above is true for Delete operation (subject has Delete NTFS-Style permission for object). 20. Rule 12 above fails and Rule 14 or 15 below are true (subject has Delete Child NTFS-Style permission for parent directory) 21. There is no parent directory ACE that denies Delete Child access to the subject and a parent directory ACE exists that grants Delete Child permission to the subject (NTFS-Style security attribute). 22. There is no parent directory ACE that denies Delete Child access to any group that the subject is a member of and an object ACE exists that grants Delete Child permission to a group the subject is a member of (NTFS-Style security attribute).
Change Permission	NFSv3 Client	NFSv3 UNIX-Style file	23. Rule 1, 2 or 3 above is true (subject has Write and Execute UNIX-Style permission for parent directory) and rule 6, 7 or 8 above is true for Write operation (UNIX-Style permission for object).
	NFSv4 Client	NFSv4 UNIX-Style file	24. Rule 4, 5, or 6 above is true (subject has Write and Execute NFSv4-Style permission for parent directory) and rule 12, 13, or 14 above is true for Change Permission operation (UNIX and NFSv4 Style permission for object)
	CIFS Client	NTFS-Style file	25. Rule 7 or 8 above is true (subject has Write and Execute NTFS-Style permission for parent directory) and rule 15 or 16 above is true for Change Permission operation (NTFS-Style permission for object).
Change Ownership	NFSv3 Client	NFSv3 UNIX-Style file	26. If the UNIX UID is root, or the owner of the file, the operation is allowed.
	NFSv4 Client	NFSv4 UNIX-Style file	27. Rule 12, 13, or 14 above is true for Change Ownership operation (subject has Change Owner NFSv4-Style permission or is UNIX-Style owner for object)
	CIFS Client	NTFS-Style file	28. Rule 15 or 16 above is true for Change Ownership operation (subject has Change Owner NTFS-Style permission for object).

FDP_ACF.1.3

The TSF shall explicitly authorise access of subjects to objects based on the following additional rules:
[access is granted if the object is a UNIX-Style file and the subject is root].

FDP_ACF.1.4

The TSF shall explicitly deny access of subjects to objects based on the *[following additional rule: access is denied if the subject does not have an Administrative Role]*.

Dependencies: FDP_ACC.1 Subset access control

FMT_MSA.3 Static attribute initialization

6.2.3 Class FIA: Identification and Authentication

FIA_AFL.1 Authentication failure handling

Hierarchical to: No other components.

FIA_AFL.1.1

The TSF shall detect when *[6]* unsuccessful authentication attempts occur related to *[login attempts]*.

FIA_AFL.1.2

When the defined number of unsuccessful authentication attempts has been *[surpassed]*, the TSF shall *[lock the user, except for the root account, out of the system]*.

Dependencies: FIA_UAU.1 Timing of authentication

FIA_ATD.1 User attribute definition

Hierarchical to: No other components.

FIA_ATD.1.1

The TSF shall maintain the following list of security attributes belonging to individual users: *[TOE user name, password, group membership; UNIX User UID and GID; Windows User SID and GID]*.

Dependencies: No dependencies

FIA_SOS.1 Verification of secrets

Hierarchical to: No other components.

FIA_SOS.1.1

The TSF shall provide a mechanism to verify that secrets meet *[the following criteria: at least 8 characters in length and consist of at least one number and at least two alphabetic characters]*.

Dependencies: No dependencies

FIA_UAU.2 User authentication before any action

Hierarchical to: FIA_UAU.1 Timing of authentication

FIA_UAU.2.1

The TSF shall require each ~~user~~ **administrator** to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

Dependencies: FIA_UID.1 Timing of identification

FIA_UID.2 User identification before any action

Hierarchical to: FIA_UID.1 Timing of identification

FIA_UID.2.1

The TSF shall require each ~~user~~ **administrator** to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

Dependencies: No dependencies

6.2.4 Class FMT: Security Management

FMT_MOF.1 Management of security functions behaviour

Hierarchical to: No other components.

FMT_MOF.1.1

The TSF shall restrict the ability to [~~determine the behaviour of, disable, enable, modify the behaviour of~~ **perform**] the functions [Default capability assignments in Table 16 below] to [the roles listed in Table 16 below].

Dependencies: FMT_SMF.1 Specification of management functions

Table 16 Roles maintained by the TOE

Role	Default capability assignments	Summary of default granted capabilities
root	*	Grants all possible capabilities.
Admin	cli-*, api-*, login-*, security-*	Grants all CLI, API, login, and security capabilities.
Power	cli-cifs*, cli-exportfs*, cli-nfs*, cli-useradmin*, api-cifs-*, api-nfs-*, login-telnet, login-http-admin, login-rsh, login-ssh, api-system-api-*	Grants the ability to : Invoke all cifs, exportfs, nfs, and useradmin CLI commands Make all cifs and nfs API calls Log in using Telnet, HTTP, RSH, and SSH sessions
Backup	login-ndmp	Grants the ability to make NDMP requests.
Compliance	cli-cifs*, cli-exportfs*, cli-nfs*, cli-useradmin*, api-cifs-*, api-nfs-*, login-telnet, login-http-admin, login-rsh, login-ssh, api-system-api-*, cli-snaplock*, api-snaplock-*, api-file-*, compliance-*	Grants compliance-related capabilities in addition to all the capabilities granted by the power role. Note: The compliance role is the default role for the Compliance Administrators group. The compliance role cannot be removed from the Compliance Administrators group or added to other groups.
Audit	api-snmp-get, api-snmp-get-next	Grants the ability to make snmp-get and snmp-get-next API calls.
None	none	Grants no administrative capabilities.

FMT_MSA.1 Management of security attributes

Hierarchical to: No other components.

FMT_MSA.1.1

The TSF shall enforce the [DAC SFP] to restrict the ability to [~~modify, delete, add~~] the security attributes [TOE User UID and Primary TOE User GID maintained locally by the TOE] to [an authorised administrator].

Dependencies: FMT_SMF.1 Specification of management functions

FMT_SMR.1 Security roles

[FDP_ACC.1 Subset access control, or

FDP_IFC.1 Subset information flow control]

FMT_MSA.3 Static attribute initialisation**Hierarchical to:** No other components.**FMT_MSA.3.1**

The TSF shall enforce the *[DAC SFP]* to provide *[restrictive]* default values for security attributes that are used to enforce the SFP

FMT_MSA.3.2

The TSF shall allow the *[no authorized identified roles]* to specify alternative initial values to override the default values when an object or information is created.

Dependencies: FMT_MSA.1 Management of security attributes
FMT_SMR.1 Security roles

FMT_MTD.1(a) Management of TSF data**Hierarchical to:** No other components.**FMT_MTD.1.1**

The TSF shall restrict the ability to *[query, modify, delete]* the *[local user account repository]* to *[authorised administrators with the root or Admin role]*

Dependencies: FMT_SMF.1 Specification of management functions

FMT_MTD.1(b) Management of TSF data**Hierarchical to:** No other components.**FMT_MTD.1.1**

The TSF shall restrict the ability to *[modify]* the *[state of the TOE]* to *[authorised administrators with the root or Admin role]*.

Dependencies: FMT_SMF.1 Specification of management functions
FMT_SMR.1 Security roles

FMT_SMF.1 Specification of Management Functions**Hierarchical to:** No other components.**FMT_SMF.1.1**

The TSF shall be capable of performing the following management functions: *[management of security functions behaviour, management of security attributes, and management of TSF data]*.

Dependencies: No Dependencies

FMT_SMR.1 Security roles**Hierarchical to:** No other components.**FMT_SMR.1.1**

The TSF shall maintain the roles: *[root, Admin, Power, Backup, Compliance, Audit, None]*.

FMT_SMR.1.2

The TSF shall be able to associate users with roles.

Dependencies: FIA_UID.1 Timing of identification

6.2.5 Class FPT: Protection of the TSF

FPT_STM.1 Reliable time stamps**Hierarchical to:** No other components.**FPT_STM.1.1**

The TSF shall be able to provide reliable time stamps.

Dependencies: No dependencies.

FPT_SEP_EXT.1 TSF Domain Separation for Software TOEs**Hierarchical to:** No other components**FPT_SEP_EXT.1.1**

The TSF shall maintain a security domain that protects it from interference and tampering by untrusted subjects in the TOE'S scope of control.

FPT_SEP_EXT.1.2

The TSF shall enforce separation between the security domains of subjects in the TOE'S scope of control.

Dependencies: No dependencies.

6.2.6 Class FTA: TOE Access

FTA_SSL.3 **TSF-initiated termination**

Hierarchical to: **No other components.**

FTA_SSL.3.1

The TSF shall terminate an interactive session after *[10 minutes of user inactivity at the CLI]*.

Dependencies: **No dependencies**

6.3 Security Assurance Requirements

This section defines the assurance requirements for the TOE. Assurance requirements are taken from the CC Part 3 and are EAL2 augmented with ALC_FLR.3.

Table 17 summarizes the requirements.

Table 17 EAL2 Assurance Requirements

Assurance Requirements	
Class ASE: Security Target evaluation	ASE_CCL.1 Conformance claims
	ASE_ECD.1 Extended components definition
	ASE_INT.1 ST introduction
	ASE_OBJ.2 Security objectives
	ASE_REQ.2 Derived security requirements
	ASE_SPD.1 Security problem definition
	ASE_TSS.1 TOE summary specification
Class ALC : Life Cycle Support	ALC_CMC.2 Use of a CM system
	ALC_CMS.2 Parts of the TOE CM Coverage
	ALC_DEL.1 Delivery procedures
	ALC_FLR.3 Systematic Flaw Remediation
Class ADV: Development	ADV_ARC.1 Security architecture description
	ADV_FSP.2 Security-enforcing functional specification
	ADV_TDS.1 Basic design
Class AGD: Guidance documents	AGD_OPE.1 Operational user guidance
	AGD_PRE.1 Preparative procedures
Class ATE: Tests	ATE_COV.1 Evidence of coverage
	ATE_FUN.1 Functional testing
	ATE_IND.2 Independent testing – sample
Class AVA: Vulnerability assessment	AVA_VAN.2 Vulnerability analysis



TOE Summary Specification

This section presents information to detail how the TOE meets the functional requirements described in previous sections of this ST.

7.1 TOE Security Functions

Each of the security requirements and the associated descriptions correspond to the security functions. Hence, each function is described by how it specifically satisfies each of its related requirements. This serves to both describe the security functions and rationalize that the security functions satisfy the necessary requirements.

Table 18 Mapping of TOE Security Functions to Security Functional Requirements

TOE Security Function	SFR ID	Description
Security Audit	FAU_GEN.1	Audit data generation
	FAU_GEN.2	User Identity Association
	FAU_SAR.1	Audit review
	FAU_SAR.2	Restricted audit review
	FAU_STG.1	Protected audit trail storage
	FAU_STG.4	Prevention of audit data loss
User Data Protection	FDP_ACC.1	Subset access control
	FDP_ACF.1	Security attribute based access control
Identification and Authentication	FIA_AFL.1	Authentication failure handling
	FIA_ATD.1	User attribute definition
	FIA_SOS.1	Verification of secrets
	FIA_UAU.2	User authentication before any action
	FIA_UID.2	User identification before any action
Security Management	FMT_MOF.1	Management of security function behaviour
	FMT_MSA.1	Management of security attributes
	FMT_MSA.3	Static attribute initialisation
	FMT_MTD.1(a)	Management of TSF data
	FMT_MTD.1(b)	Management of TSF data
	FMT_SMF.1	Specification of management functions
	FMT_SMR.1	Security roles
Protection of TOE Security	FPT_SEP_EXT.1	TSF domain separation for

TOE Security Function	SFR ID	Description
Functions		software TOEs
	FPT_STM.1	Reliable Time Stamps
TOE Access	FTA_SSL.3	TSF-initiated termination

7.1.1 Security Audit

The TOE generates audit event records for events involving administrator logons as well as configuration changes, specifically for locally-defined users and groups. The audit function is normally executing any time the TOE is operational and the `options auditlog.enable` parameter is set to “on”. If the audit function is started or stopped, an audit event record is generated. All audit event records include a reliable timestamp.

The TOE ensures that the audit trail storage is protected by rotating log files as they reach an administrator-configurable maximum size, and overwriting the oldest log file when the audit trail reaches an administrator-configurable maximum size.

The maximum size of the audit-log file is specified by the `auditlog.max_file_size` option. The maximum size of an audit entry in the audit-log file is 200 characters. An audit entry is truncated to 200 characters if it exceeds the size limit.

Every Saturday at midnight, the `/etc/log/auditlog` file is copied to `/etc/log/auditlog.0`, `/etc/log/auditlog.0` is copied to `/etc/log/auditlog.1`, and so on. This also occurs if the audit-log file reaches the maximum size specified by `auditlog.max_file_size`.

The system saves audit-log files for six weeks, unless any audit-log file reaches the maximum size, in which case the oldest audit-log file is discarded.

Administrators can access the audit-log files using the NFS or CIFS clients, or using HTTPS. The TOE ensures that the audit trail storage is protected from unauthorized deletion or modification by enforcing role-based permissions to the audit trail as described in Table 19 below:

Table 19 Audit Trail Storage Access by Role

Role	Permission
root	create, read, write, execute, delete, change permission, change owner
Admin	create, read, write, execute, delete, change permission
Power	read
Backup	read
Compliance	read
Audit	none
None	none

To access the log files via NFS, the administrator must mount the root directory `<system_name>:/vol/vol0` to a desired mount point on the management workstation (where `<system_name>` is the short name, Fully Qualified Domain Name (FQDN), or IP address of the storage system). The administrator can then change directories to `<mount point>/etc/log/` to view log

files in a text editor program (where <mount point> is the desired mount point on the management workstation).

To access the log files via CIFS, the administrator must mount the \\<system_name>\C\$ share to a desired drive letter on the management workstation (where <system_name> is the short name, FQDN, or IP address of the storage system). The administrator can then change directories to <drive letter>\etc\log\ to view log files in a text editor program (where <drive letter> is the desired drive letter on the management workstation).

To access the log files via HTTPS, the administrator must ensure that the `httpd.autoindex.enable` option is set to **on** and that the `httpd.admin.access` option is set to **allow administrative access**. The administrator can then point the web browser on the management workstation to `https://<system_name>/na_admin/logs/` to download log files to the management workstation (where <system_name> is the short name, FQDN, or IP address of the storage system). Log files are in Microsoft Windows Event Viewer format (EVT) and can be opened by Windows Event Viewer.

Administrators can also configure auditing for specific file access protocols, and forward audit logs to a remote Syslog log host.

The System Manager generates audit records based on the audit logging level configured in the System Manager. The System Manager enables an authorized administrator to refine the logging output by selecting which type of log statements are output. By default, system logging is set to INFO. An authorized administrator can choose one of the following log levels:

TRACE
DEBUG
INFO
WARN
ERROR
FATAL
OFF

These levels function hierarchically. If the log level is set to OFF indicates no logging of messages. In the evaluated configuration, the audit level cannot be set to OFF. The TRACE level logging includes all logs ranging from DEBUG to FATAL. These audit records include the date and time of the event, the type of event, and the outcome (success or failure) of the event. The System Manager associates each auditable event (command executed) with the identity of the administrator that initiated the event. The System Manager stores the log files on the local machine where the System Manager is installed. The System Manager only displays the following ONTAP logs through the System Manager:

- Sys Log
- Audit Log
- SnapMirror Log

All the logs that are displayed via the System Manager are read only. An authorized administrator cannot modify or delete any logs from the System Manager interface.

TOE Security Functional Requirements Satisfied: FAU_GEN.1, FAU_GEN.2, FAU_SAR.1, FAU_SAR.2, FAU_STG.1, FAU_STG.4

7.1.2 User Data Protection

The TSF mediates access of subjects and objects. The subjects covered by the DAC SFP are NFS Clients and CIFS Clients. The objects covered by the DAC SFP are files (user data). The TOE maintains files with either NTFS-Style security attributes or UNIX-Style security attributes. The access modes covered by the DAC SFP are: create, read, write, execute, delete, change permission and change owner.

The DAC SFP is detailed below:

7.1.2.1 Discretionary Access Control (DAC) Security Function

The DAC SFP protects user data (FDP_ACC.1). The DAC SFP uses the subject type, subject's security attributes, the object, the object's security attributes and the access mode (operation) to determine if access is granted. For some operations, the security attributes of the object's parent directory are also used. The following sections describe the DAC SFP and provide the Security Functional Requirements that meet the Security Function.

7.1.2.1.1 DAC SFP Object Security Attributes

The User Data that is covered by the DAC SFP are files (objects). Each file maintained by the TOE has a file style associated with it. The type of security attributes associated with the file defines a file style. The TOE maintains two styles of files: UNIX-Style files and NTFS-Style files. UNIX-Style files have UNIX-Style security attributes and NTFS-Style files have NTFS-Style security. Each file style is assigned different security attributes that are used by the DAC SFP to determine if access is granted for a subject.

In addition to a file style, each file has a file type. The file types may be directories, symbolic links or regular files. UNIX-Style files may be a directory, a symbolic link or a regular file (FDP_ACC.1). NTFS-Style files do not have symbolic links; therefore, the file type will be either directory or regular file (FDP_ACC.1).

In addition to the file type, the TOE maintains three different storage types: UNIX Qtrees, NTFS Qtrees or mixed Qtrees. A Qtree is a disk space partition. UNIX Qtrees store UNIX-Style files with UNIX-Style security attributes. NTFS Qtrees store NTFS-Style files with NTFS-Style security attributes. Mixed Qtrees store both styles of files. Any file may have either UNIX-Style security attributes or NTFS-Style security attributes associated with them. Mixed Qtrees will not be part of the evaluated configuration. The following sections describe the security attributes associated with the objects.

7.1.2.1.1.1 NFSv3 UNIX-Style File Security Attribute Description

A UNIX-Style file managed by the TOE has eleven security attributes that are used to determine file access. The security attributes include a UNIX File UID, a UNIX file GID and a nine character access mode string. The UNIX File UID is the UID of the file's owner. The UNIX file GID is the GID associated with the file. The access mode is a subset of characters within the file's file permission string. The file permission string is represented in ten characters common to all UNIX files (e.g. drwxrwxrwx). The first character contains one of three characters that identify the file type: d for directory, l for a symbolic link, or a dash (-) indicates the file is a regular file. The following 9 characters represent the access mode for the file in three sets of rwx triplets. The first triplet specifies the permission for the file's owner (UID). The next triplet specifies the permissions for the group associated with the file (UNIX file GID). The last three characters specify the permission for the users who are neither the owner nor members of the file's group (other). The rwx triplet identifies the permission for that set (owner, group, other). The three characters represent Read, write or execute privileges. If the character is a dash, the set does not have permissions to perform the specific action (FDP_ACF.1). A directory's permission string may also contain a "sticky bit" represented at the end of the nine character access mode string by a "T" (e.g. drwxrwxrwxT). A sticky bit-enabled directory signifies that files or folders created within this directory can only be deleted by the file owner.

To determine if a client has read, write or execute permission for a UNIX-Style file, the TOE first compares the client's UNIX User UID with the file's UID. If a match occurs (the client is the owner) and the file's access mode specifies permission for the specific access request (rwx), the request is allowed. If

the owner does not have permission to perform the request, the request is denied. If the client is not the file's owner, the TOE determines if the client is a member of the file's group by comparing the client's Primary UNIX User GID to the file's GID. If the client is a member of the file's group and the access mode specifies permission for the specific access request, the request is allowed. If the group does not have permission to perform the request, the request is denied. If the client is not the file's owner or a member of the file's group, the TOE then determines if all others (the last triplet) have permission to perform the request. If all others have permission, the request is honored. Otherwise the request is denied (FDP_ACF.1).

For the remainder of this document, when the DAC SFP rules state that the TOE determines if a client, using UNIX-Style security attributes, has access, the above steps are what the TOE performs: the TOE walks through the owner, group and other attributes to determine access.

7.1.2.1.1.2 NFSv4 UNIX-Style File

The TOE's NFSv4 UNIX-Style file security attributes are NFSv4 ACLs. Each file has a data structure associated with it containing the file owner's UID and an ACL. Each ACL consists of one or more ACE. Each ACE explicitly allows or denies access to a single user or group. Access is allowed if there is no ACE that denies access to the user or any group that the user is a member of and if an ACE exists that grants permission to the user or any group the user is a member of.

This determination is made by consulting the ownership, permissions, and ACEs on the file or directory and comparing against the UID and GID of the requesting user. The group memberships (and possibly username to UID number mapping) are obtained from local files or a directory service, while the file permissions and ACLs are stored in the file system.

For the remainder of this document, when the DAC SFP rules state that the TOE determines if a client, using NFSv4 UNIX-Style security attributes, has access, the above steps are what the TOE performs to determine access.

7.1.2.1.1.3 NTFS-Style File Security Attributes Description

The TOE's NTFS-Style file security attributes are standard Windows file security attributes. Each file has a data structure associated with an SD. This SD contains the file owner's SID, group's SID, DACL¹⁷, and SACL¹⁸. Each ACL consists of one or more ACEs. Each ACE explicitly allows or denies access to a single user or group. Access is allowed if there is no ACE that denies access to the user or any group that the user is a member of and if an ACE exists that grants permission to the user or any group the user is a member of.

For the remainder of this document, when the DAC SFP rules state that the TOE determines if a client, using NTFS-Style security attributes, has access, the above steps are what the TOE performs to determine access.

7.1.2.1.2 DAC SFP Access Requests

Access requests define what operation a subject requests to perform on an object. The TOE's DAC SFP addresses seven access requests: create, read, write, execute, delete, change permissions, and change owner (FDP_ACC.1). The following sections define the operations.

7.1.2.1.2.1 UNIX-Style Access Requests

The following table identifies the operations of subjects on UNIX-Style files (objects) covered by the DAC SFP and explains what each of the file access request means.

¹⁷ DACL – Discretionary ACL: Used to determine permissions.

¹⁸ SACL – System ACL: Used for auditing purposes.

Table 20 UNIX Style File Access Requests

DAC SFP Operation	UNIX-Style File Types		
	Directory	Symbolic Link	Normal File
Create	Create a directory.	Create a symbolic link.	Create a file.
Read	Get info about the directory or its contents.	Read the file the symbolic link contains the name of.	Read the file.
Write	Add a file in the directory.	Write to the file the symbolic link contains the name of.	Append/write/truncate the file.
Execute	Traverse the directory; change the working directory or access a file or subdirectory in the directory.	Execute the file the symbolic link contains the name of.	Execute the file.
Delete	Delete the directory.	Delete the symbolic link.	Delete the file.
Change Permission	Change the permission of the directory.	Change the permission of the symbolic link.	Change the permission of the file.
Change Owner	No effect.	Become the symbolic link's owner.	Become the file's owner.

7.1.2.1.2.2 NTFS-Style File Access Requests

The NTFS-Style file security attributes define more access modes than UNIX does. There are, however, no symbolic links in NTFS-Style files. The following table identifies the operations of subjects on NTFS-Style files (objects) covered by the DAC SFP and explains what each of the basic file access request means.

Table 21 NTFS Style File Access Requests

DAC SFP Operation	NTFS-Style File Types	
	Directory	Normal File
Create	Create a directory	Create a file.
Read	Get info about the directory or its contents	Read the file.
Write	Add a file in the directory	Truncate, append, or overwrite the file.
Execute	No effect	If the file has an extension of .exe or .com, attempt to execute it as a native binary. If it has an extension of .bat or .cmd, attempt to execute it as a batch or command file using the command interpreter.
Delete	Delete the directory. Delete privilege must	Delete the file.

DAC SFP Operation	NTFS-Style File Types	
	Directory	Normal File
	be explicitly granted on the contained files and subdirectories before they can be deleted. A directory may not be deleted unless it is empty.	
Change Permission	Change the permissions on the directory (change the directory's ACL)	Change the file's ACL.
Change Owner	Become the directory's owner	Become the file's owner.

7.1.2.1.3 DAC Operations and Rules

In general the TOE supports access to all objects from all subjects. However, the following exceptions do apply:

- **Client** The DAC SFP supports client protocol-specific support for create, read, write, execute, delete, change permission and change owner operations.
- **File Style** The file style (UNIX-Style or NTFS-Style) is considered in the TOE's DAC SFP Rules because the type of security attributes maintained by the object aids in determining the type of security attributes required by the client.
- **File Type** The file type (directory, symbolic link or regular file) is considered when determining if object access is allowed for a subject. The CIFS protocol does not know about symbolic links. Therefore, CIFS Clients will not request an operation for a symbolic link; the only operations for objects with file type of symbolic link applicable to the DAC SFP are NFS Client operations for UNIX-Style files.
- **Additional Data** As well as client security attributes and object security attributes, certain operations require the TOE to examine the security attributes of other objects to determine if access is allowed, specifically, the object's parent directory. The TOE examines the security attributes of an object's parent directory for create, delete and change permission operations.
- **Operation** The operations supported by the DAC are: Create, Read, Write, Execute, Delete, Change Permissions, and Change Owner. The execute command is treated differently for the different file styles and file types. Executing an NTFS directory has no effect. Executing a UNIX-Style directory means to traverse the directory; change the working directory, or access a file or subdirectory in the directory.

7.1.2.1.4 DAC SFP Subject Security Attributes

The subjects that apply to the DAC SFP are subjects with or without administrative roles; they access the TOE as NFS Clients and CIFS Clients (FDP_ACC.1). To determine if access is permitted for an object, the TOE requires the security attributes associated with the client. These security attributes may be resolved by the TOE or the IT Environment.

The subject security attributes required by the DAC SFP depend on the type of security attributes maintained by the object; the object will require either UNIX-Style subject security attributes or NTFS-Style subject security attributes to determine if access is permitted. Based on the native systems, NFS clients are typically associated with UNIX-Style security attributes and CIFS Clients are associated with NTFS-Style security attributes. The following sections describe the TOE's subject security attribute resolution used to enforce the DAC SFP.

7.1.2.1.5 Derivation of UNIX-Style Client Subject Security Attributes

If the TOE determines that NFSv3 UNIX-Style security attributes should be used to determine access for an object, the TOE requires a client's (subject's) UNIX User UID and UNIX User GID (FDP_ACF.1).

If the TOE determines that the NFSv4 UNIX-Style security attributes should be used to determine access for an object, the TOE requires a client's (subject's) UNIX User UID and GID with permission matching the file's ACL (FDP_ACF.1).

If the access request is initiated by an NFS Client, the TOE received the NFS Client's UNIX User UID in the NFS request (IT Environment). The TOE then searches the IT Environment to get the UNIX User GID and UNIX username (FDP_ACF.1).

7.1.2.1.5.1 Derivation of NTFS-Style Client Subject Security Attributes

If the TOE determines that NTFS-Style security attributes should be used to determine access for an object, the TOE requires two subject security attributes: a Windows User SID and a Windows User GID.

If the access request is initiated by a CIFS Client, the TOE obtained the CIFS Client's username (Windows username) when the client logged onto the remote system and joined the Windows Domain. In addition to this, the IT Environment queried the domain controller to obtain the Windows User SID and the Windows User GID.

7.1.2.1.6 DAC SFP Rules

The DAC SFP rules that apply depend on the subject, the operation, and the object. In addition, the objects file type (directory, symbolic link and regular) is used to determine access and the type of Qtree the file is stored in. The six access modes under the control of the TOE DAC SFP are described below.

Create Access Request

To determine if a client has permissions to create a file, the TOE first looks at the parent directory's security attributes.

If the parent directory is NTFS-Style, the TOE uses NTFS-Style security attributes for both subject and object to determine if access is permitted. If the client does not have write and execute privileges to the parent directory, the request is denied. If the client has write and execute privileges for the parent directory, the file is created (FDP_ACF.1). In an NTFS Qtree, the new file inherits the NTFS-Style security attributes from the parent directory (FMT_MSA.3).

If the parent directory is NFSv3 UNIX-Style, the TOE uses NFSv3 UNIX-Style security attributes for both subject and object to determine access. If the client does not have write and execute privileges to the parent directory, the request is denied. If the client has write and execute privileges for the parent directory, the file is created (FDP_ACF.1). In a UNIX Qtree, the new file's NFSv3 UNIX-Style security attributes are determined by the file mode creation mask, also known as the User Mask (umask) of the user-owned process creating the file (FMT_MSA.3).

If the parent directory is NFSv4 UNIX-Style, the TOE uses NFSv4-Style ACL security attributes for the object, and UNIX user UID and GID for the subject. If the client has write and execute privileges for the parent directory, the file is created (FDP_ACF.1). In an NFSv4 UNIX-Style Qtree, the new file inherits the NFSv4 UNIX-Style security attributes from the parent directory (FMT_MSA.3).

Read, Write, Execute Access Requests

To determine if a client has permission to read, write or execute a file, the TOE first examines the client type. If a client requests access to a file with NFSv3 UNIX-Style security attributes, the TOE uses NFSv3 UNIX-Style security attributes for both subject and object to determine if read, write or execute access request is permitted. If the client has read, write or execute permission for the file, access is permitted (FDP_ACF.1). If the client does not have access, the request is denied.

Otherwise, the TOE uses the file's ACL to determine if read, write or execute permission is allowed. The TOE uses NFSv4 or NTFS-Style security attributes for both subject and object to determine access. The TOE determines if the file's ACEs allow permission for the specific request. If they do, access is granted (FDP_ACF.1). If the ACEs do not grant permission, access is denied.

Client Delete Access Request

To determine if a client has permission to delete a file, the TOE looks at the styles of the file and parent directory.

NFSv3 UNIX-Style File stored in a UNIX-Style Parent Directory

The TOE, using NFSv3 UNIX-Style security attributes for both subject and object, determines if the client has write and execute access for the file's parent directory. If the client does, the delete access is permitted (FDP_ACF.1). Otherwise, access is denied.

NFSv4 and NTFS-Style File stored in an NTFS-Style Parent Directory

The TOE, using NFSv4 and NTFS-Style security attributes for both subject and object, first determines if the file's ACL grants the client delete access to the file. If so, access is granted (FDP_ACF.1). If the file's ACEs do not grant delete permission for the client, the TOE determines if the parent directory has a DC (Delete Child) ACE that grants access for the subject. If the parent does, delete access is permitted (FDP_ACF.1). Otherwise, access is denied.

Change Permission Access Requests

To determine if a client has permission to change the permissions of a file, the TOE looks at the styles of the file and parent directory.

NFSv3 UNIX-Style File stored in a UNIX-Style Parent Directory

The TOE, using NFSv3 UNIX-Style security attributes for both subject and object, determines if the client has write and execute access for the file's parent directory. If the client does, and the client also has write access for the file, the change permission access is permitted (FDP_ACF.1). Otherwise, access is denied.

NFSv4 and NTFS-Style File stored in an NTFS-Style Parent Directory

The TOE, using NFSv4 and NTFS-Style security attributes for both subject and object, determines if the file's ACL grants the client change permission access to the file. If so, the TOE determines if the parent directory's ACL grants write and execute access for the subject. If so, change permission access is permitted (FDP_ACF.1). Otherwise, access is denied.

Change Owner Access Requests

The DAC SFP distinguishes between the NFS Client Change Owner (chown) UNIX command and the CIFS Client Change Owner (Change Ownership) command.

NFSv3 Clients

If an NFSv3 Client requests a Change Owner request (chown) for an NTFS-Style file, the request is denied (FDP_ACF.1). If an NFS Client sends a Change Owner request (chown) for an NFSv3 UNIX-Style directory, the request is denied. For other UNIX-Style file types, the TOE determines if the client is root (UNIX User UID is root UID) or the file owner. If the client is root or the file owner, access is allowed (FDP_ACF.1) and the TOE changes the object's owner to the owner specified in the chown request. If the object had an ACL, the TOE removes the ACL.

NFSv4 Clients

If an NFSv4 Client requests a Change Owner request for an NTFS-Style file, the request is denied (FDP_ACF.1). If the file is an NFSv4 UNIX-Style file, the TOE determines if the client has Change Owner ACE privileges for the file. If the client does, access is allowed (FDP_ACF.1). The TOE will replace the existing owner ACE with the new ACE sent in the command. If the NFSv4 Client does not have Change Owner privileges, the request is denied.

CIFS Client

If a CIFS client requests a change owner request for a UNIX-Style file, the request is denied (FDP_ACF.1). If the file is an NTFS-Style file, the TOE determines if the client has change owner privileges for the file. If the client does, change is allowed (FDP_ACF.1). The TOE will replace the existing owner with the new owner sent in the command. If the CIFS client does not have change owner privileges, the request is denied.

TOE Security Functional Requirements Satisfied: FDP_ACC.1, FDP_ACF.1

7.1.3 Identification and Authentication

The TOE's I&A functionality enforces human administrators to identify and authenticate themselves to the TOE before allowing any modifications to TOE managed TSF Data (FIA_UID.2, FIA_UAU.2).

Administrators' authentication credentials are maintained by the TOE in a local registry. The file contains the username, password, full name, password aging, role, and other similar characteristics for each administrator. Authentication credentials are maintained by the TOE in a local registry. Several roles exist for administrator authentication: *root*, *admin*, *power*, *backup*, *compliance*, and *audit*.

The TOE enforces minimum password strength requirements. Passwords must have a length of at least 8 characters and contain at least one numeric character and at least two alphabetic characters (FIA_SOS.1). The TOE also maintains the following attributes for administrative accounts: *TOE user name*, *password*, *group membership*, *UNIX User UID and GID*, and *Windows User SID and GID* (FIA_ATD.1).

Administrators are authenticated locally using role based access control.

The TOE will lock out an administrator account if the user fails to enter the proper credentials after 6 failed login attempts (FIA_AFL.1).

TOE Security Functional Requirements Satisfied: FIA_AFL.1, FIA_ATD.1, FIA_SOS.1, FIA_UAU.2, FIA_UID.2

7.1.4 Security Management

The Administrative Security Function provides the necessary functions, or capabilities, to allow a NetApp administrator to manage and support the TSF. Included in this functionality are the rules enforced by the TOE that define access to TOE-maintained TSF Data and TSF Functions. The TSF Functions are categorized into the groups of capabilities listed in Table 22 below:

Table 22 Security Functions Capabilities

Capability Type	Capabilities
Login	<p>Grants the specified role login capabilities.</p> <p>Login-* grants the specified role the capability to log in through all supported protocols.</p> <p>Login-protocol grants the specified role the capability to log in through a specified protocol. Supported protocols include the following:</p> <p>login-console grants the specified role the capability to log in to the storage system using the console.</p> <p>Login-ndmp grants the specified role the capability to make NDMP requests.</p> <p>Login-snmp grants the specified role the capability to log in to the storage system using SNMPv3.</p> <p>Login-ssh grants the specified role the capability to log in to the storage system using SSH.</p>
CLI	<p>Grants the specified role the capability to execute one or more Data ONTAP command line interface (CLI) commands.</p> <p>cli-* grants the specified role the capability to execute all supported CLI commands.</p> <p>cli-cmd* grants the specified role the capability to execute all commands associated with the CLI command cmd.</p> <p>Note: Users with cli capability also require at least one login capability to execute CLI commands.</p>
Security	<p>Grants the specified role security-related capabilities, such as the capability to change other users' passwords or to invoke the CLI priv set advanced command.</p> <p>Security-* grants the specified role all security capabilities</p> <p>security-capability grants the specified role one of the following specific security capabilities:</p> <p>security-passwd-change-others grants the specified role the capability to change the passwords of all users with equal or fewer capabilities.</p> <p>Security-priv-advanced grants the specified role the capability to access the advanced CLI commands.</p> <p>Security-load-lclgroups grants the specified role the capability to reload the lclgroups.cfg file.</p> <p>Security-complete-user-control grants the specified role the capability to create, modify, and delete users, groups, and roles with greater capabilities.</p>
API	<p>Grants the specified role the capability to execute Data ONTAP API calls.</p> <p>Api-* grants the specified role all API capabilities.</p> <p>Api-api_call_family-* grants the specified role the capability to call all API routines in the family api_call_family.</p> <p>Api-api_call grants the specified role the capability to call the API routine api_call.</p>

Capability Type	Capabilities
Compliance	<p>Grants the specified role the capability to execute compliance-related operations.</p> <p>Compliance-* grants the specified role the capability to execute all compliance-related operations.</p> <p>Compliance-privileged-delete grants the specified role the capability to execute privileged deletion of compliance data.</p> <p>Note: The compliance capabilities (compliance-*) are included in the default capabilities of the compliance role. The compliance capabilities cannot be removed from the compliance role or added to other roles.</p>

Only end users associated with the specific roles as outlined in Table 16 may modify the association between users, groups, and any of the above capabilities.

The TOE provides several interfaces for administrators to use to manage the behavior of the TSFs. The various management interfaces available to administrators are outlined below:

CLI

Local CLI available via a serial terminal connected to the console port of the appliance

Remote CLI available via a secure shell program, such as SSH, OpenSSH, PuTTY, etc.

(See section 1.5.3 for a list of other methods of accessing the CLI which are not included in the evaluated configuration of the TOE)

System Manager GUI

The System Manager GUI is installed on a separate management workstation. The System Manager GUI makes API calls to the System Administration TOE component for management of the TOE security functions.

Editing of Configuration Files

By mounting the root directory of the storage system on a UNIX workstation

By mounting the C\$ share of the storage system on a Windows workstation

7.1.4.1 Management of Security Attributes

The TOE protects TSF data via the implementation of the DAC SFP as described in section 7.1.2.1 above. The security attributes upon which the DAC SFP relies for access control are configurable only by users who are owners of the object or users who are assigned the *root*, *admin*, or *power* role.

The management of security attributes is performed by editing the attributes of individual objects such as the SD of NTFS-Style files, the ACL of NFSv4 UNIX-Style files, or the nine character access mode string of NFSv3 UNIX-Style files, by editing the file's group membership, or by editing a user's membership in a group. For more information on the security attributes of TSF data, see section 7.1.2.1.1 and its subsections above.

7.1.4.2 Management of TSF Data

The TOE's Administration Security Function includes TSF Data Management. The TSF Data Management includes management of both authentication data and security attributes. The following data is managed by the TOE:

- TOE Username Management.

- Deny unauthorized administrative login attempts via Data ONTAP.
- Implement a “Sleep Mode” function call to Data ONTAP to deny access and initiate a time out period for further login attempts, to counter brute force password guessing.

TOE Username Management

The TOE maintains authentication data locally that is used to authenticate the NetApp Administrators. This authentication database can only be accessed through the useradmin command.

7.1.4.3 Management of Roles

The TOE maintains the following roles for users: *root*, *admin*, *power*, *backup*, *compliance*, *audit*, *none*. The *root* and *admin* roles have the default capability to administratively access the TOE and modify security attributes. The other administrative roles have varying functionality as defined in Table 16.

NetApp Administrators are required to identify and authenticate themselves to the TOE. The authentication data used for I&A, username and password, is maintained locally by the TOE; administration of user authentication data by the IT Environment is not supported. NetApp Administrators are allowed to modify TOE-managed TSF data including authentication data, security attributes and other TSF Data.

Non-administrators are users who access the TOE via a remote system using NFS or CIFS client software (process acting on behalf of a user). Non-administrators have access to TOE managed user data, but do not have authority to modify TOE managed TSF data. Access to TOE managed user data by non-administrators is covered by the TOE’s DAC SFP.

TOE Security Functional Requirements Satisfied: FMT_MOF.1, FMT_MSA.1, FMT_MSA.3, FMT_MTD.1(a), FMT_MTD.1(b), FMT_SMF.1, FMT_SMR.1

7.1.5 Protection of the TSF

The TOE protects the TOE Security Function (TSF) via the implementation of domain separation made possible by MultiStore virtualization functionality.

MultiStore enables administrators to partition the storage and network resources of a single storage system so that it appears as multiple storage systems on the network. MultiStore is an individually licensed software feature of Data ONTAP® v8.1.1 7-Mode. Each virtual storage controller created as a result of partitioning is called a vFiler™ unit, while the physical storage controller is known as the host storage system.

A virtual storage controller is a lightweight instance of a multiprotocol server. Physical resources of the storage system such as system memory and processor are shared between virtual storage controllers. A virtual storage controller consists of data stored in a volume or a Qtree, the IP address(es) necessary to reach the virtual storage controller, and the security and other attributes associated with the data. From the client systems and management software perspective the data is completely secured and isolated from all other virtual storage controllers.

As illustrated in Figure 5 below, a virtual storage controller’s configuration allows it to store and retrieve data in the correct context in its storage units. This information also allows the virtual storage controller to correctly interpret the access control and security-related metainformation embedded in its storage.

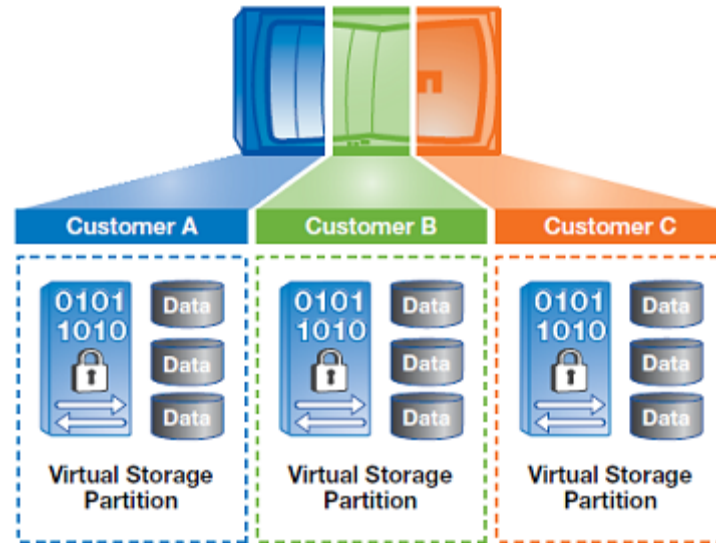


Figure 5 Multistore enables secure multi-tenancy for shared storage implementations

Enabling a MultiStore license will create a virtual storage controller named “vFiler0”. “vFiler0” is referred to as a default virtual storage controller and cannot be renamed. Any other virtual storage controller created on the storage system is referred to as a nondefault virtual storage controller. The “vFiler0” unit owns all the resources of the storage system. When administrators create vFiler units and assign resources to them, the resources are assigned from “vFiler0”. Therefore, “vFiler0” owns all resources that are not owned by nondefault vFiler units.

A virtual storage controller configuration includes the following:

- Quota, exports, and log information
- Configuration for hosts, DNS, and NIS
- CIFS domain info, local users, groups, shares
- The subset of storage system options that are specific to a virtual storage controller
- Virtual storage controller registry data

Administrators of vFiler unit can manage all vFiler units that they are authorized to access. However, vFiler unit administrators have access rights different from those of storage system administrators. The hosting storage system administrator can access all the data contained in a vFiler unit by using the vfiler context or the vfiler run commands. However, after assigning a Qtree or volume to a vFiler unit, the hosting storage system administrator no longer has access to the data in that Qtree or volume.

The system clock is set at boot via the Network Time Protocol and provides reliable timestamps for use by the TOE.

TOE Security Functional Requirements Satisfied: FPT_SEP_EXT.1, FPT_STM.1

7.1.6 TOE Access

The TOE mitigates unauthorized administrator access by automatically terminating administrator sessions after 10 minutes of inactivity at the CLI.

TOE Security Functional Requirements Satisfied: FTA_SSL.3

8

Rationale

8.1 Conformance Claims Rationale

This Security Target conforms to Part 2 extended and Part 3 conformant of the Common Criteria Standard for Information Technology Security Evaluations, Version 3.1 Revision 3. This ST does not conform to a PP.

8.2 Security Objectives Rationale

This section provides a rationale for the existence of each threat, policy statement, and assumption that compose the Security Target. Sections 8.2.1 and 8.2.2 demonstrate the mappings between the threats, policies, and assumptions to the security objectives are complete. The following discussion provides detailed evidence of coverage for each threat, policy, and assumption.

8.2.1 Security Objectives Rationale Relating to Threats

Table 23 Threats: Objectives Mapping

Threats	Objectives	Rationale
T.MASQUERADE A TOE user or process may masquerade as another entity in order to gain unauthorized access to data or TOE resources.	O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	Access to the TOE or network resources controlled by the TOE will only be granted to user accounts associated with the root, admin, power, backup, compliance, or audit role. This prevents threat agents from gaining unauthorized access to the TOE or network resources.
	O.DAC_ACC TOE users will be granted access only to user data for which they have been authorized based on their user identity and group membership.	The TOE will prevent access to TSF data by users masquerading as other entities by implementing discretionary access control. Users shall be granted access only to data for which they have been authorized based on their user identity and group membership.
T.TAMPER A TOE user or process may be able to bypass the TOE's security mechanisms by tampering with the TOE or TOE environment.	O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	The TOE will monitor attempts to access configuration data or other trusted data that could result in system failure resulting in unauthorized access to trusted data. Authorized roles are required for users to perform administrative procedures, thus isolating the amount of damage a user can perform.
	O.IA The TOE will require users to identify and authenticate	The TOE will monitor attempts to access configuration data or other trusted data that could result in

Threats	Objectives	Rationale
	themselves.	system failure resulting in unauthorized access to trusted data. Users are required to identify and authenticate themselves to the TOE before attempting to modify TSF data or administrative functions.
	O.MANAGE The TSF will provide functions and facilities necessary to support the authorized administrators that are responsible for the management of TOE security.	The TOE will have defined methods and permissions for modification of configuration data.
	O.STRONG_PWD The TOE must ensure that all passwords will be at least 8 characters in length and will consist of at least one number and at least two alphabetic characters. Password construction will be complex enough to avoid use of passwords that are easily guessed or otherwise left vulnerable, e.g. names, dictionary words, phone numbers, birthdays, etc. should not be used.	The TOE will have defined password rules that require strong passwords. The default password rules require passwords that are at least 8 characters in length and consist of at least one numeric and as least two alphabetic characters.
	OE.ACCESS The IT Environment will ensure that users gain only authorized access to the data the IT Environment manages.	The IT Environment will monitor attempts to access configuration data or other trusted data that could result in system failure resulting in unauthorized access to trusted data.
	OE.ADMIN_ROLES The IT Environment will provide administrative roles to isolate administrative actions.	The IT Environment will monitor attempts to access configuration data or other trusted data that could result in system failure resulting in unauthorized access to trusted data. Authorized roles are required for users to perform administrative procedures, thus isolating the amount of damage a user can perform.
T.UNAUTH A TOE user may gain access to security data on the TOE, even though the user is not authorized in accordance with the TOE security policy.	O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	The TOE will require authorized roles for users to perform administrative procedures therefore, isolating the amount of damage a user can perform.
	O.ENFORCE The TOE is designed and	The TOE will ensure the security policy enforcement of the TOE is

Threats	Objectives	Rationale
	implemented in a manner that ensures the security policies can't be bypassed or interfered with via mechanisms within the TOE's scope of control.	invoked and not interfered with inside the TOE.
	O.IA The TOE will require users to identify and authenticate themselves.	The TOE will require users to identify and authenticate themselves before attempting to modify TSF data or security attributes.
	O.MANAGE The TSF will provide functions and facilities necessary to support the authorized administrators that are responsible for the management of TOE security.	The TOE will have defined methods and permissions for modification of configuration data.
	O.INACTIVE The TOE will terminate an inactive management session after a configurable interval of time.	The TOE will prevent users from gaining access to security data on the TOE, even though the user is not authorized in accordance with the TOE security policy, by terminating an inactive management session after a configurable interval of time.
	OE.ACCESS The IT Environment will ensure that users gain only authorized access to the data the IT Environment manages.	The IT Environment will enforce restrictive access and modification rules for security attributes and TSF Data managed by the IT Environment and used by the TOE to enforce the DAC SFP.
	OE.ADMIN_ROLES The IT Environment will provide administrative roles to isolate administrative actions.	The IT Environment will require authorized roles for users to perform administrative procedures thus, isolating the amount of damage a user can perform.
	OE.ENFORCE The IT Environment will support the TOE by providing mechanisms to ensure the TOE is neither bypassed nor interfered with via mechanisms outside the TSC.	The IT Environment will ensure the security policy enforcement of the TOE is invoked and not interfered with outside the TOE.
T.DATALOSS Threat agents may attempt to remove or destroy data collected and produced by the TOE.	O.IA The TOE will require users to identify and authenticate themselves.	The TOE will mitigate unauthorized attempts to remove or destroy data collected and produced by the TOE by requiring that access to subject data is granted only after a user has been identified and authenticated.

Threats	Objectives	Rationale
T.NO_AUDIT Threat agents may perform security-relevant operations on the TOE without being held accountable for it.	O.AUDIT The TOE will audit all administrator authentication attempts, whether successful or unsuccessful, as well as TOE user account configuration changes.	The TOE will prevent a threat agent from performing a security-related action without being held accountable by auditing all security-related activity on the TOE and associating users with those activities.
	O.TIMESTAMP The TOE will provide a reliable timestamp for use by the TOE.	The TOE will prevent a threat agent from performing a security-related action without being held accountable by auditing all security-related activity on the TOE and recording the time those activities were performed.
	OE.NTP The IT Environment will enable the TOE to provide reliable time stamps by implementing the Network Time Protocol (NTP).	The IT Environment will ensure that the TOE is able to perform reliable auditing by ensuring that the timestamp is reliable through the implementation of the Network Time Protocol.
T.IA Threat agents may attempt to compromise the TOE or network resources controlled by the TOE by attempting actions that it is not authorized to perform on the TOE or network resources.	O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	The TOE will prevent attempts to compromise the TOE or network resources controlled by the TOE by threat agents attempting actions that they are not authorized to perform by providing an administrator role and restricting access to the resources to users associated with that role.
	O.DAC_ACC TOE users will be granted access only to user data for which they have been authorized based on their user identity and group membership.	The TOE will prevent attempts to compromise the TOE or network resources controlled by the TOE by threat agents attempting actions that they are not authorized to perform by only granting users access to user data for which they have been authorized based on the identity of users and groups of users.
	O.IA The TOE will require users to identify and authenticate themselves.	The TOE will prevent attempts to compromise the TOE or network resources controlled by the TOE by threat agents attempting actions that they are not authorized to perform by requiring users to identify and authenticate themselves.
	OE.IA	The IT Environment will prevent

Threats	Objectives	Rationale
	The IT Environment must require authorized CIFS and NFS Clients to successfully I&A before allowing access to the TOE.	attempts to compromise the TOE or network resources controlled by the TOE by threat agents attempting actions that they are not authorized to perform by requiring users to identify and authenticate themselves.

Every Threat is mapped to one or more Objectives in the table above. This complete mapping demonstrates that the defined security objectives counter all defined threats.

8.2.2 Security Objectives Rationale Relating to Assumptions

Table 24 Assumptions:Objectives Mapping

Assumptions	Objectives	Rationale
A.PEER Any other systems with which the TOE communicates are assumed to be under the same management control and use a consistent representation for specific user and group identifiers.	OE.SUBJECTDATA The IT Environment will provide the TOE with the appropriate subject security attributes.	The security attributes provided by the IT Environment will be meaningful because the representations between the TOE and IT Environment systems are consistent.
A.NETWORK Security Management shall be provided to protect the Confidentiality and Integrity of transactions on the network.	OE.NETWORK The network path between the TOEs is a trusted channel. The network path between the CLI client and the TOE is a trusted channel.	The channel between the TOEs which are replication partners, and the channel between the TOE and the CLI client are trusted channels.
A.MANAGE There will be one or more competent individuals assigned to manage the TOE and the security of the information it contains.	ON.INSTALL Those responsible for the TOE and hardware required by the TOE must ensure that the TOE is delivered, installed, configured, managed, and operated in a manner which maintains IT security objectives.	The TOE will be managed appropriately by one or more competent individuals.
	ON.TRAINED Those responsible for the TOE will be properly trained and provided the necessary information that ensures secure management of the TOE and the IT Environment.	Those responsible for the TOE will be properly trained and provided the necessary information that ensures secure management of the TOE and the IT Environment.
A.NO_EVIL_ADM The system administrative personnel are not hostile and will	ON.INSTALL Those responsible for the TOE and hardware required by the	The TOE will be delivered, installed, managed, and operated by a non-hostile administrator in a

Assumptions	Objectives	Rationale
follow and abide by the instructions provided by the administrator documentation.	TOE must ensure that the TOE is delivered, installed, configured, managed, and operated in a manner which maintains IT security objectives.	manner which maintains IT security objectives.
A.COOP Authorized users possess the necessary authorization to access at least some of the information managed by the TOE and are expected to act in a cooperating manner in a benign environment.	ON.CREDEN Those responsible for the TOE must ensure that all access credentials, such as passwords, are protected by the users in a manner that maintains IT security objectives.	Authorized user will provide for the physical protection of the TOE's access credentials.
A.PROTECT The processing resources of the TOE critical to the security policy enforcement will be protected from unauthorized physical modification by potentially hostile outsiders.	ON.PHYSICAL Those responsible for the TOE must ensure that those parts of the TOE and the IT Environment critical to security policy are protected from any physical attack that might compromise the IT security objectives.	The security critical components of the TOE are protected from physical attacks by ensuring that the TOE is protected from unauthorized physical modification by hostile outsiders.
A.ADMIN_ACCESS Administrative functionality shall be restricted to authorized administrators.	O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	The TOE will provide a distinct role for administrators, thereby enabling administrative functions to be associated with just that role.
	O.IA The TOE will require users to identify and authenticate themselves.	The TOE will provide a mechanism to I&A specific users, which is a prerequisite for associating a role with a user.
	O.MANAGE The TSF will provide functions and facilities necessary to support the authorized administrators that are responsible for the management of TOE security.	The TOE will provide administrative functions that can be restricted to administrative roles.
A.NTP The IT Environment will be configured to provide the TOE to retrieve reliable time stamps by implementing the Network Time Protocol (NTP).	OE.NTP The IT Environment will enable the TOE to provide reliable time stamps by implementing the Network Time Protocol (NTP).	The IT environment will provide the TOE to synchronize a reliable timestamp through NTP.

Every assumption is mapped to one or more Objectives in the table above. This complete mapping demonstrates that the defined security objectives uphold all defined assumptions.

8.3 Rationale for Extended Security Functional Requirements

The TOE contains the following explicitly stated security functional requirements:

- FPT_SEP_EXT.1

FPT_SEP_EXT.1 is an explicitly-stated functional requirement. The SFR family “TSF Domain Separation for Software TOEs” was created to specifically address the separation of virtual storage from each other when running within the TOE, as opposed to separation of the TOE’s domain of execution from outside entities. The SFR in this family has no dependencies since the stated requirement embodies all necessary security functions. This requirement exhibits functionality that can be easily documented in the ADV assurance evidence and thus do not require any additional Assurance Documentation.

8.4 Rationale for Extended TOE Security Assurance Requirements

There are no Extended SARs defined for this ST.

8.5 Security Requirements Rationale

The following discussion provides detailed evidence of coverage for each security objective.

8.5.1 Rationale for Security Functional Requirements of the TOE Objectives

Table 25 Objectives:SFRs Mapping

Objective	Requirements Addressing the Objective	Rationale
O.ADMIN_ROLES The TOE will provide administrative roles to isolate administrative actions.	FMT_SMR.1 Security roles	Defines the user roles implemented by the DAC SFP requiring authorized roles for NetApp Administrators to perform administrative procedures.
O.AUDIT The TOE will audit all administrator authentication attempts, whether successful or unsuccessful, as well as TOE user account configuration changes.	FAU_GEN.1 Audit data generation	Requires the TOE to generate audit event records for administrator logons and configuration changes, and defines the information saved in these records.
	FAU_GEN.2 User Identity Association	Requires the TOE to associate a specific user with the audit event records.
	FAU_SAR.1 Audit review	Requires the TOE to allow users to review audit event records.

Objective	Requirements Addressing the Objective	Rationale
	FAU_SAR.2 Restricted audit review	Requires the TOE to only allow administrators to review audit event records.
	FAU_STG.1 Protected audit trail storage	Requires the TOE to restrict the ability to modify or delete the audit trail to administrators, and to detect any such behavior by auditing all management operations.
	FAU_STG.4 Prevention of audit data loss	The TOE will continue to audit management activity if the audit trail is full by backing up the current audit trail, deleting the oldest audit trail file, and creating a new audit trail file.
O.DAC_ACC TOE users will be granted access only to user data for which they have been authorized based on their user identity and group membership.	FDP_ACC.1 Subset access control	Identifies the subjects, objects, and operation of subjects on objects covered by the DAC SFP.
	FDP_ACF.1 Security attribute based access control	Identifies the subject and object security attributes used to enforce the DAC SFP, and defines the DAC rules enforced by the TOE that define access rules for TOE managed user data.
	FMT_MSA.3 Static attribute initialisation	Ensures restrictive default values are defined for the TOE's object security attributes used to enforce the DAC SFP.
O.ENFORCE The TOE is designed and implemented in a manner that ensures the security policies can't be bypassed or interfered with via mechanisms within the TOE's scope of control.	FPT_SEP_EXT.1 TSF domain separation for software TOEs	The TOE tracks user sessions individually and enforces the TSP appropriately for each session. User sessions cannot interfere with one another within the TOE. Without this assurance, there would not be assurance that the TOE could not be interfered with.
O.IA The TOE will require users to identify and authenticate themselves.	FIA_AFL.1 Authentication failure handling	Protects the TOE from malicious brute-force and dictionary password attacks by locking out accounts after a configurable number of failed login attempts.
	FIA_UAU.2 User authentication before any action	Ensures that users must authenticate themselves before any TSF mediated access to the TOE functions or TSF data is allowed.
	FIA_UID.2	Ensures that users must identify

Objective	Requirements Addressing the Objective	Rationale
	User identification before any action	themselves before any TSF mediated access to the TOE functions or TSF data is allowed.
O.MANAGE The TSF will provide functions and facilities necessary to support the authorized administrators that are responsible for the management of TOE security.	FIA_ATD.I User attribute definition	Identifies the TOE maintained subject security attributes of TOE maintained objects.
	FMT_MOF.I Management of security function behaviour	Defines the restrictions enforced by the DAC SFP to modify roles associated with administrators managed by the TOE and used to enforce the DAC SFP.
	FMT_MSA.I Management of security attributes	Only authorized NetApp Administrators responsible for the management of TOE security may modify, delete or add the security attributes (TOE User UID and Primary TOE User GID) maintained locally by the TOE and used to enforce the DAC SFP.
	FMT_MTD.I(a) Management of TSF data	Defines the restrictions enforced by the DAC SFP to modify user accounts and roles managed by the TOE and used to enforce the DAC SFP.
	FMT_MTD.I(b) Management of TSF data	Defines the restrictions enforced by the DAC SFP to modify the listening state of the TOE.
	FMT_SMF.I Specification of management functions	Defines the TSF management functions provided by the TOE that ensures the TOE's SFPs can be enforced.
O.STRONG_PWD The TOE must ensure that all passwords will be at least 8 characters in length and will consist of at least one number and at least two alphabetic characters. Password construction will be complex enough to avoid use of passwords that are easily guessed or otherwise left vulnerable, e.g. names, dictionary words, phone numbers, birthdays, etc. should not be used.	FIA_SOS.I Verification of secrets	The TOE ensures that all passwords will be at least 8 characters in length and will consist of at least one number and at least two alphabetic characters.
O.INACTIVE The TOE will terminate an inactive management session after a	FTA_SSL.3 TSF-initiated termination	The TOE will terminate an administrator's session after a configurable interval of time.

Objective	Requirements Addressing the Objective	Rationale
configurable interval of time.		
O.TIMESTAMP The TOE will provide a reliable timestamp for use by the TOE.	FPT_STM.1 Reliable Time Stamps	The Operating System Kernel will provide a reliable timestamp for use by the TOE.

8.5.2 Security Assurance Requirements Rationale

EAL2 was chosen to provide a low to moderate level of assurance that is consistent with good commercial practices. As such, minimal additional tasks are placed upon the vendor assuming the vendor follows reasonable software engineering practices and can provide support to the evaluation for design and testing efforts. The chosen assurance level is appropriate with the threats defined for the environment. The TOE is expected to be in a non-hostile position and embedded in or protected by other products designed to address threats that correspond with the intended environment. At EAL2, the TOE will have incurred a search for obvious flaws to support its introduction into the non-hostile environment. The augmentation of ALC_FLR.3 was chosen to give greater assurance of the developer's on-going flaw remediation processes.

8.5.3 Dependency Rationale

This ST does satisfy all the requirement dependencies of the Common Criteria. Table 26 lists each requirement to which the TOE claims conformance with a dependency and indicates whether the dependent requirement was included. As the table indicates, all dependencies have been met.

Table 26 Functional Requirements Dependencies

SFR ID	Dependencies	Dependency Met	Rationale
FAU_GEN.1	FPT_STM.1	✓	
FAU_GEN.2	FIA_UID.2	✓	Although FAU_GEN.2 is dependent on FIA_UID.1 which is not claimed, the dependency SFR is substituted by FIA_UID.2 which is hierarchical to FIA_UID.1 and claimed because the TOE does not permit any TSF-mediated actions before users are identified.
	FAU_GEN.1	✓	
FAU_SAR.1	FAU_GEN.1	✓	
FAU_SAR.2	FAU_SAR.1	✓	
FAU_STG.1	FAU_GEN.1	✓	
FAU_STG.4	FAU_STG.1	✓	
FDP_ACC.1	FDP_ACF.1	✓	
FDP_ACF.1	FDP_ACC.1	✓	
	FMT_MSA.3	✓	
FIA_AFL.1	FIA_UAU.2	✓	Although FIA_AFL.1 is dependent on FIA_UID.1 which is not claimed, the dependency SFR is substituted by FIA_UID.2

SFR ID	Dependencies	Dependency Met	Rationale
			which is hierarchical to FIA_UID.1 and claimed because the TOE does not permit any TSF-mediated actions before users are identified.
FIA_ATD.1	No dependencies		
FIA_SOS.1	No dependencies		
FIA_UAU.2	FIA_UID.2	✓	Although FIA_UAU.2 is dependent on FIA_UID.1 which is not claimed, the dependency SFR is substituted by FIA_UID.2 which is hierarchical to FIA_UID.1 and claimed because the TOE does not permit any TSF-mediated actions before users are identified.
FIA_UID.2	No dependencies		
FMT_MOF.1	FMT_SMF.1	✓	
	FMT_SMR.1	✓	
FMT_MSA.1	FMT_SMR.1	✓	
	FMT_SMF.1	✓	
	FDP_ACC.1	✓	
FMT_MSA.3	FMT_MSA.1(a)	✓	
	FMT_MSA.1(b)	✓	
	FMT_SMR.1	✓	
FMT_MTD.1(a)	FMT_SMR.1	✓	
	FMT_SMF.1	✓	
FMT_MTD.1(b)	FMT_SMR.1	✓	
	FMT_SMF.1	✓	
FMT_SMF.1	No dependencies		
FMT_SMR.1	FIA_UID.2	✓	Although FMT_SMR.1 is dependent on FIA_UID.1 which is not claimed, the dependency SFR is substituted by FIA_UID.2 which is hierarchical to FIA_UID.1 and claimed because the TOE does not permit any TSF-

SFR ID	Dependencies	Dependency Met	Rationale
			mediated actions before users are identified.
FPT_SEP_EXT.I	No dependencies		
FPT_STM.I	No dependencies		
FTA_SSL.3	No dependencies		



Acronyms and Terms

This section describes the acronyms and terms.

9.1 Terminology

Table 27 Terms

Name	Definition
Target network	The domain of network and managed devices to be analyzed by the TOE.

9.2 Acronyms

Table 28 Acronyms

Acronym	Definition
ACE	Access Control Entry
ACL	Access Control List
AD	Active Directory
AES	Advanced Encryption Standard
ANSI	American National Standards Institute
BMC	Baseboard Management Controller
CC	Common Criteria
CEM	Common Evaluation Methodology
CIFS	Common Internet File System
CM	Configuration Management
CSP	Critical Security Parameters
CTR	Counter Mode
DAC	Discretionary Access Control
DP	Double Parity
DRBG	Deterministic Random Bit Generator
DSA	Digital Signature Algorithm
EAL	Evaluation Assurance Level
EC	Elliptical Curve
FC	Fibre Channel
FAS	Fabric Attached Storage

Acronym	Definition
FCP	Fibre Channel Protocol
FQDN	Fully Qualified Domain Name
GB	Gigabyte
GID	Group Identifier
GUI	Graphical User Interface
HDD	Hard Disk Drive
HMAC	Hashed Message Authentication Code
HTTP	Hypertext Transfer Protocol
HTTPS	Hypertext Transfer Protocol Secure
IP	Internet Protocol
iSCSI	Internet Small Computer System Interface
IT	Information Technology
JRE	Java Runtime Environment
LDAP	Lightweight Directory Access Protocol
LUN	Logical Unit Numbers
MAN	Manual
NAS	Network Attached Storage
NFS	Network File System
NIS	Network Information Service
NIST	Institute of Standards and Technology
NTFS	New Technology File System
NTLM	New Technology Local Area Network Manager
OS	Operating System
PP	Protection Profile
RAID	Redundant Array of Independent Disks
RAM	Random Access Memory
RFC	Request for Comment
RLM	Remote Local Area Network (LAN) Management
RSH	Remote Shell
SAN	Storage Area Network
SAR	Security Assurance Requirement
SAS	Serial Attached SCSI
SATA	Serial Advanced Technology Attachment

Acronym	Definition
SCSI	Small Computer Systems Interface
SD	Security Descriptor
SFP	Security Functional Policy
SFR	Security Functional Requirement
SHA	Secure Hash Algorithm
SID	Security Identifier
SP	Service Processor
SSH	Secure Shell
SSL	Secure Sockets Layer
ST	Security Target
TCP	Transport Control Protocol
TFTP	Trivial File Transfer Protocol
TOE	Target of Evaluation
TSC	TOE Scope of Control
TSF	TOE Security Functionality
TSP	TOE Security Policy
UDP	User Datagram Protocol
UID	User Identifier
WAFL	Write Anywhere File Layout®

NetApp provides no representations or warranties regarding the accuracy, reliability or serviceability of any information or recommendations provided in this publication, or with respect to any results that may be obtained by the use of the information or observance of any recommendations provided herein. The information in this document is distributed AS IS, and the use of this information or the implementation of any recommendations or techniques herein is a customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. This document and the information contained herein must be used solely in connection with the NetApp products discussed in this document.

© 2011 NetApp, Inc. All rights reserved. No portions of this document may be reproduced without prior written consent of NetApp. Specifications are subject to change without notice. NetApp, the NetApp logo, Data ONTAP, and WAFL are trademarks or registered trademarks of NetApp, Inc. in the United States and/or other countries. Windows is a registered trademarks of Microsoft Corporation. UNIX is a registered trademark of The Open Group. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such.

Prepared by:
Corsec Security, Inc.

The logo for Corsec, featuring the word "Corsec" in a bold, dark red serif font. The text is enclosed within a white, horizontally-oriented oval that has a subtle 3D effect with a grey shadow on the right side.

13135 Lee Jackson Memorial Highway
Suite 220
Fairfax, VA 22033
United States of America

Phone: +1 703 267 6050
Email: info@corsec.com
<http://www.corsec.com>

